



ASA-715-02

3. A check including the amount of \$690.00 is enclosed to cover the Filing Fee.

4. Cancel claims 2-19 before calculating the Filing Fee.

5. The Commissioner is hereby authorized to charge any additional fees which may be required, or to credit any overpayment, to Deposit Account No. 50-1417. A duplicate copy of this Request is enclosed for this purpose.

6. Amend the specification by inserting, before the first line:

--This is a continuation application of U.S. Serial No. 09/073,857, filed May 7, 1998.--.

7. New drawings are enclosed, forty (40) sheets, Figs. 1-45.

8. The power of attorney is set forth in the Declaration in the prior application or an associate power of attorney is hereby granted to:

Jeffrey M. Ketchum, Registration No. 31,174
Shrinath Malur, Registration No. 34,663
John R. Mattingly, Registration No. 30,293
Daniel J. Stanger, Registration No. 32,846
Gene W. Stockman, Registration No. 21,021.

There is a new correspondence address.

Address all future correspondence to:

MATTINGLY, STANGER & MALUR, P.C.
104 East Hume Avenue
Alexandria, Virginia 22301
(703) 684-1120.

9. The prior application is assigned to Hitachi, Ltd.


10. Priority of the following Japanese patent applications is claimed under 35 U.S.C. § 119:

No. 9-122323, filed May 13, 1997; and
No. 9-216737, filed August 11, 1997.

The certified priority documents have been filed in prior application Serial No. 09/073,857.

The undersigned hereby declares and verifies that the enclosed application is a true copy of the latest signed prior application Serial No. 09/073,857, as originally filed on May 7, 1998, and no amendment referred to in the declaration filed to complete the prior application introduced new matter into the prior application.

The undersigned declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.



Daniel J. Stanger
Registration No. 32,846
Attorney for Applicants

MATTINGLY, STANGER & MALUR, P.C.
104 East Hume Avenue
Alexandria, Virginia 22301
(703) 684-1120
Date: August 29, 2000

ASA-715
E3911-01ES

Title of the Invention

MOBILE NODE, MOBILE AGENT-AND NETWORK SYSTEM

Inventors

Tatsuya WATANUKI,

Tetsuo OURA,

Sunao SAWADA.

006250" 09661960

BACKGROUND OF THE INVENTION

This invention relates to a mobile node, a mobile agent and a network system. More particularly, this invention relates to a control method which assists the movement of a node between an IP (Internet Protocol) network capable of executing communication in accordance with both IP version 4 and an IP version 6 and an IP network capable of executing communication in accordance with only the IP version 4 or an IP network capable of executing communication in accordance with only the IP version 6, a mobile agent, and a network system for assisting the movement of the node.

With a drastic development of small and light-weight nodes and the Internet, the demand for taking out a node from an office or a home to utilize it everywhere has been increased. When the node is moved to other network in the conventional network environment making use of the TCP/IP (Transmission Control Protocol/Internet Protocol), however, setting of the IP address, which is the information for primarily identifying the node in the IP network, must be changed so as to match with the foreign or visiting network environment.

Even if this change of setting of the IP address is automatically made by utilizing a DHCP (Dynamic Host Configuration Protocol) described in RFC (Request

5 in the network before the movement cannot be maintained
in succession.

10 (network layer) of an OSI (Open Systems Interconnection)
reference model and this protocol pertains to the IP
version 4 (hereinafter called the "IPv4") that has gained
a wide application in the Internet and the IP version 6
(hereinafter called the "IPv6") the specification of
15 which has now been stipulated so as to solve the problems
of address exhaustion in the IPv4. As to these IPv4 and
IPv6, "IP Mobility Support in IPv4") (hereinafter called
"Mobile IPv4") described in RFC2002 and "Mobility Support
in IPv6") (hereinafter called "Mobile IPv6") described in
20 IETF (Internet Engineering Task Force) draft (the latest
version of which is "draft-ietf-mobile-ip-ipv6-02.txt")
are examples of the known references.

25 length of 32 bits while the term "IPv6" designates an IP
address having an address length greater than 32 bits.

By making use of these Mobile IPv4 and Mobile IPv6, a user can execute communication in the same way

5 other node before the movement.

10 router, and so forth.

20 IPv6 (hereinafter called the "IPv6 node") and a network
(hereinafter called the "IPv4/v6 network") comprising
those nodes which execute communication by utilizing both
of IPv4 and IPv6 in mixture (hereinafter called the
"IPv4/v6 node"), the IPv4 nodes and the Ipv6 nodes.

25 To beginning with, let's consider the case
where the Ipv4/v6 network is the one that supports both
of Mobile IPv4 and Mobile IPv6. In the Mobile IPv4,
messages are exchanged between a mobile node moving

between the networks and a mobile agent (hereinafter called the "IPv4 mobile agent") for assisting the movement of the mobile node which executes communication by utilizing the IPv4, in accordance with the Mobile IPv4
5 procedures. Similarly, in the Mobile IPv6, messages are exchanged between a mobile node moving between the networks and a mobile agent (hereinafter called the "IPv6 mobile agent") for assisting the movement of the mobile node that executes communication by utilizing the IPv6,
10 in accordance with the Mobile IPv6 procedures.

Let's consider the case where the IPv4/v6 mobile node supporting both of Mobile IPv4 and Mobile IPv6 inside the IPv4/v6 network moves to another IPv4/v6 network. Because the foreign IPv4/v6 network can execute
15 communication by utilizing both of IPv4 and IPv6, the IPv4/v6 mobile node can exchange the messages with both of the IPv4 mobile agent and the IPv6 mobile agent on the network in accordance with the procedures of the Mobile IPv4 and the Mobile IPv6. Therefore, the movement of
20 this IPv4/v6 mobile node between the networks is supported by both of the Mobile IPv4 and the Mobile IPv6. In consequence, the IPv4/v6 mobile node that has moved to the foreign network can successively execute communication without changing setting of the IP address and
25 without cutting off the network connection that has been established already with other IPv4 node or the IPv6 node before its movement by utilizing the IPv4 or IPv6. It can also execute afresh communication with other node by

utilizing the IPv4 and the IPv6.

Next, let's consider the case where the IPv4/v6 mobile node moves from the IPv4/v6 network to the IPv4 network which can execute communication in accordance with only the IPv4 and supports the Mobile IPv4. In this case, since communication by utilizing the IPv4 is possible between the IPv4/v6 mobile node and the IPv4 mobile agent, the assistance of movement of this mobile node between the networks by the Mobile IPv4 can be made. Therefore, the IPv4/v6 mobile node can execute communication successively after the movement without cutting off the network connection that has been previously established already with other IPv4 node by utilizing the IPv4. The mobile node can also execute communication afresh by utilizing the IPv4.

However, the mobile node cannot execute communication by utilizing the IPv6 on the IPv4 network and consequently, the exchange of the message on the IPv4 network in accordance with the Mobile IPv6 procedure becomes impossible between the IPv4/v6 mobile node and the IPv6 mobile agent. In other words, the assistance of the movement of the mobile node to the IPv4 network in accordance with the Mobile IPv6 becomes impossible and the IPv4/v6 mobile node that has moved to the IPv4 network cannot maintain the network that has been established already with other IPv6 node by utilizing the IPv6 before the movement and consequently, cannot execute communication. This mobile node cannot execute afresh

communication with other node on the IPv4 network by utilizing the IPv6, either.

Similarly, let's consider the case where the IPv4/v6 mobile node moves from the IPv4/v6 network to the IPv6 network which can execute communication by utilizing only the IPv6 and supports the Mobile IPv6. In this case, too, the IPv4/v6 mobile node cannot execute communication by utilizing the IPv4 on the IPv6 network. In consequence, the exchange of the message in accordance with the Mobile IPv4 procedure is not possible on the IPv6 network between the IPv4/v6 mobile agent and the IPv4 mobile agent, so that the assistance of the movement of this mobile node to the IPv6 network in accordance with the Mobile IPv4 becomes impossible on the IPv6 network.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a mobile node, a mobile agent and a network system which can successively maintain the network connection the IPv6 that has been established already by utilizing the IPv6 before the movement when the IPv4/v6 mobile node moves from the IPv4/v6 network to the IPv4 network, and which can also execute afresh communication by utilizing the IPv6.

It is another object of the present invention to provide a control method of a mobile node, a mobile agent and a network system for assisting the movement,

According to one aspect of the present invention, there is provided a mobile node including IPv4 (Internet Protocol version 4) processing means for executing services in accordance with the IPv4, IPv6 (Internet Protocol version 6) processing means for executing services in accordance with the IPv6, and communication processing means for executing transmission/reception control of packets to and from networks, and moving between IP networks, wherein the mobile node further comprises movement registration processing means for adding an IPv4 header (IP header used for the IPv4), in which the IPv4 address of a mobile agent is set as a foreign address and the IPv4 address of the mobile node usable in a foreign IPv4 network is set as a home address, to a message used for the IPv6 for registering the movement to a mobile agent connected to the IPv4/v6 network to assist the movement of the mobile node, and transmitting the message, when this mobile node moves from the IPv4/v6 network (a network capable of executing communication by utilizing both of the IPv4 and the IPv6) to an IPv4 network (a network capable of

In the mobile node according to the aspect of the invention described above, the IPv4 header is added to the message used for the IPv6 and the message is then transmitted. Therefore, the message to be used for the IPv6 can be substantially transmitted from the foreign IPv4 network, and the information necessary for the network connection utilizing the IPv6 can be registered to the mobile agent.

In the mobile agent according to the aspect of the invention described above, after the IPv4 header is added to the IPv6 packet, the packet is transmitted.

In the mobile agent according to the aspect of the invention described above, after the IPv4 header is added to the IPv6 packet, the packet is transmitted.

Therefore, the IPv6 packet can be transmitted substantially from the foreign IPv4 network.

According to still another aspect of the present invention, there is provided a mobile node including IPv4 processing means for executing services in accordance with the IPv4, IPv6 processing means for executing services in accordance with the IPv6 and communication processing means for executing transmission/reception control of packets to and from networks, and moving between the networks, wherein the mobile node further comprises movement detection means for detecting whether the mobile node has moved from the network in which a mobile agent used by this mobile node exists to another IPv4 network or to an IPv6 network (network capable of executing communication by utilizing only the IPv6) or to an IPv4/v6 network, and movement status management means for managing the movement status so detected.

Since the mobile node according to this aspect of the invention automatically detects the kind of the network in which the mobile node itself exists at present and manages itself, the necessity for adding an IPv4 header to the message used for the IPv6 or the IPv6 packet can be judged appropriately.

According to still another aspect of the present invention, there is provided a mobile agent for assisting the movement of a mobile node executing communication by utilizing an IPv6, including IPv4

processing means for executing services in accordance
with an IPv4, IPv6 processing means for executing
services in accordance with the IPv6 and communication
processing means for executing transmission/reception
5 control of packets to and from networks, wherein the
mobile agent further comprises mobile node management
means for managing the IPv4 address of a mobile node
usable in a foreign IPv4 network when receiving a message
for use in the IPv6 for registering the movement, to
10 which an IPv4 header transmitted from the mobile node to
the IPv6 network to the mobile agent when the mobile
agent moves to the IPv4 network is added, and movement
assistance processing means for adding an IPv4 header, in
which the IPv4 address of the mobile node usable in a
15 foreign IPv4 network is set as a foreign address and the
IPv4 address of the mobile agent is set as a home
address, to the message used for the IPv6 to permit
registration of the movement to the mobile node, and
transmitting the message.

20 In the mobile agent according to the aspect of
the invention described above, after the IPv4 header is
added to the message used for the IPv6 and then the
message is transmitted. Therefore, the message used for
the IPv6 can be transmitted substantially to the mobile
25 node that is moving to the IPv4 network.

According to still another aspect of the
present invention, there is provided a mobile agent for
assisting the movement of a mobile node executing

5

15

20

5 as a home IPv4 address, to the received IPv6 packet when receiving this IPv6 packet transmitted by other node to the mobile node that has moved to the IPv4 network, and for transmitting this IPv4 encapsulated IPv6 packet.

10 the invention described above, after the IPv4 header is added to the IPv6 packet, the IPv6 packet is transmitted. Therefore, the IPv6 packet can be transmitted substantially from the node on the IPv6 network or on the IPv4/v6 network to the mobile node that is moving to the

15 IPv4 network.

20 the connection device and a third network, wherein the mobile agent according to the fourth, fifth or sixth aspect is provided on the IPv4/v6 network and the mobile node according to the first, second or third aspect is provided on the IPv4/v6 network or on the IPv4 network.

25 The network system according to the aspect described above can successively keep the network connection, which utilizes the IPv6 and has been already established before the movement of the IPv4/v6 node, when

the IPv4/v6 node moves from the IPv4/v6 network to the IPv4 network, and can execute afresh communication by utilizing the IPv6.

According to still another aspect of the

5 present invention, there is provided a method of controlling a mobile node by a mobile agent in a network system in which a first IP network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing communication in accordance with only the first kind of IP, so

10 that the mobile node capable of executing communication in accordance with the second kind of IP can communicate with other node belonging to the first IP network in accordance with the second kind of IP when the mobile

15 node moves from the first IP network to the second IP network, which method comprises the steps of adding a first kind of IP header, in which the IP address of a second mobile agent belonging to the second IP network in accordance with the first kind of IP is set as a foreign

20 address by the first mobile agent belonging to the first IP network and the IP address of the first mobile agent in accordance with the first kind of IP is set as a home address, to an IP packet transmitted in accordance with the second kind of IP from other node to the mobile node,

25 and transmitting the IP packet to the second mobile agent; and deleting the first kind of IP header by the second mobile agent and transmitting the IP packet to the mobile node.

Alternatively, it is possible to employ a method comprising adding the first kind of IP header, in which the IP address of the first mobile agent in accordance with the first kind of IP is set as a foreign address by the second mobile agent and the IP address of the second mobile agent in accordance with the first kind of IP is set as a home address, to a movement registration request message in accordance with the second kind of IP that is received from the mobile node, transmitting this message to the first mobile agent, adding the first kind of IP header, in which the IP address of the second mobile agent in accordance with the first kind of IP is set as a foreign address by the first mobile agent and the IP address of the first mobile agent in accordance with the first kind of IP is set as a home address, to a message in accordance with the second kind of IP for

Alternatively, it is possible to employ a method comprising adding the first kind of IP header, in which the IP address of the first mobile agent in accordance with the first kind of IP is set as a foreign address by the second mobile agent and the IP address of the second mobile agent in accordance with the first kind of IP is set as a home address, to a movement registration request message in accordance with the second kind of IP that is received from the mobile node, transmitting this message to the first mobile agent, adding the first kind of IP header, in which the IP address of the second mobile agent in accordance with the first kind of IP is set as a foreign address by the first mobile agent and the IP address of the first mobile agent in accordance with the first kind of IP is set as a home address, to a message in accordance with the second kind of IP for

The present invention provides also a network system for assisting the movement of the mobile node, having the features described above.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 2 is a structural view of a movement status management table used in an IPv4/v6 mobile node shown in Fig. 1;

Fig. 4 is a flowchart showing an IPv4/v6 movement processing in the IPv4/v6 mobile node shown in Fig. 1;

Fig. 6 is a flowchart showing an IPv4 movement registration processing in the IPv4/v6 mobile node shown in Fig. 1;

Fig. 7 is a flowchart showing an IPv6 movement registration processing in the IPv4/v6 mobile node shown

Fig. 8 is a flowchart showing an IPv4-only movement registration processing in the IPv4/v6 mobile node shown in Fig. 1;

Fig. 10 is a flowchart showing an IPv6 movement assistance processing in an IPv6 mobile agent shown in Fig. 1;

Fig. 12 is a flowchart showing a transfer-to-
15 other node processing in the IPv6 mobile agent shown in
Fig. 1;

Fig. 14 is a structural view of an IPv4
20 encapsulated IPv6 movement registration request message;

Fig. 16 is a structural view of an IPv4 encapsulated IPv6 movement registration permission message;

Fig. 18 is a structural view showing an example

Fig. 19 is an explanatory view showing a structural example of a mobile node management table used in a home IPv6 mobile agent shown in Fig. 18;

5 Fig. 20 is an explanatory view showing a structural example of a mobile agent address table used in a foreign IPv6 mobile agent shown in Fig. 18;

Fig. 21 is an explanatory view showing a structural example of a movement assistance management table used in the foreign IPv6 mobile agent shown in Fig. 18;

Fig. 22 is an operation flowchart showing an example of the procedure of an IPv4 movement processing in an IPv4/v6 mobile node shown in Fig. 18;

15 Fig. 23 is an operation flowchart showing an example of the procedure of an IPv6 movement processing in the IPv4/v6 mobile node shown in Fig. 18;

Fig. 24 is an operation flowchart showing an example of the procedure of an IPv6 movement assistance processing in a home IPv6 mobile agent shown in Fig. 18;

Fig. 25 is an operation flowchart showing an example of the procedure of a foreign IPv6 mobile agent shown in Fig. 18;

Fig. 26 is an operation flowchart showing an
25 example of the procedure of a transfer-to-foreign IPv6
mobile agent processing in the home IPv6 mobile agent
shown in Fig. 18;

Fig. 27 is an operation flowchart showing an

example of the procedure of a transfer-to-other node processing in the home IPv6 mobile agent shown in Fig. 18;

Fig. 28 is an operation flowchart showing an
5 example of the procedure of a transfer-to-home IPv6
mobile agent processing in the foreign IPv6 mobile agent
shown in Fig. 18;

Fig. 29 is an operation flowchart showing an example of the procedure of a transfer-to-mobile node processing in the foreign IPv6 mobile agent shown in Fig. 18;

Fig. 30 is an explanatory view showing a structural example of an IPv6 movement registration request message;

15 Fig. 31 is an explanatory view showing a structural example of a packet obtained by encapsulating an IPv6 encapsulated IPv6 packet by IPv4 encapsulation;

Fig. 32 is a structural view showing another example of a network to which the present invention is applied;

Fig. 33 is an explanatory view showing a structural example of a mobile node management table used in a home IPv4 mobile agent shown in Fig. 32;

Fig. 34 is an explanatory view showing a structural example of a mobile agent address table used in the foreign IPv4 mobile node shown in Fig. 32;

Fig. 35 is an explanatory view showing a structural example of a movement assistance management table

Fig. 36 is an operation flowchart showing an example of the procedure of an IPv4 movement assistance processing in a home IPv4 mobile agent shown in Fig. 32;

5 Fig. 37 is an operation flowchart showing an example of the procedure of the foreign IPv4 movement assistance processing in the foreign IPv4 mobile agent shown in Fig. 32;

Fig. 38 is an operation flowchart showing an
10 example of the procedure of a transfer-to-foreign IPv4
mobile agent processing in a home IPv4 mobile agent shown
in Fig. 32;

Fig. 39 is an operation flowchart showing an example of the procedure of a transfer-to-other node processing in the home IPv4 mobile agent shown in Fig. 32;

Fig. 40 is an operation flowchart showing an example of the procedure of a transfer-to-home IPv4 mobile agent in the foreign IPv4 mobile agent shown in 20 Fig. 32;

Fig. 41 is an operation flowchart showing an example of the procedure of a transfer-to-mobile node processing in the foreign IPv4 mobile agent shown in Fig. 32;

25 Fig. 42 is an explanatory view showing a structural example of an IPv4 movement registration request message;

Fig. 43 is an explanatory view showing a

structural example of a packet obtained by IPv6 encapsulation of an IPv4 movement registration permission message;

Fig. 44 is an explanatory view showing a structural example of a packet obtained by IPv6 encapsulation of an IPv4 movement registration request message; and

Fig. 45 is an explanatory view showing a structural example of a packet obtained by IPv6 encapsulation of an IPv4 packet.

10 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, preferred embodiments of the present invention will be explained with reference to the accompanying drawings.

Fig. 1 is a structural view showing a network system according to one embodiment of the present invention.

This network system 1 includes a LAN (Local Area Network)-a 100 which makes use of both an IPv4 and an IPv6, a LAN-b 101 which makes use of only the IPv4 and a WAN (Wide Area Network) 102 which connects the LAN-a 100 and the LAN-b 101 by a public line or an exclusive line.

On the LAN-a 100 exist an IPv4 node 103, an IPv6 node 104, an IPv4 mobile agent-a 105 for assisting the movement of a node executing communication by utilizing the IPv4 by the procedure in accordance with a Mobile IPv4 between the networks, an IPv4/v6 mobile node

106 and an IPv6 mobile agent 107 for assisting the movement of the node which executes communication by utilizing the IPv4 and IPv6 and also executes communication by utilizing the IPv6 between the networks. The
5 IPv6 mobile agent 107 functions also as a router and connects the LAN-a 100 and the WAN 102.

An IPv4 mobile agent-b 108 and a router 109 exist on the LAN-b 101. The router 109 connects the LAN-b 101 and the WAN 102.

10 In this embodiment, the following IP addresses are allocated, respectively:

	IPv4 address	IPv6 address
LAN-a 100	"10.0.0.0"	"::11.0.0.0"
IPv4 node 103	"10.0.0.10"	
15 IPv6 node 104		"::11.0.0.30"
IPv4/v6 mobile node 106	"10.0.0.1"	"::11.0.0.1"
IPv4 mobile agent-a 105	"10.0.0.11"	
IPv6 mobile agent 107	"10.0.0.20"	"::11.0.0.20"
LAN-b 101	"20.0.0.0"	
20 IPv4 mobile agent-b 108	"20.0.0.11"	

The IPv4/v6 mobile node 106 includes an IPv4/v6 movement processing portion 114 for executing various processings when the node moves to another network, a movement detection processing portion 115 for executing a
25 detection processing which detects the movement to another network, an IPv4 movement registration processing portion 116 for executing a movement notification processing which notifies the movement of the node to

another IPv4 network or to an IPv4/v6 network, to the
IPv4 mobile agent-a 105, an IPv6 movement registration
processing portion 117 for executing a movement
notification processing which notifies the movement of
5 the node to another IPv6 network or to the IPv4/v6
network, to the IPv6 mobile agent 107, an IPv4-only move-
ment registration processing portion 118 for executing a
movement notification processing which notifies the
movement of the node to another IPv4 network to the IPv6
10 mobile agent 107, a movement status management table 119
for managing the movement status, an IPv4 processing
portion 111 for executing a processing in accordance with
the services offered by the IPv4, an IPv6 processing
portion 112 for executing a processing in accordance with
15 the services offered by the IPv6, an IPv6 packet
transmission processing portion 113 for executing a
transmission processing of the IPv6 packet, and a
communication processing portion 110 for executing a
transmission/reception control of the packet to and from
20 the LAN.

Among the constituent elements of the IPv4/v6
mobile node 106 described above, the present invention
disposes specifically the movement detection processing
portion 114, the IPv4-only movement registration
25 processing portion 118, the IPv6 packet transmission
processing portion 113 and the movement status management
table 119.

The IPv6 mobile agent 107 includes an IPv6

movement assistance processing portion 121 which receives the movement report (a report representing the movement to the IPv6 network or to the IPv4/v6 network) from the IPv6 mobile node (not shown in the drawing) effecting communication by utilizing the IPv4/v6 mobile node 106 or IPv6 and moving between the networks, and assists the mobile node, a mobile node management table 126 for managing the movement status information of the mobile nodes, an IPv4 processing portion 122 for executing a processing in accordance with the services offered by the IPv4, a transfer processing portion 123 to another node, for transferring the packet which is transmitted by the IPv4/v6 mobile node 106 to the IPv6 node 104, an IPv6 processing portion 124 for executing a processing in accordance with the services offered from the IPv6, a transfer processing portion 125 to a mobile node, for transferring the packet which is transmitted from the IPv6 node 104 to the IPv4/v6 mobile node 106, and a communication processing portion 120 for executing transmission/reception control of the packet to the LAN.

Among the constituent elements of the IPv6 mobile agent 107 described above, it is the IPv6 movement assistance processing portion 121, the transfer processing portion 123 to another node, the transfer processing portion 125 to a mobile node, and a mobile node management table 126 that constitute the characterizing part of the present invention.

Fig. 2 shows a structural example of the

movement status management table 119.

This movement status management table 119 has the following fields:

* own IPv4 address 200:

5 This is the IPv4 address of the IPv4/v6 mobile node 106 on the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* own IPv4 network address 201:

10 This is the IPv4 network address of the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the Ipv4/v6 mobile node 106 exists.

* own IPv6 address 202:

15 This is the IPv6 address of the IPv4/v6 mobile node 106 on the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* own IPv6 network address 203:

20 This is the IPv6 network address of the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* IPv4 mobile agent IPv4 address 204:

25 This is the IPv4 address of the IPv4 mobile agent-a 105 on the LAN-a 100 on which the IPv4 mobile agent-a 105 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* IPv6 mobile agent IPv4 address 205:

This is the IPv4 address of the IPv6 mobile

00000000000000000000000000000000

agent 107 on the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* IPv6 mobile agent IPv6 address 206:

5 This is the IPv6 address of the IPv6 mobile agent 107 on the LAN-a 100 on which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists.

* post-movement IPv4 network address 207:

10 This is the IPv4 network address of the network on which the IPv4/v6 mobile node 106 exists at the present moment.

* pre-movement IPv4 network address 208:

 This is the IPv4 network address of the network
15 before the IPv4/v6 mobile node 106 moves.

* post-movement IPv6 network address 209:

 This is the IPv6 network address of the network in which the IPv4/v6 mobile node 106 exists at the present moment. When the network existing at present is
20 the IPv4 network, "NULL" is set.

* pre-movement IPv6 network address 210:

 This is the IPv6 network address of the network before the IPv4/v6 mobile node 106 moves. When the network before the movement is the IPv4 network, "NULL"
25 is set.

 Incidentally, the network address of the LAN-a 100 in which the IPv6 mobile agent 107 for assisting the movement of the IPv4/v6 mobile node 106 exists is set at

00000000000000000000000000000000

5 210.

This mobile node management table 126 includes the following entries:

This is the IPv6 address of the mobile node the movement of which is assisted by the IPv6 mobile agent 107.

15 This is the IPv6 address on the network on
which the mobile node exists at the present moment. When
the network existing at present is the IPv4 network,
"NULL" is set.

20 This is the IPv4 address on the network on
which the mobile node exists at the present moment. When
the network existing at present is the IPv6 network,
"NULL" is set.

Fig. 4 is a flowchart showing the IPv4/v6 movement processing 40 executed by the IPv4/v6 movement

At Step 54, the network address of the network, to which the IPv mobile agent transmitting the received IPv4 movement detection message belongs is compared with the post-movement IPv4 network address 207 inside the movement status management table 119. If they are the same network address, the flow proceeds to Step 55 and if they are different network addresses, the flow proceeds to Step 60.

At Step 56, the network address of the network
15 to which the IPv6 mobile agent transmitting the IPv6
movement detection message received belongs is compared
with the post-movement IPv6 network address 209 inside
the movement status management table 119. If they are
the same network address, the flow proceeds to Step 57
20 and if they are different network addresses, the flow
proceeds to Step 70.

25 At Step 58, whether or not the post-movement
IPv4 network address 207 inside the movement status
management table 119 and the pre-movement IPv4 network
address 208 are different addresses and whether or not

5 result proves No, the processing is completed.

movement registration processing 60.

10 processing portion 117 is caused to execute the IPv6
movement registration processing 70.

movement registration processing 80.

15 The movement detection processing 50 described
above will be explained more concretely. When the
IPv4/v6 mobile node 106 exists on the LAN-a 100 at the
present moment, it receives the IPv4 movement detection
message and the IPv6 movement detection message trans-
20 mitted by the IPv4 mobile agent-a 105 and by the IPv6
mobile agent 107, respectively. In this instance, since
the network address (= "10.0.0.0") of the LAN-a 100 to
which the IPv4 mobile agent-a 105 transmitting the IPv4
movement detection message belongs is the same as the
25 post-movement IPv4 network address 207 (= 10.0.0.0") of
the movement status table 119, it is possible to know
that the mobile node does not move to another IPv4
network or another IPv4/v6 network. Therefore, the flow

proceeds from Step 54 to Step 55 but Step 60 (IPv4 movement registration processing) is not executed. Since the network address (= ":: 11.0.0.0") of the network to which the IPv6 mobile agent 107 transmitting the IPv6 movement detection message belongs is the same as the post-movement IPv6 network address 209 (= "::11.0.0.0") of the movement status table 119, it is possible to know that the mobile node does not move to another IPv6 or another IPv4/v6 network. Therefore, the flow proceeds from Step 56 to Step 57 but Step 70 (IPv6 movement registration processing) is not executed.

Next, when the IPv4/v6 mobile node 106 has moved to the LAN-b 101 at the present moment, this mobile node 106 receives the IPv4 movement detection message transmitted by the IPv4 mobile agent-b 108. Since the network address (= "20.0.0.0") of the LAN-b 101 to which the IPv4 mobile agent-b 108 transmitting the IPv4 movement detection message belongs is different from the post-movement IPv4 network address 207 (= "10.0.0.0") of the movement status table 119, it is possible to know that the IPv4/v6 mobile node 106 has moved to another IPv4 network or another IPv4/v6 network. Therefore, the flow proceeds from Step 54 to Step 60, where the IPv4 movement registration processing 60 is executed. As will be described later with reference to Fig. 6, the pre-movement IPv4 network address 208 of the movement status table 119 is updated to "10.0.0.0" and the post-movement IPv4 network address 207 is updated to "20.0.0.0", by

this IPv4 movement registration processing 60.

On the other hand, because the IPv6 mobile agent does not exist in the LAN-b 101, the IPv6 movement detection message is not received. In consequence, the flow proceeds from Step 55 to Step 57 and the processing of Steps 56 and 70 (IPv6 movement registration processing) is not executed.

Because the post-movement IPv4 network address 207 (= "20.0.0.0") of the movement status table 119 is different from the pre-movement IPv4 network address 208 (= "10.0.0.0") and because the post-movement IPv6 network address 209 (= ":: 11.0.0.0") is the same as the pre-movement IPv6 network address 210 (= ":: 11.0.0.0") after time-out, it is possible to know that the mobile node has moved to the IPv4 network. Therefore, the flow proceeds from Step 58 to Step 80 and the IPv4-only movement registration processing 80 is executed.

Incidentally, when the IPv4/v6 mobile node 106 moves to another IPv4/v6 network such as the LAN-a 100, both of the IPv4 movement detection message and the IPv6 movement detection message are received. Therefore, both of the IPv4 movement registration processing 60 and the IPv6 movement registration processing 70 are executed. On the other hand, the post-movement IPv4 network address 207 of the movement status table 119 becomes unequal (*) to the pre-movement IPv4 network address 208 and the post-movement IPv6 network address 209 becomes unequal (*) to the pre-movement IPv6 network address 210.

Therefore, the flow does not proceed from Step 58 to Step 80 and the IPv4-only movement registration processing 80 is not executed.

Fig. 6 is a flowchart showing an example of the IPv4 movement registration processing executed by the IPv4 movement registration processing portion 116. Incidentally, this IPv4 movement registration processing 60 is the processing which follows the processing procedure of the Mobile IPv4.

At Step 61, the IPv4 network address 201 of the movement status management table 119 of its own is compared with the network address of the network to which the IPv4 mobile agent transmitting the IPv4 movement detection message belongs. When they are not the same network address, it is possible to know that the mobile node has moved to another network, and the flow proceeds to Step 62. When they are the same network address, on the other hand, it is possible to know that the mobile node has returned to the LAN-a 100 in which the IPv6 mobile agent 107 assisting the movement of the IPv4/v6 mobile node 106 exists, and the flow then proceeds to Step 63.

At Step 62, the IPv4 address on the foreign network which the IPv4/v6 mobile node 106 can make use of is acquired. This IPv4 address can be acquired by utilizing a DHCP for executing automatic distribution of the addresses or by manual setting, for example.

At Step 63, the IPv4 movement registration

request message is transmitted to the IPv4 mobile agent registered to the IPv4 mobile node IPv4 address 204 of the movement status management table 119.

At Step 64, the movement registration permission message as the reply to the IPv4 movement registration request message is awaited from the IPv4 mobile agent, and after this IPv4 movement registration permission message is received, the flow proceeds to Step 65.

At Step 65, the post-movement IPv4 network address 207 of the movement status management table 119 is substituted for the pre-movement IPv4 network address 208 and then the network address of the network to which the IPv4 mobile agent transmitting the IPv4 movement detection message is substituted for the post-movement IPv4 network address 207.

The IPv4 movement registration processing 60 described above will be explained more concretely. When the IPv4/v6 mobile node 106 moves from the LAN-a 100 to the LAN-b 101, the flow proceeds from Step 61 to Step 62 and further to Step 63, and transmits the IPv4 movement registration request message to the IPv4 mobile agent-a 105. After the IPv4 movement registration permission is received from the IPv4 mobile agent-a 105, the flow proceeds from Step 64 to Step 65. Next, "10.0.0.0" is set to the pre-movement IPv4 network address 208 while "20.0.0.0" is set to the post-movement IPv4 network address 207.

5

10

20

25

IPv6 address 1301, the foreign IPv6 address 1302 and the foreign IPv4 address 303 as shown in Fig. 13. This IPv6 movement registration processing 70 sets the IPv6 address held by own IPv6 address 202 of the movement status

5 management table 119 to its own IPv6 address 1301, the foreign IPv6 address to the foreign IPv6 address 1302 and "NULL" to the foreign IPv4 address 1303.

At Step 74, the IPv6 movement registration permission message as the reply to the IPv6 movement
10 registration request message is awaited from the IPv6 mobile agent, and after this permission message is received, the flow proceeds to Step 75.

At Step 75, the post-movement IPv6 network address 209 of the movement status management table 119
15 is substituted for the pre-movement IPv6 network address 210 and then the network address of the network to which the IPv6 mobile agent transmitting the IPv6 movement detection message belongs is substituted for the post-movement IPv6 network address 209.

20 Fig. 8 is a flowchart showing an example of the IPv4-only movement registration processing executed by the IPv4-only movement registration processing portion 118.

At Step 81, the IPv4 encapsulated IPv6 movement
25 registration request message is transmitted to the IPv6 mobile agent registered to the IPv6 mobile agent IPv6 address 206 of the movement status management table 119. As shown in Fig. 14, this IPv4 encapsulated IPv6 movement

The IPv4-only movement registration processing 80 sets the IPv6 address held by the IPv6 address 202 of 15 the movement status management table 119 to its own IPv6 address 1301, "NULL" to the foreign IPv6 address 1302 and the IPv4 address at the destination to the foreign IPv4 address 1303.

At Step 82, the IPv4 encapsulated IPv6 movement registration permission request message as the reply to the IPv4 encapsulated IPv6 movement registration request message is awaited from the IPv6 mobile agent, and after this IPv4 encapsulated IPv6 movement registration permission message is received, and the flow proceeds to Step 83. Incidentally, the IPv4 processing portion 111 removes the IPv4 header from the IPv4 encapsulated IPv6 movement registration permission message (this procedure will be hereinafter called the "IPv4 decapsulation") and

delivers it to the IPv4-only movement registration processing portion 118. This IPv4 decapsulation in the IPv4 processing portion 111 is one of the services offered by the existing IPv4.

5 At Step 83, the post-movement IPv6 network address 209 of the movement status management table 119 is substituted for the pre-movement IPv6 network address 210 and then "NULL" is substituted for the post-movement IPv6 network address 209.

10 The IPv4-only movement registration processing
80 described above will be explained more concretely.
When the IPv4/v6 mobile node 106 has moved from the LAN-a
100 to the LAN-b 101, the following IPv4 encapsulated
IPv6 movement registration request message 1400 is
15 generated at Step 81.

```
* IPv4 header:
```

```
** foreign IPv4 address 1402: "10.0.0.20"
```

(IPv4 address of IPv6 mobile agent 107)

```
** home IPv4 address 1403: "20.0.0.1"
```

20 (IPv4 address that the IPv4/v6 mobile node 106 uses
afresh on the LAN-b 101)

```
* IPv6 movement registration message 1300:
```

```
** own IPv6 address 1301: "::11.0.0.1"
```

```
** foreign IPv6 address 1302: "NULL"
```

```
25  ** foreign IPv6 address 1303: "20.0.0.1"
```

The IPv4 encapsulated IPv6 movement registration permission message 1400 is transmitted to the IPv6 mobile agent 107.

Next, after the IPv4 encapsulated IPv6 movement registration permission message is received from the IPv6 mobile agent 107 at Step 82, "::11.0.0.1" is set to the pre-movement IPv6 network address 210 at Step 83 and

5 "NULL" is set to the post-movement IPv6 network address 209.

Fig. 9 is a flowchart showing an example of the IPv6 packet transmission processing 90 executed by the IPv6 packet transmission processing portion 113 of the

10 IPv6 processing portion 112 in the IPv4/v6 mobile node 106.

At Step 91, the IPv6 packet transmission request by the network application, etc., is awaited, and the flow proceeds to Step 92 if the transmission request

15 is made.

At Step 92, whether or not the IPv6 network address 209 after the movement of the movement status management table 119 is "NULL" is checked and if it is "NULL", the flow proceeds to Step 93 and if it is not,

20 the flow proceeds to Step 94.

At Step 93, since the destination is the IPv4 network, the IPv6 packet is encapsulated by IPv4 encapsulation and is transmitted. In other words, the IPv4 header 1401 is added to the IPv6 packet 1501 as

25 shown in Fig. 15, the IPv6 mobile agent IPv4 address 205 of the movement status management table 119 is set to the foreign IPv4 address 1402 of that IPv4 header 1401, the IPv4 address acquired by the foreign IPv4 network is set

to the home IPv4 address, and the IPv4 encapsulated IPv6 packet 1500 is generated and transmitted. The flow then returns to Step 91 described above.

At Step 94, since the destination is the IPv6 network or the IPv4/v6 network, the IPv6 is transmitted as such. The flow then returns to Step 91 described above.

The IPv6 packet transmission processing 90 will be explained more concretely. When the IPv4/v6 mobile node 106 moves from the LAN-a 100 to the LAN-b 101, for example, the IPv4/v6 mobile node 106 receives the transmission request of the IPv6 packet 1501 by the network application at Step 91. Then, "10.0.0.20" (IPv4 address of the IPv6 mobile agent 107) is set as the foreign IPv4 address to this IPv6 packet 1501 at Step 92 and furthermore, the IPv4 header 1401 to which "20.0.0.1" is set as the home IPv4 address 1403 is added. The IPv6 packet encapsulated by this IPv4 encapsulation is transmitted to the IPv6 mobile agent 107.

Fig. 10 is a flowchart showing an example of the IPv6 movement assistance processing 1000 executed by the IPv6 movement assistance processing portion 121 of the IPv6 mobile agent 107.

At Step 1001, whether or not the message transmission request message for detecting the IPv6 movement is received from the IPv6 mobile node (not shown in the drawing) or the IPv4/v6 mobile node 106 is checked, and if it is, the flow proceeds to Step 1002 and if it is

At Step 1002, the IPv6 movement detection message is transmitted to the node which transmits the IPv6 movement detection message transmission request message described above.

At Step 1004, whether or not the movement registration request can be accepted is checked, and if it cannot be accepted, the flow proceeds to Step 1005 and if it can, the flow proceeds to Step 1006.

At Step 1006, own IPv6 address 1301 of the IPv6
20 movement registration request message 1300 is compared
with the foreign IPv6 address 1302 and when they are the
same address, the flow proceeds to Step 1007 and when
they are different addresses, the flow proceeds to Step
1008.

25 At Step 1007, the information of the corresponding mobile node inside the mobile node management table 126 is deleted by judging that this mobile node returns to its own network. The flow then proceeds to

At Step 1008, the foreign IPv4 address 1303 inside the IPv6 movement registration request message 1300 is checked, and if "NULL" is set, the flow proceeds to Step 1009 and if it is not, the flow proceeds to Step 1010.

At Step 1010, the information of the corresponding mobile node is set to the mobile node management table 126 by judging that this mobile node has moved to the IPv4 network. In other words, "NULL" is set to the foreign IPv6 address 31 inside the mobile node management table 126 while the value of the foreign IPv4 address 1303 inside the IPv6 movement registration request message 1300 so received is set to the foreign IPv4 address 32. The flow then proceeds to Step 1012.

At Step 1012, the IPv6 movement registration

5
10

15
20

the IPv4/v6 mobile node 106 has moved from the LAN-a 100

At Step 1008, since the foreign IPv4 address 1303 (= "20.0.0.1") inside the IPv6 movement registration request message 1300 is not "NULL", the flow proceeds to Step 1010. At this Step 1010, "::11.0.0.1" is registered to the mobile node IPv6 address 30 in the mobile node management table 126 as the information of the IPv4/v6 mobile node 106, "20.0.0.1" is registered to the foreign IPv4 address 32, and "NULL" is registered to the foreign IPv6 address 31. At Step 1012, the IPv4 header 1401 to which "20.0.0.1" is set as the foreign IPv4 address 1402 and "10.0.0.20" is set as the home IPv4 address 1403 is added to the IPv6 movement registration permission message 1601 and is transmitted to the IPv4/v6 mobile node 106.

At Step 1101, reception of the IPv6 packet to the mobile node registered to the mobile node management table 126 among the IPv6 packets transmitted by the IPv6

node 104 and other IPv6 nodes (not shown in the drawing) is awaited, and after this packet is received, the flow proceeds to Step 1102.

At Step 1102, whether or not the foreign IPv6 address 31 of the corresponding mobile node inside the mobile node management table 126 is "NULL" is checked, and if it is "NULL", the flow proceeds to Step 1103 and if it is not, the flow proceeds to Step 1104.

At Step 1103, the mobile node as the destination of the IPv6 packet is judged as moving to the IPv4 network, and the IPv6 packet is encapsulated by IPv4 encapsulation and is transmitted to the IPv4 network to which the mobile node as the destination of this packet is moving. The structure of the IPv4 encapsulated IPv6 packet at this time is shown in Fig. 15. The foreign IPv4 address 32 of the corresponding mobile node inside the mobile node management table 126 is set to the foreign IPv4 address 1402 and the IPv4 address of the IPv6 mobile agent 107 is set to the home IPv4 address 1403. The flow then returns to Step 1101.

At Step 1104, the mobile node as the destination of the IPv6 packet is judged as moving to the IPv6 network or to the IPv4/v6 network, and the IPv6 header is added afresh to the IPv6 packet (this processing will be hereinafter called "IPv6 encapsulation") and is transmitted to the IPv6 network or to the IPv4/v6 network to which the mobile node is moving. In other words, as shown in Fig. 17, the IPv6 header 1701 is added to the

IPv6 packet 1704, the foreign IPv6 address 31 of the corresponding mobile node inside the mobile node management table 126 is set to the foreign IPv6 address 1702 of its IPv6 header 1701, the IPv6 address of the IPv6 mobile agent 107 is set to the home IPv6 address 1703 and the IPv6 encapsulated IPv6 packet 1700 is generated and transmitted. The flow then returns to Step 1101. Incidentally, the processing procedure for encapsulating the IPv6 packet by the IPv6 encapsulation is the procedure that follows the Mobile IPv6.

The transfer-to-mobile node processing 1100 described above will be explained more concretely. When the IPv4/v6 mobile node 106 has moved from the LAN-a 100 to the LAN-b 101, "::11.0.0.1" is set as the information of the IPv4/v6 mobile node 106 to the mobile node IPv6 address 30 inside the mobile node management table 126 by the IPv6 movement assistance processing 1000 described already, "NULL" is set to the foreign IPv6 address 31 and "20.0.0.1" is set to the foreign IPv4 address 32. Therefore, when the IPv6 mobile agent 107 receives the IPv6 packet addressed to the IPv4/v6 mobile node 106, it adds the header IPv4 header 1401, in which "20.0.0.1" is set to the foreign IPv4 address 1402 and "10.0.0.20" is set to the home IPv4 address 1403, to this IPv6 packet and transfers it to the IPv4/v6 mobile node 106 of the LAN-b 101. This IPv4 encapsulated IPv6 packet 1500 is received by the IPv4/v6 mobile node 106, is IPv4-decapsulated by the IPv4 processing portion 111 and is

In this way, even when the IPv4/v6 mobile node moves from the LAN-a 100 as the IPv4/v6 network to the LAN-b 101 as the IPv4 network, this mobile node can receive the IPv6 packet transmitted by the IPv6 node 104 of the LAN-a 100.

At Step 1201, the mobile agent awaits the reception of the IPv4 packet addressed to its own (IPv6 mobile agent 107) and when this packet is received, the flow proceeds to Step 1202.

20 At Step 1203, whether or not the home node of
the IPv4 encapsulated IPv6 packet is the mobile node
registered to the mobile node management table 126 is
checked, and if it is registered, the flow proceeds to
Step 1204 and if it is not, the flow proceeds to Step
25 1205.

At Step 1204, the IPv4 encapsulated IPv6 packet is decapsulated by IPv4 decapsulation and is transmitted to the network where the node as the destination exists.

be carried out by the movement assistance of the nodes in the IPv6 by the IPv4 mobile agent-1 105 and the IPv4 mobile agent-b 108 supporting the Mobile IPv4 as the existing method.

When the IPv4/v6 mobile node 106 returns from the LAN-b 101 to the LAN-a 100, the IPv4/v6 mobile node 106 detects the movement to the IPv6 or to the IPv4/v6 network by the movement detection processing described above. The mobile node is judged as returning to the LAN-a 100 by the IPv6 movement registration processing 70, and transmits the IPv6 movement registration request message 1300 in which "::11.0.0.1" is set to its own IPv6 address, "::11.0.0.1" which is the same as its own IPv6 address 1301 to the foreign IPv6 address 1302 and "NULL" to the foreign IPv4 address 1303, to the IPv6 mobile agent 107.

Receiving the IPv6 movement registration request message 1300, the IPv6 mobile agent 107 judges that the IPv4/v6 mobile node 106 returns to the LAN-a 100 because its own IPv6 address inside the IPv6 movement registration request message 1300 is the same as the foreign IPv6 address 1302, and omits the information on the IPv4/v6 mobile node 106 inside the mobile node management table 126. As a result, the IPv4/v6 mobile node 106 can make communication utilizing the ordinary IPv6.

Incidentally, the IPv4/v6 mobile node 106 reports its return to the LAN-a 100 to the IPv4 mobile

agent-a 105, too, by the IPv4 movement registration request message in accordance with the Mobile IPv4 processing procedure and for this reason, communication utilizing the ordinary IPv4 can be made, too.

5 The embodiment given above automatically detects the movement between the networks by utilizing the IPv4 movement detection message and the IPv6 movement detection message, but it is also possible to employ the construction in which the user of the mobile node reports
10 by himself to the movement detection processing portion 116 so as to execute the IPv4 movement registration processing 60, the IPv6 movement registration processing 70 or the IPv4-only movement registration processing 80.

Next, another embodiment of the present
15 invention will be explained with reference to the drawings.

First, the explanation will be given on the case where the IPv4/v6 mobile node moves from the IPv4/v6 network to the IPv4 network.

20 A structural example of the network system to which the present invention is applied and a structural example of the mobile agent will be explained with reference to Fig. 18. As shown in the drawing, the network system according to this embodiment includes a
25 LAN-a 1800, a LAN-b 1801 and a WAN 1802 that connects the LAN-a 1800 and the LAN-b 1801 by a public line or an exclusive line. On the LAN-a 1800 exist an IPv4 node 1803 which executes communication by utilizing only the

5

15

20

25

below:

		IPv4 address	IPv6 address
	IPv4 node 1803	"10.0.0.10"	
5	IPv6 node 1804		"11::20"
	IPv4/v6 mobile node 1806	"10.0.0.30"	"11::30"
	IPv4 mobile agent-a 1805	"10.0.0.11"	
	home IPv6 mobile agent 1807	"10.0.0.1"	"11::1"
	IPv4 mobile agent-b 1808	"20.0.0.11"	
10	foreign IPv6 mobile agent 1809	"20.0.0.1"	"21::1"

The IPv4/v6 mobile node 1806 comprises an IPv4 movement processing portion 1813 which executes a processing in accordance with the Mobile IPv4 when the node moves to another IPv4 network or to an IPv4/v6 network, an IPv6 movement processing portion 1815 which executes a processing in accordance with the Mobile IPv6 when the mobile node moves to another IPv6 network or to an IPv4/v6 network, an IPv4 processing portion 1812 which executes a processing in accordance with the services offered by the IPv4, an IPv6 processing portion 1814 which executes a processing in accordance with the services offered by the IPv6 and a communication processing portion 1811 which executes a transmission/reception control, etc. of a packet to the LAN.

25 The home IPv6 mobile agent 1807 comprises an
IPv6 movement assistance portion 1817 which assists the
movement for the mobile node (not particularly shown in

the drawing) executing communication by utilizing the IPv6 and moving between the networks or for an IPv6 mobile node 1806, a mobile node management table 1822 which manages the information of the mobile node that has moved to another IPv6 network or to the IPv4/v6 network, an IPv6 processing portion 1818 which executes a processing in accordance with the services offered by the IPv4, a transfer-to-other node processing portion 1819 which executes a transfer processing of the IPv6 packet, which is transferred from the foreign IPv6 mobile agent 1809 and is transmitted by the IPv4/v6 mobile node 1806, to the IPv6 node as the destination, an IPv6 processing portion 1820 which executes a processing in accordance with the services offered by the IPv6, a transfer-to-foreign IPv6 mobile agent processing portion 1821 which executes a transfer processing of the IPv6 packet, which is transmitted from another IPv6 node to the IPv4/v6 mobile node 1806, to the foreign IPv6 mobile agent 1809 and a communication processing portion 1816 which executes a transmission/reception control, etc. of the packet to the LAN.

The foreign IPv6 mobile agent 1809 comprises a foreign IPv6 movement assistance portion 1823 which assists the movement of the IPv4/v6 mobile node 1806 when this node 1806 moves to the network (LAN-b 1801) to which the foreign IPv6 mobile agent 1809 belongs, a movement assistance management table 1828 which manages the information of this mobile node 1806, a mobile agent

address table 1830 which registers the address information of the home IPv6 mobile agent 1807, an IPv4 processing portion 1824 which executes a processing in accordance with the services offered by the IPv4, a
5 transfer-to-mobile node processing portion 1825 which executes a processing for transferring the packet, which is transferred from the home IPv6 mobile agent 1807 and is addressed to the IPv4/v6 mobile node 1806, to the IPv4/v6 mobile node 1806, an IPv6 processing portion 1826
10 which executes a processing in accordance with the services offered by the IPv6, a transfer-to-home IPv6 mobile agent processing portion 1812 which executes a processing for transferring the IPv6 packet, which is transmitted by the IPv4/v6 mobile node 1810 to another
15 IPv6 node, to the home IPv6 mobile agent 1807, and a communication processing portion 1829 which executes a transmission/reception control, etc. of the packet to the LAN.

Among the constituent elements of the home IPv6
20 mobile agent 1807 described above, it is the IPv6 movement assistance portion 1817, the transfer-to-other node processing portion 1819, the transfer-to-foreign IPv6 mobile agent processing portion 1821 and the mobile node management table 1822 that constitute the character-
25 izing part of the present invention. Among the constituent elements of the foreign IPv6 mobile agent 1809, it is the foreign IPv6 movement assistance portion 1823, the transfer-to-mobile node processing portion

1825, the transfer-to-home IPv6 mobile agent processing portion 1827, the mobile agent address table 1830 and the mobile agent management table 1828 that constitute the characterizing part of the present invention.

5 Fig. 19 shows an example of the mobile node management table 1822. As shown in this drawing, the mobile node management table 1822 includes a mobile node IPv6 address 1920 as the IPv6 address of the mobile node, the foreign IPv6 address 1921 representing the IPv6
10 address which the mobile node makes use of in the foreign IPv6 network or in the foreign IPv4/v6 network, and a foreign IPv6 mobile agent IPv4 address 1922 representing the IPv4 address of the foreign IPv6 mobile agent 109. Here, when the mobile node moves to the IPv6 network or
15 to the IPv4/v6 network, "NULL" is set to the foreign IPv6 mobile agent IPv4 address 1922 and when the mobile node moves to the IPv4 network, the IPv4 address of the foreign IPv6 mobile agent 1809 existing inside that network is set to the address 1922. Incidentally, though
20 the drawing shows the case where the entries for a plurality of mobile nodes exist, the entry of the mobile node does not exist in this table under the initial state. Further, the updating processing of this table will be described later.

25 Fig. 20 shows an example of the mobile agent address table 1830 described above. As shown in this drawing, the mobile agent address table 1830 includes the home IPv6 mobile agent IPv4 address 2030 and the home

IPv6 mobile agent IPv6 address 2031 as the IPv4 address and the IPv6 address of all the home IPv6 mobile agents existing in the network system (though this embodiment represents only the home IPv6 mobile agent 1807 on LAN-a 5 1800). This table is set by a manager, for example.

Fig. 21 shows an example of the movement assistance management table 1828 described above. As shown in the drawing, the movement assistance management table 1828 includes a mobile node IPv6 address 2140 as 10 the IPv6 address of the IPv4/v6 mobile node 1806, a home IPv6 mobile agent IPv4 address 2141 as the IPv4 address of the home IPv6 mobile agent 1807 existing in the home network of the mobile node, and a registration flag 2142 representing whether the entry is "tentative registra- 15 tion" or "real registration". Incidentally, though this drawing represents the case where the entries for a plurality of mobile nodes exist, the entry of the mobile node does not exist in this table under the initial state. The updating processing of this table will be 20 described later.

In the construction described above, the processings of the IPv4/v6 mobile node 1806, the home IPv6 mobile agent 1807 and the foreign IPv6 mobile agent 1809 when the IPv4/v6 mobile node 1806 moves from the 25 LAN-a 1800 as the IPv4/v6 network to the LAN-b 1801 as the IPv4 network, and handling of each table described above, will be explained next in detail.

Fig. 22 is a flowchart showing an example of

5 mobile node has moved. By the way, this IPv4 movement
processing portion 1812 executes the processing in
accordance with the processing procedure of the Mobile
IPv4.

The IPv4 movement processing portion 1812 first transmits the message transmission request message for detecting the IPv4 movement as the message for requesting the transmission of the IPv4 movement detection message, which is in turn the message for detecting the movement of the mobile node to another IPv4 network or to the IPv4/v6 network (Step 2251). Incidentally, the IPv4 movement detection message is transmitted by the IPv4 mobile agent either periodically or when it receives the transmission request message of the IPv4 movement detection. Next, the IPv4 movement processing portion 1812 judges whether or not the IPv4 movement detection message is received (Step 2252). When the IPv4 movement detection message is received (Step 2252YES), the IPv4 movement processing portion 1812 judges from this message whether or not the mobile node moves to another network (Step 2253). Incidentally, the network address information is set inside the IPv4 movement detection message, and the movement is detected by comparing this address information with the IPv4 address of the IPv4/v6 mobile

When the movement of the mobile node to another network is found as a result of the judgement described above (Step 2253YES), the IPv4 movement processing

5 portion 1812 judges next whether or not the network as
the visiting network is the home network of the IPv4/v6
mobile node 1806 (the LAN-a 1800 is the home network in
this embodiment) (Step 2254). The IPv4 movement
detection message is utilized at the time of this
10 judgement, too. When it is not the home network as a
result of this judgement, (Step 2254NO), the IPv4
movement processing portion 1812 then acquires the
foreign IPv4 address that is used by the IPv4 mobile
node-a 1805 when it transfers the IPv4 packet bound to
15 the IPv4/v6 mobile node 1806 to the mobile node that is
moving to another network (Step 2255). The IPv4/v6
mobile node 1806 acquires this foreign IPv4 address from
the addresses offered by the IPv4 mobile agent-b 1808 or
by utilizing the DHCP that automatically distributes the
20 addresses, or by manual setting.

To report and register the movement to the IPv4 mobile agent-a 1805, the IPv4 movement processing portion 1812 transmits the IPv4 movement registration message (Step 2256). Thereafter, the IPv4 movement processing portion 1812 waits for the IPv4 movement registration permission message as the reply of the IPv4 movement registration request message from the IPv4 mobile agent-a 1805 (Step 2257) and after this message is received (Step

2257YES), the flow returns again to the first step 2251. The IPv4 movement processing portion 1812 repeats the processing described above.

Fig. 23 is a flowchart showing an example of the processing of the IPv6 movement processing portion 1815 for detecting whether or not the IPv4/v6 mobile terminal 1806 has moved to another IPv6 network or to the IPv4/v6 network and for executing various processings when this mobile node has moved. Incidentally, this IPv6 movement processing portion 1815 executes the processing in accordance with the procedure of the Mobile IPv6.

The IPv6 movement processing portion 1815 first transmits the message transmission request message for detecting the IPv6 movement, which is the message for requesting the transmission of the IPv6 movement detection message as the message for detecting the movement to another IPv6 network or to the IPv4/v6 network (Step 2361). Incidentally, this IPv6 movement detection message is transmitted by the IPv6 mobile agent either periodically or when it receives the message transmission request message for detecting the IPv6 movement. Next, the IPv6 movement processing portion 1815 judges whether or not the IPv6 movement detection message is received (Step 2362). When this IPv6 movement detection message is received (Step 2362YES), the IPv6 movement processing portion 1815 judges from this message whether or not the mobile node has moved to another network (Step 2362). Incidentally, the network address

3001 includes a foreign IPv6 address 3002 and a home IPv6
address. The IPv6 address of the home IPv6 mobile agent
1807 is set to the home IPv6 address 3002, and the IPv6
address which the IPv4/v6 mobile node 1806 acquires in
5 the visiting network is set to the home IPv6 address
3003. The IPv6 data 3004 includes the IPv6 address 3005
as the IPv6 address of the node itself transmitting this
message and the foreign IPv6 address 3006 as the IPv6
address which the mobile node acquires afresh in the
10 visiting network. When the IPv4/v6 mobile node 1806
returns to the LAN-a 1800 as the home network, the same
address as its own IPv6 address 3005 is set to the
foreign IPv6 address 3006.

Thereafter, the IPv6 movement processing
15 portion 1815 awaits until the IPv6 movement registration
permission message as the reply of the IPv6 movement
registration request message 3000 is received from the
home IPv6 mobile agent 1807 (Step 2367) and after this
message is received (Step 2367YES), the flow returns
20 again to the initial Step 2361. Thereafter, the IPv6
movement processing portion 1815 repeats the processing
described above.

Fig. 24 is a flowchart showing an example of
the processing of the IPv6 movement assistance processing
25 portion 1817 which executes the assistance processing for
the movement of the IPv6 mobile node (not particularly
shown in the drawing) or the IPv4/v6 mobile node 1806
between the networks.

The IPv6 movement assistance processing portion 1817 first judges whether or not the IPv6 movement detection message transmission message is received (Step 2401). When this message is found received as a result of this judgement (Step 2401YES), the IPv6 movement assistance processing portion 1817 transmits the IPv6 movement detection message (Step 2402). The IPv6 movement assistance processing portion 1817 then judges whether or not the IPv6 movement registration request message 3000 is received (Step 2403). If the message is found received as a result of judgement (Step 2403YES), the IPv6 movement assistance processing portion further judges whether or not the request for this movement registration is acceptable (Step 2404). If the request is found unacceptable as a result of judgement (Step 2404NO), the IPv6 movement assistance processing portion 1817 transmits the IPv6 movement registration rejection message as the registration rejection reply message of the IPv6 movement registration request message 3000 to the mobile node.

If the request is acceptable (Step 2404YES), the IPv6 movement assistance processing portion 1817 then compares its own IPv6 address 3005 inside the message with the foreign IPv6 address (Step 2406). If they are found the same as a result of this comparison (Step 2406YES), the IPv6 movement assistance processing portion 1817 judges that the mobile node has returned to the home network, and deletes the corresponding information of the

5 message of the IPv6 movement registration request message
3000 to the mobile node (Step 2411).

15 movement registration request message 3000 by the foreign
IPv6 mobile agent 1809 is effected by the later-appearing
foreign IPv6 movement assistance processing portion 1823
inside the foreign IPv6 mobile agent 1809. When the home
IPv6 mobile agent 1807 receives this IPv4 encapsulated
20 IPv6 movement registration request message 3000, its own
IPv4 processing portion 1818 executes IPv4 decapsulation
and delivers the decapsulated message to the IPv6
movement assistance processing portion 1817. This IPv4
decapsulation by the IPv4 processing portion 1818 is one
25 of the services offered by the existing IPv4.

When the message is not judged as being transferred as a result of the judgement as to IPv4 decapsulation and transfer (Step 2408NO), the IPv6 movement

assistance processing portion 1817 judges that the mobile node has moved to another IPv6 network or to the IPv4/v6 network and sets the information of this mobile node to the mobile node management table 1822. At this time, the value of the foreign IPv6 address 3006 inside the IPv6 movement registration request message 3000, which is received, is set to the foreign IPv6 address 1921 inside the mobile node management table 1822 and "NULL" is set to the foreign IPv6 mobile agent IPv4 address 1922 (Step 2409). The IPv6 movement assistance processing portion 1817 then transmits the IPv6 movement registration permission message to the mobile node (Step 2411).

When the message is found as being IPv4 encapsulated and transferred as a result of the judgement described above (Step 2408YES), the IPv6 movement assistance processing portion 1817 judges that the mobile node has moved to the IPv4 network and sets the information of this mobile node to the mobile node management table 1822. At this time, the value of the foreign IPv6 address 3005 inside the IPv6 movement registration request message 3000, which is transferred, is set to the foreign IPv6 address 1921 inside the mobile node management table 1822, and the value of the home IPv4 address inside the IPv4 header, which is added to the IPv6 movement registration request message 3000 transferred, is set to the foreign IPv6 mobile agent IPv6 address 1922. The IPv6 movement assistance processing portion 1817 then executes IPv4 encapsulation of the IPv6

movement registration permission message as the reply to the mobile node and transfers the message (Step 2412).

The structure of the IPv6 movement registration permission message which is IPv4 encapsulated at this time is the same as the structure 1600 shown in Fig. 16. The foreign IPv6 mobile agent IPv4 address 1922 registered to the mobile node management table 1822 is set to the foreign IPv4 address 1402 inside the IPv4 header 1401, and own IPv4 address of the home IPv6 mobile agent 1807 is set to the home IPv4 address 1403.

The IPv6 movement assistance processing portion 1817 completes the processings as described above and repeats thereafter the processing described above.

Fig. 25 is a flowchart showing an example of the processing of the foreign IPv6 movement assistance processing portion 1823 which executes the movement assistance processing for the IPv4/v6 mobile node 1806 between the networks at the foreign IPv6 mobile agent 1809.

The foreign IPv6 movement assistance processing portion 1823 first judges whether or not the message transmission request message for detecting the IPv6 movement is received (Step 2501). When this message is found received as a result of the judgement (Step 2501YES), the foreign IPv6 movement assistance processing portion 1823 transmits the IPv6 movement detection message (Step 2502). Next, the foreign IPv6 movement assistance processing portion 1823 judges whether or not

the IPv6 movement registration request message 3000 is received (Step 2503). If this message is found received as a result of the judgement (Step 2503YES), the IPv6 movement assistance processing portion 1823 registers tentatively the information of this mobile node to the movement assistance management table 1828 (Step 1804). At this time, the value of own IPv6 address 3005 inside the IPv6 movement registration request message 3000 received is set to the mobile node IPv6 address 2140 of the movement assistance management table 1828, and the value of the home IPv6 mobile agent IPv4 address 2030 corresponding to the foreign IPv6 address 3002 inside the IPv6 movement registration request message 3000 is set to the home IPv6 mobile agent IPv4 address 2141 by looking up the mobile agent address table 1830. Further, "tentative registration" is set to the registration flag. The foreign IPv6 movement assistance processing portion 1823 executes IPv4 encapsulation of the IPv6 registration request message 3000 so received and transfers the encapsulated message to the home IPv6 mobile agent 1807 (Step 2505).

The structure of the IPv4 encapsulated IPv6 movement registration request message at this time is the same as the structure 1400 shown in Fig. 14. The IPv4 address 2141 of the home IPv6 mobile agent 1807 registered to the movement assistance management table 1828 is set to the foreign IPv4 address 1402 in the IPv4 header 1401, and own IPv4 address of the foreign IPv6

mobile agent 1809 is set to the home IPv4 address 1403.

Incidentally, after movement, the IPv4/v6 mobile node 1806 always transmits once the packet to the foreign IPv6 mobile agent 1809 in accordance with the processing procedure of the Mobile IPv6. Therefore, the foreign IPv6 mobile agent 1809 can receive the IPv6 movement registration request-message 3000 address to the home IPv6 mobile agent 1807.

The foreign IPv6 movement assistance processing portion 1823 sets the timer (Step 806) and waits for the IPv6 movement registration permission message 1601 as the reply of the IPv6 movement registration request message 3000 for a predetermined time (Steps 2507 and 2510). Incidentally, the IPv6 movement registration permission message 1601 is encapsulated by IPv4 encapsulation and is transferred by the home IPv6 mobile agent 1807 as described above.

When the IPv6 movement registration permission message 1601 is received within the predetermined time (Step 2507YES), the foreign IPv6 movement assistance processing portion 1823 updates the registration flag 2142 corresponding to the mobile node, which is previously registered tentatively to the movement assistance management table 1828, to "real registration" assistance management table 1828, to "real registration" (Step 2508). Further, the home foreign IPv6 movement assistance processing portion 1823 executes IPv4 decapsulation of the IPv6 movement registration

When the IPv6 movement registration permission message 1601 is not received within the predetermined time (Step

10 and thereafter executes them repeatedly.

15 mobile node or to the IPv4/v6 mobile node 1806, to the foreign IPv6 mobile agent 1809 existing in the network to which the mobile node moves, at the home IPv6 mobile agent 1807.

25 drawing) is received (Step 2601). If this packet is

found received as a result of the judgement, the

transfer-to-IPv6 mobile agent processing portion 1821

```
executes afresh IPv6 encapsulation of this packet (Step
```


2602).

The structure of the IPv6 packet encapsulated by IPv6 encapsulation at this time is the same as the structure 1700 shown in Fig. 17. The corresponding
5 foreign IPv6 address 1921 inside the movement assistance management table 1822 is set to the foreign IPv6 address 1702 inside the IPv6 header 1701 and the IPv6 address of the home IPv6 mobile agent 1807 of its own is set to the home IPv6 address 1703.

10 The transfer-to-foreign IPv6 mobile agent processing portion 1821 judges next whether or not the foreign IPv6 mobile agent IPv4 address 1922 of the corresponding mobile node inside the mobile node management table 1822 is "NULL" (Step 2603). If the
15 foreign IPv6 mobile agent IPv4 address 1922 is found "NULL" as a result of the judgement (Step 2603NO), the transfer-to-foreign IPv6 mobile agent processing portion 1821 judges that the mobile node is moving to the IPv6 network or to the IPv4/v6 network and transmits as such
20 the IPv6 encapsulated IPv6 packet 1700 (Step 2605). Incidentally, the processing procedures for executing IPv6 encapsulation of the IPv6 packet and transmitting the packet follow the procedures of the ordinary Mobile IPv6.

25 If the foreign IPv6 mobile agent IPv4 address 1922 is judged as being other than "NULL" as a result of the judgement (Step 2603YES), the transfer-to-foreign IPv6 mobile agent processing portion 1821 judges that

00000000000000000000000000000000

this mobile node is moving to the IPv4 network, executes further IPv4 encapsulation of the IPv6 packet which has been IPv6 encapsulated already, and transmits it to the foreign IPv6 mobile agent 1809 (Step 2604).

5 Fig. 31 shows the structure of the packet 3100
which is IPv4 encapsulated at this time. As shown in the
drawing, this packet has the structure in which the IPv4
header 1401 is added afresh to the IPv6 encapsulated IPv6
packet 1700 shown in Fig. 17. The value of the corre-
10 sponding foreign IPv6 mobile agent IPv4 address 1922
inside the mobile node management table 1822 is set to
the foreign IPv4 address 1402 inside the IPv4 header 1401
and the value of the IPv4 address of the home IPv6 mobile
agent 1807 of its own is set to the home IPv4 address
15 1403.

The transfer-to-foreign IPv6 mobile agent processing portion 1821 completes the processing and thereafter executes repeatedly the processing described above.

Fig. 27 is a flowchart showing an example of the processing executed by the transfer-to-other node processing portion 1819 when the IPv6 packet, which the IPv4/v6 mobile node 1806 transfers to other IPv6 node on the foreign IPv4 network, is IPv4 encapsulated and transferred from the foreign IPv6 mobile agent 1809, to the foreign IPv6 node, in the home IPv6 mobile agent 1807.

The transfer-to-other node processing portion

5
10
15
20
25

The transfer-to-other node processing portion completes the processing and thereafter executes

management table 1828 is set to the foreign IPv4 address 1402 inside the IPv4 header 1401, while own IPv4 address of the foreign IPv6 mobile agent 1809 itself is set to the foreign IPv4 address 1403.

5 If the registration flag 2142 is not found the
"real registration" as a result of the judgement (Step
2802NO), the transfer-to-home-IPv6 mobile agent process-
ing portion 1827 discards the packet (Step 2804). The
transfer-to-home IPv6 mobile agent processing portion
10 1827 completes the processing and thereafter executes
repeatedly the processing described above.

Fig. 29 is a flowchart showing an example of the processing of the transfer-to-mobile node processing portion 1825 which executes the processing for transferring the packet to IPv4/v6 mobile node 1806 when the IPv6 packet, which is transmitted by other IPv6 mobile node to the IPv4/v6 mobile node 1806 by the home IPv6 mobile agent 1807 in the foreign IPv6 mobile agent 1809, is encapsulated by IPv6 encapsulation, is further encapsulated by IPv4 encapsulation and is transferred.

The transfer-to-mobile node processing portion 1825 first judges whether or not the IPv4 packet addressed to the foreign IPv6 mobile agent 1809 is received (Step 2901). If the packet is found received as a result of this judgement (Step 2901YES), the transfer-to-mobile node processing portion 1825 then judges whether or not the packet so received is the one encapsulated by IPv4 encapsulation and transferred by the

home IPv6 mobile agent 1807 (Step 2902). Incidentally,
the transfer of the IPv6 packet by this home IPv6 mobile
agent 1807 is executed by the foreign IPv6 mobile agent
processing portion 1821 described above. If the packet
5 is not found as the transferred IPv6 packet as a result
of the judgement (Step 2902NO), the transfer-to-mobile
node processing portion 1825 discards this packet (Step
2905). If it is found as the transferred packet (Step
2902YES), the transfer-to-mobile node processing portion
10 1825 further judges whether or not the foreign node of
this IPv6 packet is the mobile node really registered to
the movement assistance management table 1828 (Step
2903). The IPv6 address of the foreign node is the
address of the foreign node contained in the IPv6 packet
15 1704. If it not found really registered as a result of
the judgement (Step 2903NO), the transfer-to-mobile node
processing portion 1825 discards this packet (Step 2905).
If it is really registered (Step 2903YES), the transfer-
to-mobile node processing portion 1825 decapsulates this
20 packet by IPv4 decapsulation and then transfers it to the
IPv4/v6 mobile node 1806 (Step 2904).

The transfer-to-mobile node processing portion
1825 completes the processing and thereafter executes
repeatedly the processing described above.

25 The flow of the processings from Figs. 22 to 29
described above will be explained hereby with reference
to the network system shown in Fig. 18. When the IPv4/v6
mobile node 1806 exists on the LAN-a 1800 as the home

5 Therefore, it is not judged as moving.

To this IPv6 movement registration request message 3000 are set "11::1" (home Ipv6 mobile agent 1807) as the foreign IPv6 address 3002, "21::30" (assumed as the IPv6 address used afresh on LAN-b 1801 by the IPv4/v6 mobile node 1806 in this embodiment) as the home IPv6 address 3003, "11::30" (IPv4/v6 mobile node 1806) as its own IPv6 address 3005, and "21::30" as the foreign IPv6 address 3006.

25 In this embodiment, the IPv6 packet cannot come out from the LAN-b 1801 beyond the router as described above, but can transmit and receive the IPv6 packet inside the LAN-b 1801. Therefore, the IPv4/v6 mobile

node 1806 can receive the IPv6 movement detection message transmitted by the foreign IPv6 mobile agent 1809, and can also transmit the IPv6 movement registration request message 3000 to the LAN-b 1801.

5 The IPv6 movement registration request message 3000 is once received by the foreign IPv6 mobile agent 1809. The foreign IPv6 mobile agent 1809 adds the IPv4 header 1401, in which "10.0.0.1" (home IPv6 mobile agent 1807) is set as the foreign IPv4 address 1402 and
10 "20.0.0.1" (foreign IPv6 mobile agent 1809) is set as the home IPv4 address 1403, to the message by its foreign IPv6 movement assistance processing portion 1823, and transfers the message to the home IPv6 mobile agent 1807. Thereafter, this message is received by the home IPv6
15 mobile agent 1807. After receiving this message, the home IPv6 mobile agent 1807 adds the IPv4 header 1401, in which "20.0.0.1" (foreign IPv6 mobile agent 1809) is set as the foreign IPv4 address 1402 and "10.0.0.1" (home IPv6 mobile agent 1807) is set as the foreign IPv4
20 address 1403, to the IPv6 movement registration permission message 1601 by its IPv6 movement assistance processing portion 1817, and transmits this message to the home IPv6 mobile agent 1809. Receiving this message, the foreign IPv6 mobile agent 1809 decapsulates this
25 message by IPv4 decapsulation by the foreign IPv6 movement assistance processing portion 1823 and transmits decapsulated message to the IPv4/v6 mobile node 1806.

In consequence, registration of the movement of

the IPv4/v6 mobile node 1806 to the home IPv6 mobile agent 1807 is completed. At this time are set "11::30" to the mobile node IPv6 address 20, "21::30" to the foreign IPv6 address 1921, and "20.0.0.1" to the foreign IPv6 mobile agent IPv6 address 2140 of the mobile node management table 1822, as the information of the IPv4/v6 mobile node 1806. Similarly, "11::30" is set to the mobile node IPv6 address 2140 and "10.0.0.1", to the home IPv6 mobile agent IPv4 address 2141 of the movement assistance management table 1828.

When the home IPv6 mobile agent 1807 receives the IPv6 packet transmitted by the IPv6 node 1804 to the IPv4/v6 mobile node 1806, it adds the IPv6 header 1701, in which "21::30" is set to the foreign IPv6 address 1702 and "11::1" is set to the home IPv6 address 1703, to this IPv6 packet by its transfer-to-foreign mobile agent processing portion 1821, and further adds the IPv4 header 1401, in which "20.0.0.1" is set to the foreign IPv4 address 1402 and "10.0.0.1" is set to the home IPv4 address 1403, and transfers the packet to the foreign IPv6 mobile agent 1809. The packet 3100 is received by the home IPv6 mobile agent 1809. This mobile agent 1809 decapsulates this packet by IPv4 decapsulation by its transfer-to-mobile node processing portion 1825 and transmits it to the IPv4/v6 mobile node 1806. The IPv4/v6 mobile node 1806 receives and processes this packet as the IPv6 packet in accordance with the ordinary Mobile IPv6 procedure.

When the home IPv6 mobile agent 1809 receives the IPv6 packet transmitted by the IPv4/v6 mobile node 1806 to the IPv6 node 1804, on the contrary, it adds the IPv4 header 1401, in which "10.0.0.1" (home IPv6 mobile agent 1807) is set to the home IPv4 address 1402 and "20.0.0.1" (foreign IPv6 mobile agent 1809) is set to the home IPv4 address 1403, to this packet by the transfer-to-home IPv6 mobile agent processing portion 1827 and transmits the packet to the home IPv6 mobile agent 1807.

10 This IPv4 encapsulated packet 1500 is received by the home IPv6 mobile agent 1807. The home IPv6 mobile agent 1807 decapsulates this packet by IPv4 decapsulation by its transfer-to-other node processing portion 1819 and transmits the packet to the foreign IPv6 node 1804. The

15 foreign IPv6 node 1804 receives and processes this packet as the ordinary IPv6 packet.

In the present invention, even when the IPv4/v6 mobile node 1806 moves from the LAN-a 1800 as the IPv4/v6 network to the LAN-b 1801 as the IPv4 network, the

20 IPv4/v6 mobile node 1806 can receive the IPv6 packet transmitted from the IPv4/v6 mobile node 1804 to the IPv4/v6 mobile node 1806 as described above. On the contrary, the existing IPv6 node 1804 can receive the IPv6 packet transmitted by the IPv4/v6 mobile node 1806

25 to the IPv6 node 1804.

Further, communication making use of the IPv4 between other nodes and the IPv4/v6 mobile node 1806 can be made by means of the movement assistance by the IPv4

mobile agent-a 1805 supporting the Mobile IPv4 as the existing method and the movement assistance on the IPv4 by the IPv4 mobile agent-b 1808.

Incidentally, when the IPv4/v6 mobile node 1806
5 returns from the LAN-b 1801 to the LAN-a 1800, the
IPv4/v6 mobile node 1806 detects this return to the home
network by the IPv6 movement processing portion 1815
described above. Then, the IPv4/v6 mobile node 1806
transmits the IPv6 movement registration request message
10 3000 in which "11::30" is set to its own IPv6 address
3005 and "11::30" which is the same as its own IPv6
address 3005 is set to the home IPv6 address 3006, to the
home IPv6 mobile agent 1807. Receiving this IPv6 move-
ment registration request message 3000, the home IPv6
15 mobile agent 1807 judges that the IPv4/v6 mobile node has
returned to the LAN-a 1800 as the home network because
its own IPv6 address 3005 inside this message is the same
as the foreign IPv6 address 3006, and then deletes the
information about this mobile node inside the mobile node
20 management table 1822. In consequence, the IPv4/v6
mobile node 1806 can execute communication utilizing the
ordinary IPv6. Similarly, since the IPv4/v6 mobile node
1806 reports its return to the LAN-a 1800 to the IPv4
mobile agent-a 1805 in accordance with the processing
25 procedure of the Mobile IPv4 by the IPv4 movement
registration request message. Communication utilizing
the ordinary IPv4 can be made, too.

In the embodiment described above, the movement

of the mobile node between the networks is detected by utilizing the IPv4 movement detection message and the IPv4 detection message, but it is also possible to employ the system construction in which the user of the mobile
5 node indicates by himself to the IPv4 movement processing portion 1813 and to the IPv6 movement processing portion and reports the movement to the IPv4 mobile agent and to the IPv6 mobile agent.

Next, the explanation will be given on the case
10 where the IPv4/v6 mobile node moves from the IPv4/v6 network to the IPv6 network.

A structural example of the network system to which the present invention is applied and a structural example of the mobile agent will be described with
15 reference to Fig. 32.

As shown in this drawing, the network system according to this embodiment includes a LAN-c 3200, a LAN-d 3201 and a WAN 1902 connecting the LAN-c 3200 and the LAN-d 3201 by a public line or an exclusive line. On
20 the LAN-c 3200 exist an IPv4 node 3203 executing communication by utilizing only the IPv4, an IPv6 node 3204 executing communication by utilizing only the IPv6, an IPv4/v6 mobile node 1806 executing communication by utilizing both IPv4 and IPv6 and moving between the
25 networks, a home IPv4 mobile agent-c 3206 executing communication by utilizing both IPv4 and IPv6 and assisting the movement of the node, which executes communication by utilizing the IPv4, between the

networks, and an IPv6 mobile agent-c 3207 assisting the movement of the node, which executes communication by utilizing the IPv6 in accordance with the Mobile IPv6 procedure, between the networks. On the LAN-d 3201 exist
5 a foreign IPv4 mobile agent 3208 which executes communication by utilizing the IPv4 and IPv6 and assists the movement of the node executing communication by utilizing the IPv4 when this node moves to the LAN-d 3201, and an IPv6 mobile agent-d 3209. Here, the IPv4/v6 mobile node
10 1806 is the same as the one shown in Fig. 18.

Incidentally, the IPv6 mobile agent-c 3207 functions also as a router handling both of the IPv4 packet and the IPv6 packet and connects the LAN-c 3200 and the WAN 3202. The IPv6 mobile agent-d 3209 functions
15 also as a router handling only the IPv6 packet and connects the LAN-d 3201 and the WAN 3202. Therefore, both of the IPv4 packet and the IPv6 packet can go out to the external networks beyond the routers, whereas only the IPv6 packet can go out from the LAN-d 3201.
20 Incidentally, transmission/reception itself of the IPv4 packet and the IPv6 packet inside the LAN-c 3200 and the LAN-d 3201 is possible.

In this embodiment, the IP addresses are tabulated below.

25	IPv4 address	IPv6 address
IPv4 node 3203	"10.0.0.10"	
IPv6 node 3204		"11::20"
IPv4/v6 mobile node 1806	"10.0.0.30"	"11::30"

home IPv4 mobile agent 3206 "10.0.0.1" "11::1"

home IPv4 mobile agent 3208 "20.0.0.1" "21::1"

The home mobile agent 3206 includes an IPv4 movement assistance portion 3216 which executes communication by utilizing the IPv4 and assists the movement of an IPv4 mobile node (not particularly shown in the drawing) moving between the networks or an IPv4/v6 mobile node 1806, a mobile node management table 3217 which manages the information of the mobile node that has moved to another IPv4 network or to the IPv4/v6 network, an IPv4 processing portion 3218 which executes processing in accordance with the services offered by the IPv4, a transfer-to-foreign IPv4 mobile agent processing portion 3219 which executes a processing for transferring the IPv4 packet, which is transmitted by other IPv4 node to the IPv4/v6 mobile node 1806, to a foreign IPv4 mobile agent 3208, an IPv6 processing portion 3220 which executes processing in accordance with the services offered by the IPv6, a transfer-to-other node processing portion 3221 which executes a processing for transferring the IPv4 packet, which is transferred from the foreign IPv4 mobile agent 3208 and is transferred to the IPv4/v6 mobile node 1806, to the foreign IPv4 node, and a communication processing portion 3215 which executes transmission/reception control, etc. of the packet to and from the LAN.

The foreign IPv4 mobile agent 3206 comprises a foreign IPv4 movement assistance processing portion 3223

000000-09000000

which assists the movement of the IPv4/v6 mobile node 1806 when this node 1806 moves to the network (LAN-d 3201) to which the foreign IPv4 mobile agent 3208 belongs, a movement assistance management table 3229

5 which manages the information of the mobile node, a mobile agent address table 3228 which registers the address information of the home IPv4 mobile agent 3206, an IPv4 processing portion 3224 which executes a processing in accordance with the services offered by the IPv4,

10 a transfer-to-mobile agent processing portion 3225 which executes a processing for transferring the IPv4 packet, which is transmitted from the IPv4/v6 mobile node 1806 to other IPv4 node, to the home IPv4 mobile agent 3206, an IPv6 processing portion 3226 which executes a processing

15 in accordance with the services offered by the IPv6, a transfer-to-mobile node processing portion 3227 which executes a processing for transferring the packet, which is transferred from the home IPv4 mobile agent 3206 to the IPv4/v6 mobile node 1806, to the IPv4/v6 mobile node

20 1806, and a communication processing portion 3222 which executes transmission/reception control, etc. of the packet to the LAN.

Here, among the constituent elements of the home IPv4 mobile agent 3206 described above, it is the

25 IPv4 movement assistance processing portion 3216, the mobile node management table 3217, the transfer-to-foreign IPv4 mobile agent processing portion 3219 and the transfer-to-other node processing portion 3221 that

constitute a characterizing part of the present invention. Among the constituent elements of the foreign IPv4 mobile agent 3208, the constituent elements according to the present invention are the foreign IPv4

5 movement assistance portion 3223, the mobile agent address table 3228, the movement assistance management table 3229, the transfer-to-home IPv4 mobile agent processing portion 3225 and the transfer-to-mobile node processing portion 3227.

10 Fig. 33 shows an example of the mobile node management table 3217 described above. As shown in the drawing, the mobile node management table 3217 includes a mobile node IPv4 address 3300 as the IPv4 address of the mobile node, a foreign IPv4 address 3301 representing the
15 foreign IPv4 address when the home IPv4 mobile agent 3206 transfers the IPv4 packet address to the mobile node when this mobile node is moving to another IPv4 network or to the IPv4/v6 network, and a foreign IPv4 mobile agent IPv6 address 3302 representing the IPv6 address of the foreign
20 IPv4 mobile agent. Here, "NULL" is set to the foreign IPv4 mobile agent IPv6 address 3302 when the mobile node is moving to the IPv4 network or to the IPv4/v6 network, and the IPv6 address of the foreign IPv4 mobile agent 3208 existing inside the IPv6 network is set when the
25 mobile node is moving to this IPv6 network.

Incidentally, though this drawing illustrates the case where entries for a plurality of moving nodes exist, the entry of the mobile node does not exist under the initial

state. The updating processing of this table will be later described.

Fig. 34 shows an example of the mobile agent address table 3228 described above. As shown in this drawing, the mobile agent address table 3228 comprises the IPv6 addresses of all the home IPv4 mobile agents existing in the network system (though only the home IPv4 mobile agent 3206 on the LAN-c 3200 is shown in this embodiment), the home IPv4 mobile agent IPv6 address 3400 as the IPv4 address and the home IPv4 mobile agent IPv4 address 3401. This table is set by a manager, etc.

Fig. 35 shows an example of the movement assistance management table 3229 described above. As shown in this drawing, the movement assistance management table 3229 includes a mobile node IPv4 address 3500 as the IPv4 address of the IPv4/v6 mobile node 1806, a home IPv4 mobile agent IPv6 address 3501 as the IPv6 address of the home IPv4 mobile agent 3206 existing inside the home network of the mobile node, and a registration flag 3502 representing whether the entry is "tentative registration" or "real registration". Though this drawing illustrates the case where entries for a plurality of mobile nodes exist, the entry for the mobile node does not exist in this table under the initial state. The updating processing of this table will be described later.

In the construction described above, the processing operations of the IPv4/v6 mobile node 1806,

5 as the IPv6 network, will be explained in detail.

10 drawing) or the IPv4/v6 mobile node 1806, between the
networks.

15 received (Step 3601). When this message is found
received as a result of this judgement (Step 3601YES),
the IPv4 movement assistance processing portion 3216
transmits the IPv4 movement detection message (Step
3602). Next, the IPv4 movement assistance processing
20 portion 3216 judges whether or not the IPv4 movement
registration request message is received (Step 3603).

Here, Fig. 42 shows the structure of this IPv4 movement registration request message 4200. As shown in the drawing, the IPv4 movement registration request message 4200 includes an IPv4 header 1401 and an IPv4 data 4201. The IPv4 header 1401 includes a foreign IPv4 address 1402 and a home IPv4 address 1403, and the IPv4 address of the home IPv4 mobile agent 3206 is set to the foreign IPv4

address 1402 while the IPv4 address of the IPv4/v6 mobile node 1806 is set to the home IPv4 address 1403. The IPv4 data 4201 includes the IPv4 address 4202 as own IPv4 address of the node transmitting this message and the
5 foreign IPv4 address 4203 as the foreign address when the IPv4 packet address to this mobile agent is transferred. The same address as the IPv4 address 4202 is set to the foreign IPv4 address 4203 when the IPv4/v6 mobile node 1806 returns to the LAN-c 3200 as the home network.
10 Incidentally, this message is transmitted by the IPv4 movement processing portion 1813 inside the IPv4/v6 mobile node 1806 explained already with reference to Fig. 22.

When the IPv4 movement registration request
15 message 4200 is found received as a result of judgement (Step 3603YES), the IPv4 movement assistance processing portion 3216 further judges whether or not this movement registration request is acceptable (Step 3604). When it found unacceptable as a result of this judgement (Step
20 3604NO), the IPv4 movement assistance processing portion 3216 transmits an IPv4 movement registration rejection message as a rejection reply message to the IPv4 movement registration request message 4200 to the mobile node (Step 3605). If it is found acceptable (Step 3604YES),
25 the IPv4 movement assistance processing 3600 then compares its own address 4202 inside the message with the foreign IPv4 address 4203 (Step 3606).

If own IPv4 address 4202 and the foreign IPv4

00000000-09000000

If own IPv4 address 4202 and the foreign IPv4 address 4203 are found different as a result of the judgement (Step 3609NO), the IPv4 movement assistance processing portion 3216 further judges whether or not the IPv4 movement registration request message 4200 received is the message which is encapsulated by IPv6 encapsulation and transmitted by the foreign IPv4 mobile agent 3208 (Step 3608). Incidentally, this IPv6 encapsulation of the IPv4 movement registration request message 4200 by the foreign IPv4 mobile agent 3208 is executed by the foreign IPv4 movement assistance processing portion 3223 inside the later-appearing IPv4 mobile agent 3208.

Receiving this IPv4 movement registration request message
25 4200 which is IPv6 encapsulated in this way, the home
IPv4 mobile agent 3206 decapsulates the message by IPv6
decapsulation by its IPv6 processing portion 3220 and
delivers the message to the IPv4 movement assistance

processing portion 3216. IPv6 decapsulation by this IPv6 processing portion is one of the services offered by the existing IPv6.

If the result of the judgement represents that the message is not IPv6 encapsulated and is not transferred (Step 3608NO), the IPv4 movement assistance processing portion 3216 judges that the mobile node has moved to another IPv4 network or to the IPv4/v6 network and sets the information of this mobile node to the mobile node management table 3217 (Step 3609). At this time, the value of the foreign IPv4 address 4203 inside the received IPv4 movement registration request message 4200 is set to the foreign IPv4 address 3301 inside the mobile node management table 3217 and "NULL" is set to the foreign IPv4 mobile agent IPv6 address 3302. Then, the IPv4 movement assistance processing portion 3216 transmits the IPv4 movement registration permission message to the mobile node (Step 3611).

20 If the message is found the one that is IPv6
encapsulated and is transferred as a result of the
judgement (Step 3608YES), the IPv4 movement assistance
processing portion 3216 judges that the mobile node has
moved to the IPv6 network and sets the information of
this mobile node to the mobile node management table 3217
25 (Step 3610). At this time, the value of the foreign IPv4
address 4203 inside the transferred IPv4 movement
registration request message 3300 is set to the foreign
IPv4 address 3301 inside the mobile node management table

portion 3223 first judges whether or not the message transmission request message for detecting the IPv4 movement is judged (Step 3701). If this message is found received as a result of this judgement (Step 3701YES), the foreign IPv4 movement assistance processing portion 3223 transmits the IPv4 movement detection message (Step 3702). Next, the foreign IPv4 movement assistance processing portion 3223 judges whether or not the IPv4 movement registration request message 4200 is received (Step 3703). If this message is found received as a result of the judgement (Step 3703YES), the foreign IPv4 movement assistance processing portion 3223 tentatively registers the information of this mobile node to the movement assistance management table 3229 (Step 3704). At this time, the value of own IPv4 address 4202 inside the received IPv4 movement registration request message 4200 is set to the foreign IPv4 address 3500 inside the mobile node management table 3229 and the value of the home IPv4 mobile agent IPv6 address 3400, that corresponds to the foreign IPv4 address 1402 inside the IPv4 movement registration request message 4200, is set to the home IPv4 mobile agent IPv6 address 3501 by looking up the mobile agent address table 3228. Further, "tentative registration" is set to the registration flag 3502. The foreign IPv4 movement assistance processing portion 3223 encapsulates by IPv6 encapsulation the IPv4 movement registration request message 4200 so received, and transfers the message to the home IPv4 mobile agent

3206 (Step 3705).

The structure of the IPv6 encapsulated IPv4 movement registration request message 4200 at this time is shown in Fig. 44. As shown in this drawing, the message 4400 has the construction in which the IPv6 header 1701 is added to the IPv4 movement registration permission message 4200 shown in Fig. 42. The home IPv4 mobile agent IPv6 address 3501 registered to the movement assistance management table 3229 is set to the foreign IPv6 address 1702 inside the IPv6 header 1701, and own IPv6 address of the foreign IPv4 mobile agent 3208 is set to the home IPv6 address 1703.

Incidentally, the IPv4/v6 mobile node 1806 always transmits after its movement the packet to the foreign IPv4 mobile agent 3208 in accordance with the processing procedure of the Mobile IPv4. Therefore, the foreign IPv4 mobile agent 3208 can receive the IPv4 movement registration request message 4200.

The foreign IPv4 movement assistance processing portion 3223 sets the timer (Step 3706) and waits for the IPv4 movement registration permission message 4301 as the reply to the IPv4 movement registration request message 4200 for a predetermined time (Steps 3707 and 3710). By the way, this IPv4 movement registration permission message 4301 is encapsulated to the IPv6 encapsulated message and is transmitted by the home IPv4 mobile agent 3206 as described above.

If the IPv4 movement registration permission


```

20  repeats the processing described above.

```

Fig. 38 is a flowchart showing an example of the processing of the transfer-to-foreign IPv4 mobile agent processing portion 3219 which executes the processing for transferring the IPv4 packet transmitted by other IPv4 node to the IPv4 mobile node (not particularly shown in the drawing) or to the IPv4/v6 mobile agent 1806 to the foreign IPv4 mobile agent 3208 existing in the foreign network of the mobile node, in the home IPv4

The transfer-to-foreign IPv4 mobile agent

25 3302 is found to be other than "NULL" as a result of the judgement (Step 3802YES), the transfer-to-foreign IPv4 mobile agent processing portion 3219 judges that the mobile node is moving to the IPv6 network, encapsulates

If the foreign IPv4 mobile agent IPv6 address 3302 is found to be other than "NULL" as a result of the judgement (Step 3802YES), the transfer-to-foreign IPv4 mobile agent processing portion 3219 judges that the mobile node is moving to the IPv6 network, encapsulates

the received IPv4 packet by IPv6 encapsulation and transmits the encapsulated packet to the foreign IPv4 mobile agent 3208 (Step 3803).

The structure of the IPv6 encapsulated IPv4 packet at this time is shown in Fig. 45. This packet has the construction in which the IPv6 header 1701 is added afresh to the IPv4 packet 4501. The value of the foreign IPv4 mobile agent IPv6 address 3302 inside the mobile node management table 3217 is set to the foreign IPv6 address 1702 inside the IPv6 header 1701, and own IPv6 address of the home IPv4 mobile agent 3206 is set to the home IPv6 address 1703.

The transfer-to-foreign IPv4 mobile agent processing portion 3219 completes the processing and thereafter executes repeatedly the processing described above.

Fig. 39 is a flowchart showing an example of the processing of the transfer-to-other node processing portion 3221 which executes the processing for transferring the packet to the IPv4 node when the IPv4 packet transmitted by the IPv4/v6 mobile node 1806 to other IPv4 node on the foreign IPv6 network is encapsulated by IPv6 encapsulation and transferred by the foreign IPv4 mobile agent 3208, in the home IPv4 mobile agent 3206.

The transfer-to-other node processing portion 3221 first judges whether or not the IPv6 packet address to the home IPv4 mobile agent 3208 itself is received (Step 3901). If the packet is found received as a result

20

25

the processing of the transfer-to-home IPv4 mobile agent

processing portion 3225 which executes the processing for transferring the IPv4 packet, which the IPv4/v6 mobile node 1806 transmits to other IPv4 nodes, to the home IPv4 mobile agent 3206 in the foreign IPv4 mobile agent 3208.

5 The transfer-to-home IPv4 mobile agent processing portion 3225 first judges whether or not the IPv4 packet, which is registered to the movement assistance management table 3229 and is transmitted by the IPv4/v6 mobile agent 1806, is received (Step 4001).

10 If the corresponding packet is found received as a result of this judgement (Step 4001YES), the transfer-to-home IPv4 mobile agent processing portion 3225 then judges whether or not the registration flag 3502 of the corresponding mobile node inside the mobile node management

15 table 3229 is "real registration" (Step 4002). If the registration flag is found the "real registration" as a result of the judgement (Step 4002YES), the transfer-to-home IPv4 mobile agent processing portion 3225 encapsulates the received IPv4 packet by IPv6 encapsulation and transmits it to the home IPv4 mobile agent 3206

20 (Step 4003).

The IPv4 packet subjected to IPv6 encapsulation at this time has the same structure as the structure shown already in Fig. 45. The value of the corresponding home IPv4 mobile agent IPv6 address 3501 inside the movement assistance management table 3229 is set to the foreign IPv6 address inside the IPv6 header 1701 and the IPv6 address of the foreign IPv4 mobile agent 3208 itself

If the registration flag 3502 is not found the "real registration" as a result of the judgement (Step 4002NO), the transfer-to-home IPv4 mobile agent processing portion 3225 discards this packet (Step 4004). The transfer-to-home IPv4 mobile agent processing portion 3225 completes the processing and thereafter repeats the processing described above.

10 the processing of the transfer-to-other mobile node
processing portion 3227 which executes the processing for
transferring the packet to the IPv4/v6 mobile node 1806
when the IPv4 packet transmitted by other IPv4 node to
the IPv4/v6 mobile node 1806 by the home IPv4 mobile
15 agent 3206 is encapsulated by IPv6 encapsulation and is
transferred, in the foreign IPv4 mobile agent 3208.

3227 first judges whether or not the IPv6 packet
addressed to the foreign IPv4 mobile agent 3208 itself is
20 received (Step 4101). If it is found received as a
result of this judgement (Step 4101YES), the transfer-to-
mobile node processing portion 3227 then judges whether
or not the received packet is the IPv4 packet which is
IPv6 encapsulated and transferred by the home IPv4 mobile
25 agent 3206 (Step 4102). Incidentally, this transfer of
the IPv4 packet by the home IPv4 mobile agent 3206 is
executed by the home IPv4 movement assistance processing
portion 3219 described above. If the packet is not the

transferred IPv4 packet as a result of the judgement
(Step 4102NO), the transfer-to-mobile node processing
portion 3227 discards this packet (Step 4105). If it is
the transferred IPv4 packet (Step 4102YES), the transfer-
5 to-mobile node processing portion 3227 further judges
whether or not the node of this IPv4 packet is the mobile
node registered really to the movement assistance manage-
ment table 3229 (Step 4103). If the node is not found
registered really (Step 4103NO) as a result of this
10 judgement, the transfer-to-mobile node processing portion
3227 discards the packet (Step 4105). If it is found
registered really (Step 4103YES), the transfer-to-mobile
node processing portion 3227 decapsulates this packet by
IPv6 decapsulation and transfers the packet to the
15 IPv4/v6 mobile agent 1806 (Step 4104).

The transfer-to-other node processing is
completed and thereafter the processing described above
is repeatedly executed.

The flow of the processings shown in Fig. 22
20 and in Figs. 36 to 41 will be explained with reference to
the network system shown in Fig. 32. When the IPv4/v6
mobile node 1806 exists on the LAN-c 3200 as the home
network, the IPv4/v6 mobile node 1806 is judged as not
moving because it receives the IPv4 movement detection
25 message and the IPv6 movement detection message trans-
mitted by the home IPv4 mobile agent 3206 and the IPv6
mobile agent-c 3207, respectively.

When the IPv4/v6 mobile node 1806 has moved to

the LAN-d 3201, the IPv4/v6 mobile node 1806 is judged as having moved to another network because it receives the IPv4 movement detection message and the IPv6 movement detection message transmitted by the foreign IPv4 mobile agent 3208 and the IPv6 mobile agent-d 3209, respectively. Then, the IPv4/v6 mobile node transmits the IPv4 movement registration request message 4200 and the IPv6 movement registration request message 3000 by means of the IPv4 movement processing portion 1813 and the IPv6 movement processing portion 1815 to the home IPv4 mobile agent 3206 and to the IPv6 mobile agent-c 3207, respectively.

To this IPv4 movement registration request message 4200 are set "10.0.0.1" (home IPv4 mobile agent 3206) as the foreign IPv4 address 1402, "10.0.0.30" as its own IPv4 address 3202 and "20.0.0.30" (as the foreign IPv4 address which the IPv4/v6 mobile node 1806 acquires from the foreign IPv4 mobile agent 3208 in the foreign LAN-d 3201 in this embodiment), as the transfer IPv4 address.

In this embodiment, the IPv4 packet cannot come out from the LAN-d 3201 beyond the router to the external network as described above but can transmit/receive the IPv4 packet inside the LAN-d 3201. Therefore, the IPv4/v6 mobile node 1806 can receive the IPv4 movement detection message transmitted by the foreign IPv4 mobile agent 3208 and can also transmit the IPv4 movement registration request message 4200 to the LAN-d 3201.

This IPv4 movement registration request message 4200 is once received by the foreign IPv4 mobile agent 3208. The foreign IPv4 mobile agent 3208 adds the IPv6 header 1701, in which "11::1" (home IPv4 mobile agent 5 3206) is set as the foreign IPv6 address 1702 and "21::1" (foreign IPv4 mobile agent 3208) is set as the home IPv6 address 1703, to this message 4200 by means of its foreign IPv4 movement assistance processing portion 3223, and transfers the message to the home IPv4 mobile agent 10 3206. Thereafter, this message is received by the home IPv4 mobile agent 3206. After receiving this message, the home IPv4 mobile agent 3206 adds the IPv6 header 1701, in which "21::1" (foreign IPv4 mobile agent 3206) is set as the foreign IPv6 address 1702) and "11::1" 15 (home IPv4 mobile agent 3208) is set as the home IPv6 address 1703, to the IPv4 movement registration permission message 4301 by means of its IPv4 movement assistance processing portion 3216, and transfers the message to the foreign IPv4 mobile agent 3208. Receiving 20 this message, the foreign IPv4 mobile agent 3208 decapsulates the message by IPv6 decapsulation by its foreign IPv4 movement assistance processing portion 3223 and transmits the message to the IPv4/v6 mobile node 1806.

25 In this way, registration of the movement of the IPv4/v6 mobile node 1806 to the home IPv4 mobile agent 3206 is completed. At this time, "10.0.0.30" is set as the information of the IPv4/v6 mobile node 1806 to

00000000000000000000000000000000

5

10

25

agent 3206) is set to the foreign IPv6 address 1702 and "21::1" (foreign IPv4 mobile agent 3208) is set to the home IPv6 address 1703, to the packet by means of the transfer-to-home IPv4 mobile agent processing portion
5 3205 and transmits the packet to the home IPv4 mobile agent 3206. The IPv6 encapsulated packet is received by the home IPv4 mobile agent 3206. The home IPv4 mobile agent 3206 decapsulates this packet by IPv6 decapsulation by its transfer-to-other node processing portion 3221 and
10 then transmits it to the foreign IPv4 node 3203. The IPv4 node 3203 receives and processes this packet as the ordinary IPv4 packet.

According to the present invention described above, even when the IPv4/v6 mobile node 1806 moves from
15 the LAN-c 3200 as the IPv4/v6 network to the LAN-d 3201 as the IPv6 network, the IPv4/v6 mobile node 1806 can receive the IPv4 packet transmitted by the IPv4 node 3203 to the IPv4/v6 mobile node 1806. On the contrary, the existing IPv4 node 3203 can receive the IPv4 packet
20 transmitted by the IPv4/v6 mobile node 1806 to the IPv4 node 3203.

Communication by making use of the IPv6 between other node and the IPv4/v6 mobile node 1806 can be made by the assistance of movement by the IPv6 mobile agent-c
25 3207 supporting the IPv6 and by the assistance of movement of the node in the IPv6 by the IPv6 mobile agent-d 3209.

Incidentally, when the IPv4/v6 mobile node 1806

returns from the LAN-d 3201 to the LAN-c 3200, the IPv4/v6 mobile node 1806 detects its return to the home network by the IPv4 movement processing 1813 described already. Then, the IPv4/v6 mobile node 1806 transmits
5 the IPv4 movement registration request message, in which "10.0.0.30" is set to its own address 4202 and "10.0.0.30" having the same address as its own IPv4 address 4202 to the foreign IPv4 address 4203, to the home IPv4 mobile agent 3206. Receiving this IPv4 move-
10 ment registration request message 4200, the home IPv4 mobile agent 3206 judges that the IPv4/v6 mobile node 1806 has returned to the LAN-c 3200 as the home network because its own IPv4 address 4202 in the message has the same address as that of the foreign IPv4 address 4203,
15 and then deletes the information of this mobile node in the mobile node management table 3217. As a result, the IPv4/v6 mobile node 1806 can make communication by utilizing the ordinary IPv4. Similarly, the IPv4/v6 mobile node 1806 reports the return to the LAN-c 3200 by
20 the IPv6 movement registration request message 3000 to the IPv6 mobile agent-c 3207, too, in accordance with the processing procedure of the Mobile IPv6. Therefore, communication utilizing the ordinary IPv6 can be made, as well.

1. A mobile node moving between IP (Internet Protocol) networks, comprising:

IPv6 (Internet Protocol version 6) processing means for executing services in accordance with said IPv6;

movement registration processing means for adding an IPv4 header (an IP header used for said IPv4), in which an IPv4 address of a mobile agent is set as a foreign address and an IPv4 address of said mobile node usable in a foreign IPv4 network is set as a home address, to a message used for said IPv6 so as to register the movement of said mobile node to said mobile agent connected to an IPv4/v6 network (a network capable of executing communication by utilizing both of said IPv4 and said IPv6) for assisting the movement of said mobile node when said mobile node moves from said IPv4/v6 network to an IPv4 network (a network capable of executing communication by utilizing only said IPv4), and transmitting said message.

2. A mobile node moving between networks,
comprising:

packet transmission processing means for generating an IPv4 encapsulated IPv6 packet by adding an IPv4 header, in which an IPv4 address of a mobile agent on an IPv4/v6 network is set as a foreign address and an IPv4 address of said mobile node usable for a foreign IPv4 network is set as a home address, to an IPv6 packet (a packet used for said IPv6) transmitted from said mobile node to other nodes when said mobile node moves from said IPv4/v6 network to said IPv4 network, and transmitting said IPv4 encapsulated IPv6 packet.

communication processing means for executing

5. A mobile agent for assisting the movement of a node executing communication by utilizing an IPv6 (Internet Protocol version 6), comprising:

IPv6 processing means for executing services in accordance with said IPv6;

communication processing means for executing transmission/reception control of packets to and from networks; and

transfer-to-other node processing means for removing an IPv4 header when receiving an IPv4 encapsulated IPv6 packet transmitted by a mobile node, and transmitting again said IPv6 packet so taken out to said network.

6. A mobile agent for assisting the movement of a node executing communication by utilizing an IPv6 (Internet Protocol version 6), comprising:

IPv4 (Internet Protocol version 4) processing means for executing services in accordance with said

adding a first kind of IP header in which an IP address, in accordance with said first kind of IP, of a second mobile agent belonging to said second IP network is set as a foreign address by a first mobile agent belonging to said first IP network and an IP address, in accordance with said first kind of IP, of said first mobile agent is set as a home address, to an IP packet in accordance with said second kind of IP, transmitted from said other nodes to said mobile node, and transmitting said IP packet to said second mobile agent; and

9. A method of controlling a mobile node by a mobile agent in a network system in which a first IP (Internet Protocol) network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing communication in accordance with only said first kind of IP, so that said mobile node capable of executing communication in accordance with said second kind of IP

adding a second kind of an IP header, in which an IP address, in accordance with said second kind of IP, of said mobile node relating to said second IP network is set as a foreign address by a first mobile agent belonging to said first IP network and an IP address, in accordance with said second kind of IP, of said first mobile agent is set as a home address, to an IP packet, in accordance with said second kind of IP, transmitted from said other nodes to said mobile node, adding further a first kind of IP header, in which an IP address, in accordance with said first kind of IP, of said second mobile agent belonging to said second IP network is set as a foreign address and an IP address, in accordance with said first kind of IP, of said first mobile agent is set as a home address, and transmitting said packet to said second mobile agent; and

10. A method of controlling a mobile node by a mobile agent in a network system in which a first IP (Internet Protocol) network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing

adding a first kind of an IP header, in which an IP address, in accordance with said first kind of IP, of a first mobile agent belonging to said first IP network is set as a foreign address by a second mobile agent belonging to said second IP network and an IP address, in accordance with said first kind of IP, of said second mobile agent is set as a home address, to an IP packet in accordance with said second kind of IP transmitted from said mobile node to said other node, and transmitting said IP packet to said first mobile agent; and

11. A method of controlling a mobile node by a mobile agent in a network system in which a first IP (Internet Protocol) network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing communication in accordance with only said first kind of

IP, so that said mobile node capable of executing communication in accordance with said second kind of IP can communicate with other nodes belonging to said first IP network in accordance with said second kind of IP when said mobile node moves from said first IP network to said second IP network, comprising the steps of:

adding a first kind of an IP header, in which an IP address, in accordance with said first kind of IP, of a first mobile agent belonging to said first IP network is set as a foreign address by a second mobile agent belonging to said second IP network and an IP address, in accordance with said first kind of IP, of said second mobile agent is set as a home address, to a movement registration request message in accordance with said second kind of IP received from said mobile node, and transmitting said message to said first mobile agent;

adding a first kind of an IP header, in which an IP address, in accordance with said first kind of IP, of said second mobile agent is set as a foreign address by said first mobile agent and an IP address, in accordance with said first kind of IP, of said first mobile agent is set as a home address, to a message in accordance with said second kind of IP for permitting the movement, and transmitting said message to said second mobile agent; and

deleting said first kind of said IP header by
said second mobile agent and transmitting said message to
said mobile node.

[illegible][illegible][illegible][illegible]

[illegible][illegible]

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

[illegible]

[illegible][illegible][illegible][illegible]

means for adding an IP header, in which an IP address, in accordance with said first kind of IP, of a first mobile agent belonging to said first IP network is set as a foreign address and an IP address, in accordance with said first kind of IP, of said mobile agent itself belonging to said second IP network is set as a home address, to an IP packet in accordance with said second kind of IP transmitted from said mobile node to said other nodes, and transmitting said IP packet to said first mobile agent.

18. A mobile agent for controlling a mobile node in a network system in which a first IP (Internet Protocol) network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing communication in accordance with only said first kind of IP are connected with each other, so that a mobile agent capable of executing communication in accordance with said second kind of IP

can execute communication with other nodes belonging to said first IP network in accordance with said second kind of IP when said mobile node moves from said first IP network to said second IP network, comprising:

means for adding a first kind of an IP header, in which an IP address, in accordance with said first kind of IP, of a first mobile agent belonging to said first IP network is set as a foreign address and an IP address, in accordance with said first kind of IP, of said mobile agent itself belonging to said second IP network is set as a home address, to a movement registration request message in accordance with said second kind of IP received from said mobile node, and transmitting said message to said first mobile agent.

19. A mobile agent for controlling a mobile node in a network system in which a first IP (Internet Protocol) network capable of executing communication in accordance with first and second kinds of IPs and a second IP network capable of executing communication in accordance with only said first kind of IP are connected with each other, so that a mobile node capable of executing communication in accordance with said second kind of IP can execute communication with other nodes belonging to said first IP network in accordance with said second kind of IP when said mobile node moves from said first IP network to said second IP network, comprising, wherein:

said mobile agent belonging to said first IP network adds a first kind of an IP header, in which an IP

006250 0564960

address, in accordance with said first kind of IP, of a second mobile agent belonging to said second IP network is set as a foreign address and an IP address, in accordance with said first kind of IP, of said mobile agent itself is set as a home address, to a message in accordance with said second kind of IP for permitting the movement, and transmitting said message to said second mobile agent.

A mobile node moves from a first IP (Internet Protocol) network to a second IP network in a network system in which the first IP network capable of executing communication in accordance with both first and second kinds of IPs and the second IP network capable of executing communication in accordance with only the first kind of IP are connected with each other. When the mobile node communicates a message with other nodes on the first network after its movement accordance with the second kind of IP, a header for the movement containing both home and foreign addresses of the first kind in IP is added to a header containing home and foreign addresses in the second kind of IP, and put to the message, is added. The message to which the movement header is thus added is used for the communication between a first mobile agent on the first network and a second mobile agent on the second network, or between the mobile node and the first mobile agent.

FIG. 2


119 MOVEMENT STATUS
MANAGEMENT TABLE

200 ~	OWN IPv4 ADDRESS	10.0.0.1
201 ~	OWN IPv4 NETWORK ADDRESS	10.0.0.0
202 ~	OWN IPv6 ADDRESS	::11.0.0.1
203 ~	OWN IPv6 NETWORK ADDRESS	::11.0.0.0
204 ~	IPv4 MOBILE AGENT IPv4 ADDRESS	10.0.0.11
205 ~	IPv6 MOBILE AGENT IPv4 ADDRESS	10.0.0.20
206 ~	IPv6 MOBILE AGENT IPv6 ADDRESS	::11.0.0.20
207 ~	POST-MOVEMENT IPv4 NETWORK ADDRESS	10.0.0.0
208 ~	PRE-MOVEMENT IPv4 NETWORK ADDRESS	10.0.0.0
209 ~	POST-MOVEMENT IPv6 NETWORK ADDRESS	::11.0.0.0
210 ~	PRE-MOVEMENT IPv6 NETWORK ADDRESS	::11.0.0.0

FIG. 3

MOBILE NODE IPv6 ADDRESS	FOREIGN IPv6 ADDRESS	FOREIGN IPv4 ADDRESS
::11.0.0.1	NULL	20.0.0.1
::11.0.0.5	::31.0.0.5	NULL
::11.0.0.6	::41.0.0.6	NULL
:	:	:

FIG. 4

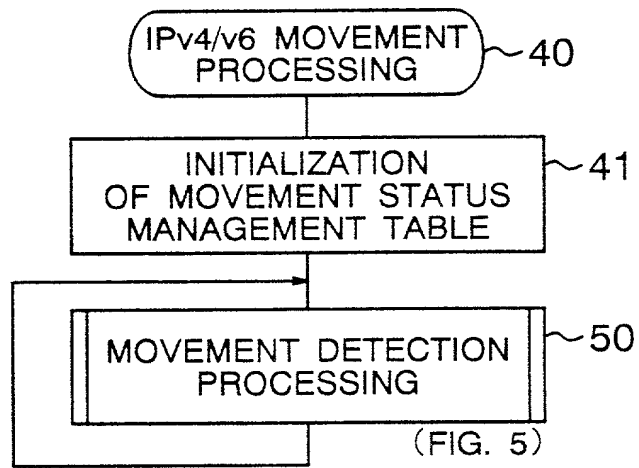

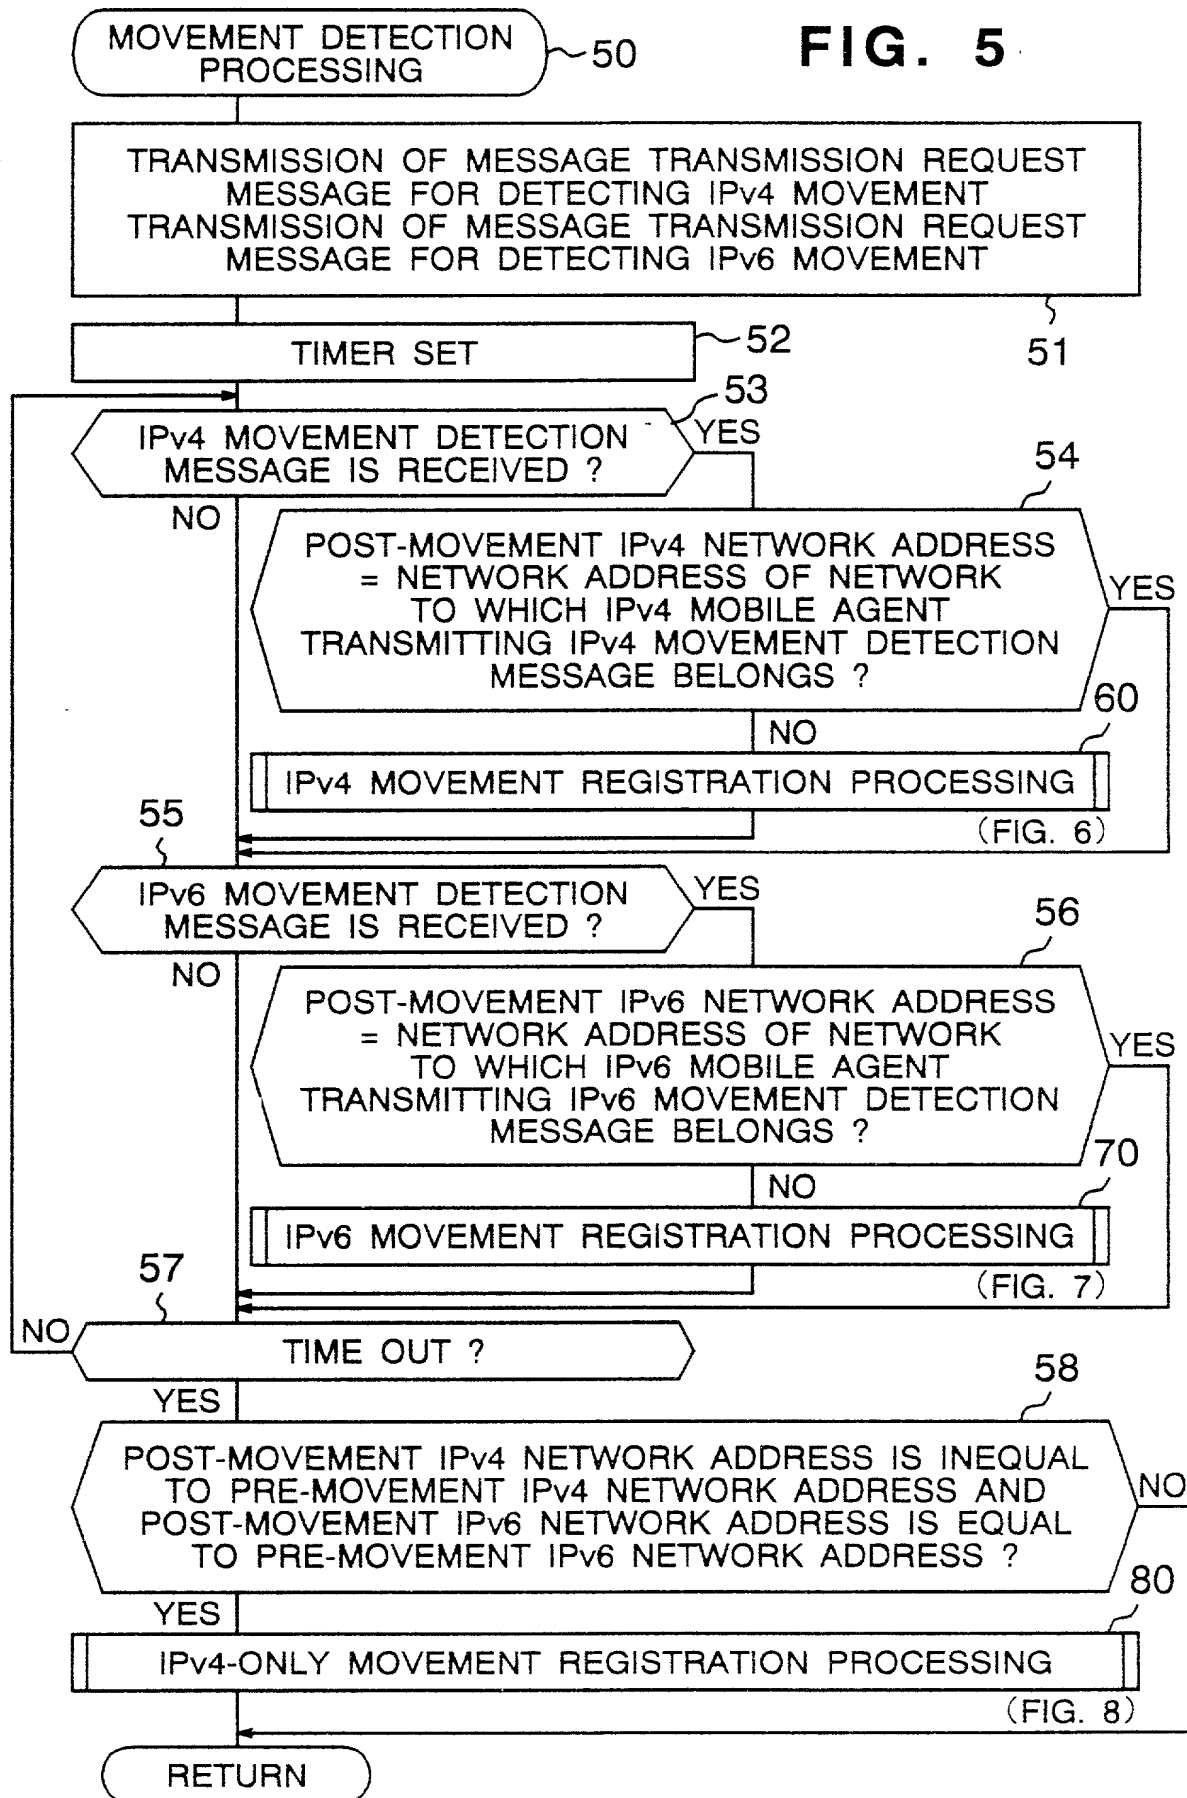


FIG. 6

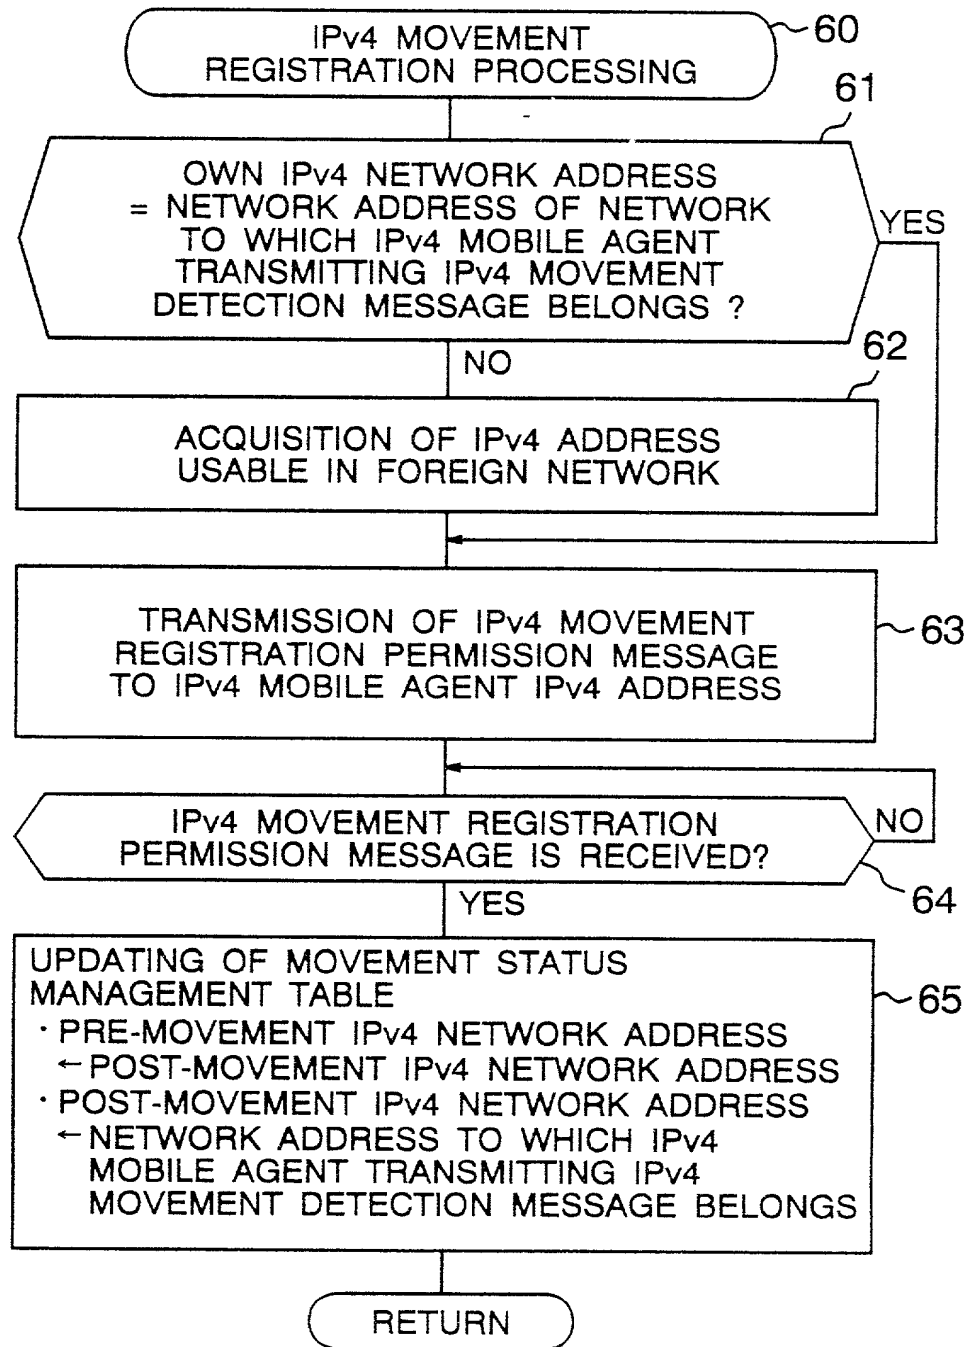


FIG. 7

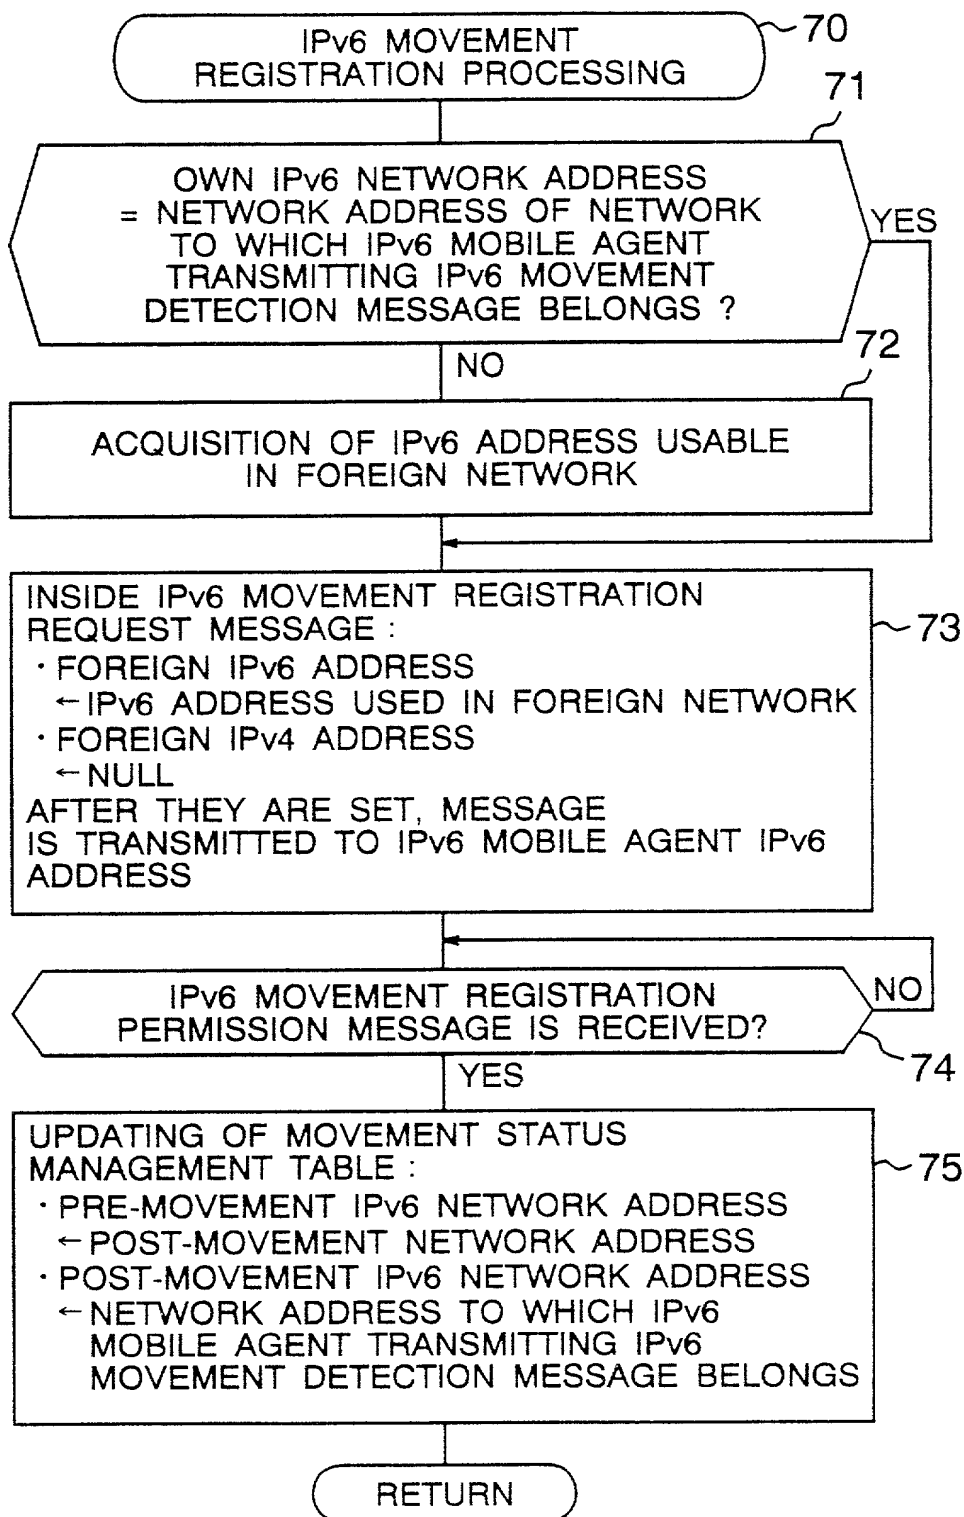


FIG. 8

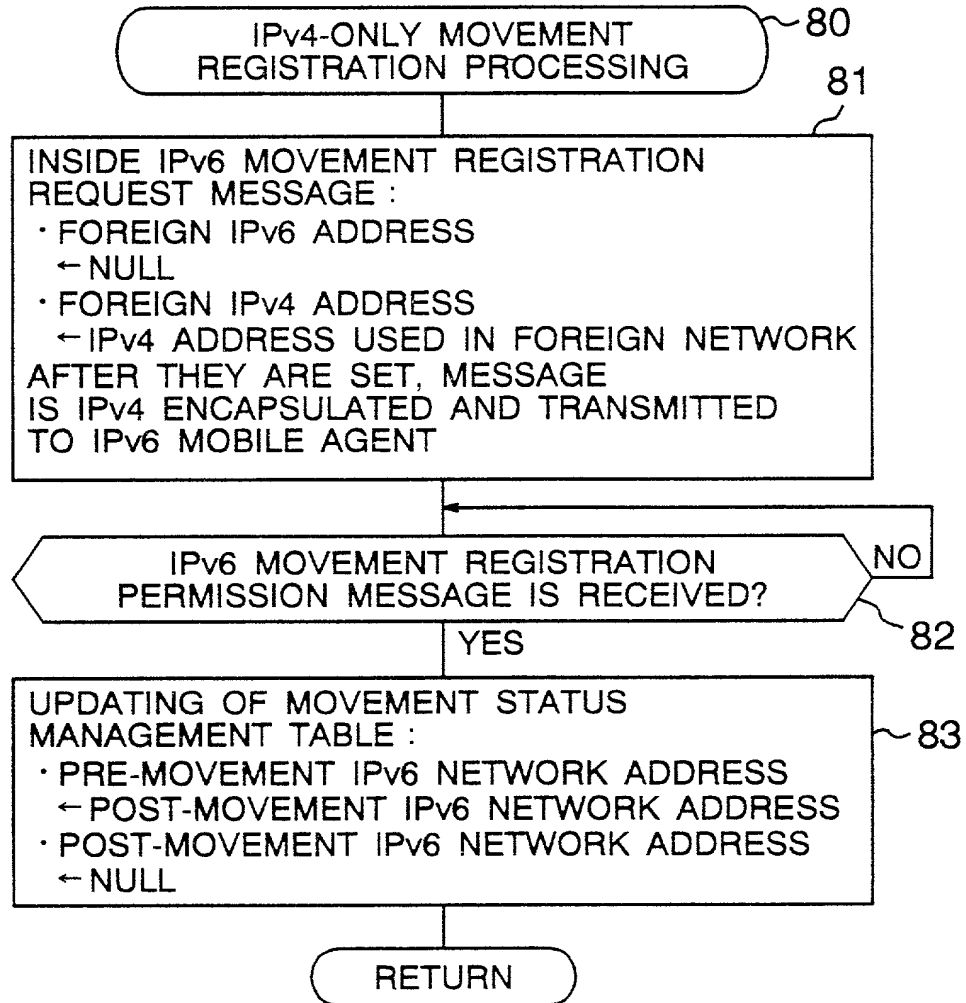
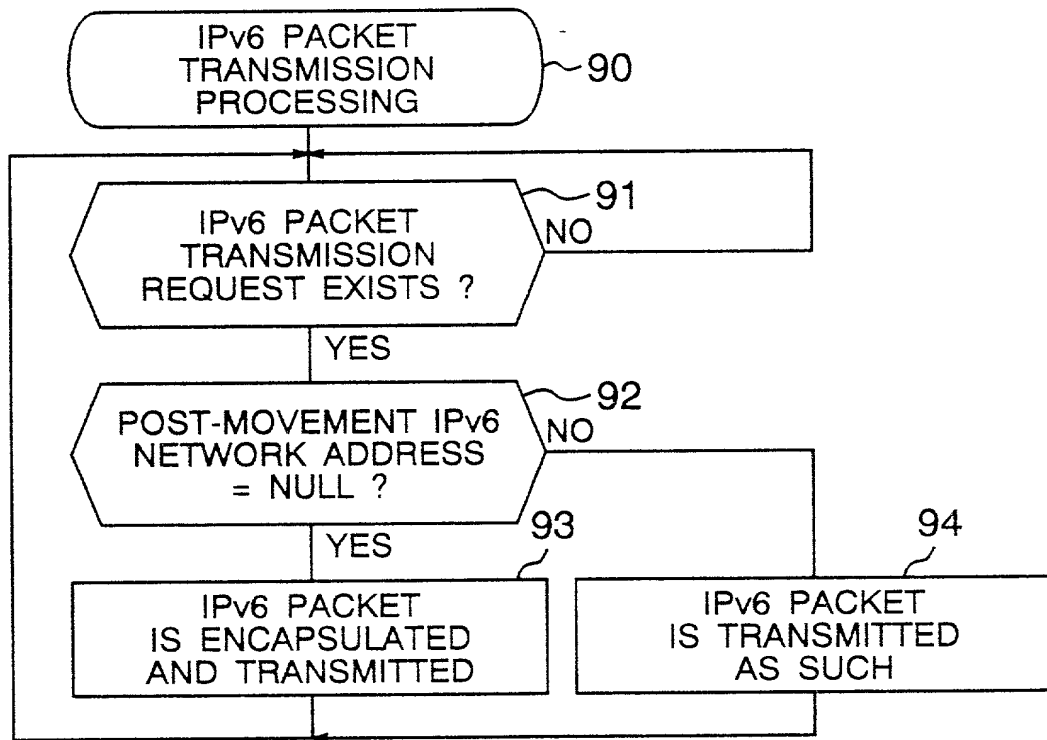


FIG. 9



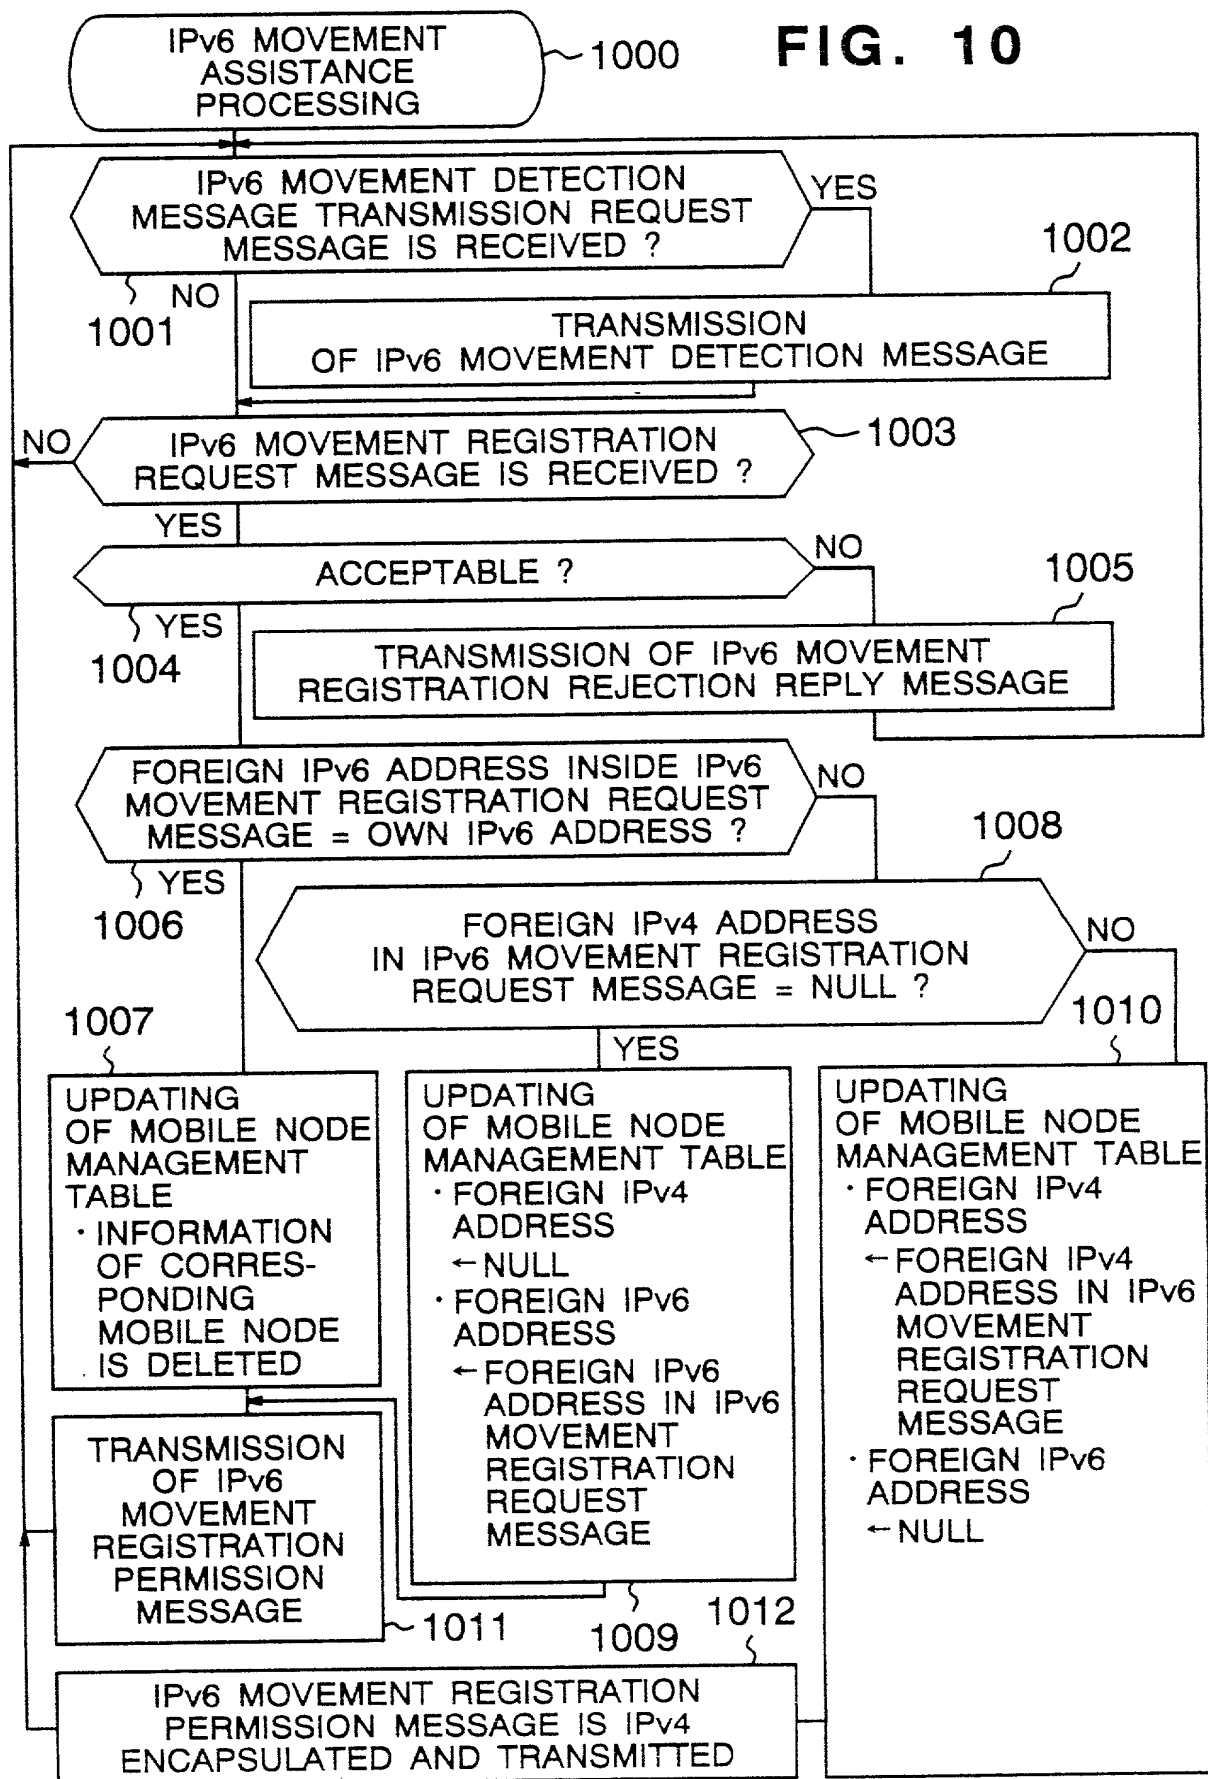


FIG. 11

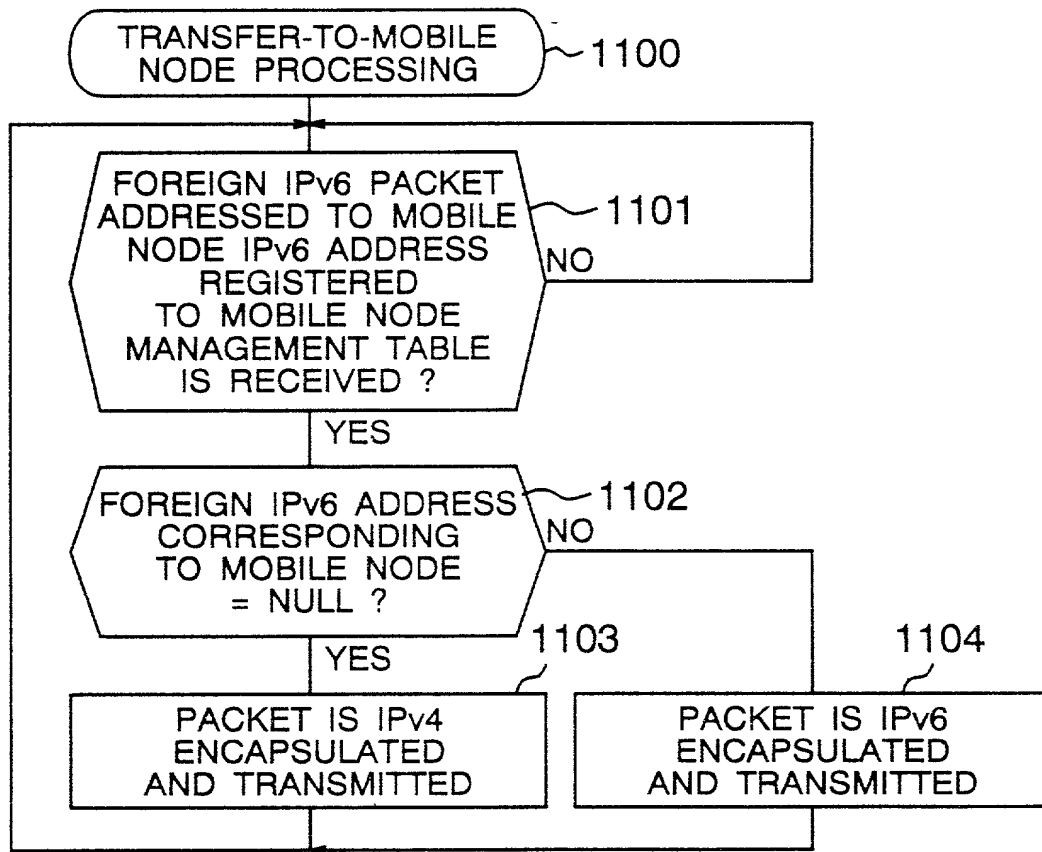


FIG. 12

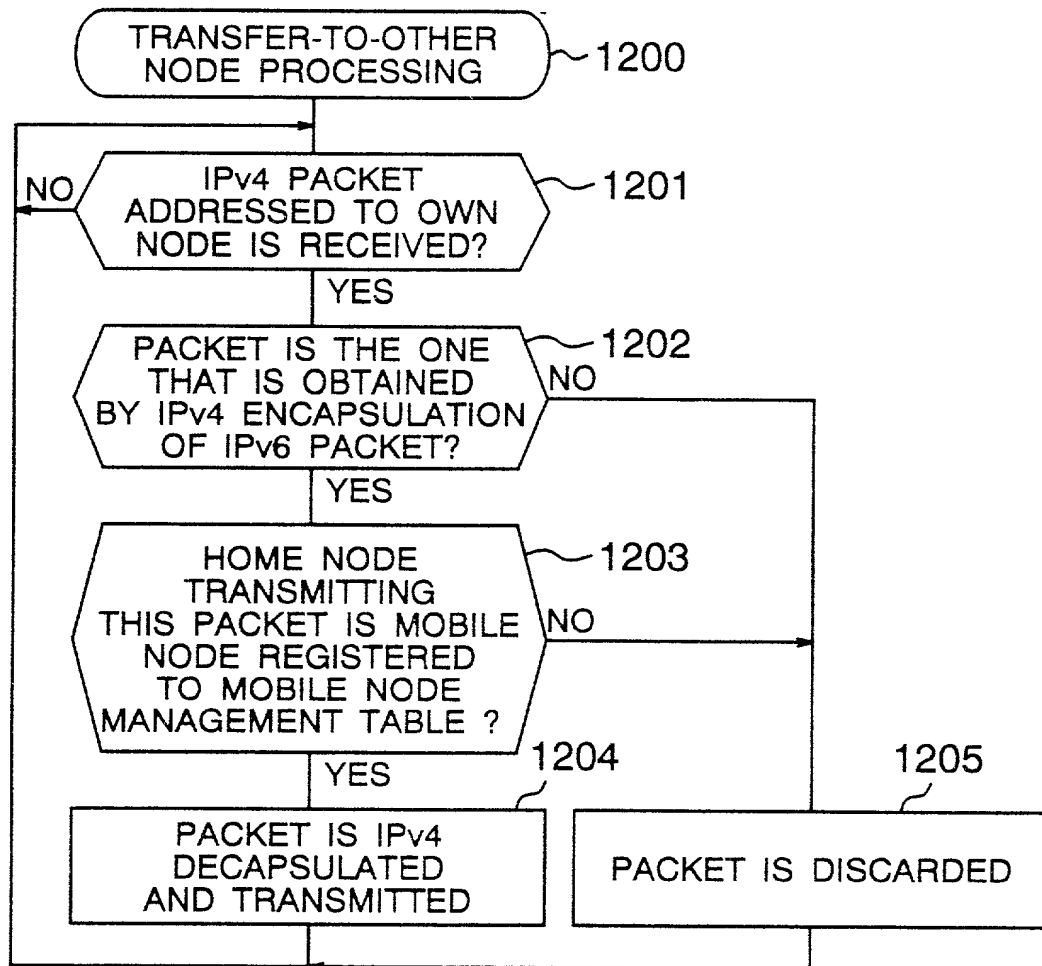


FIG. 13

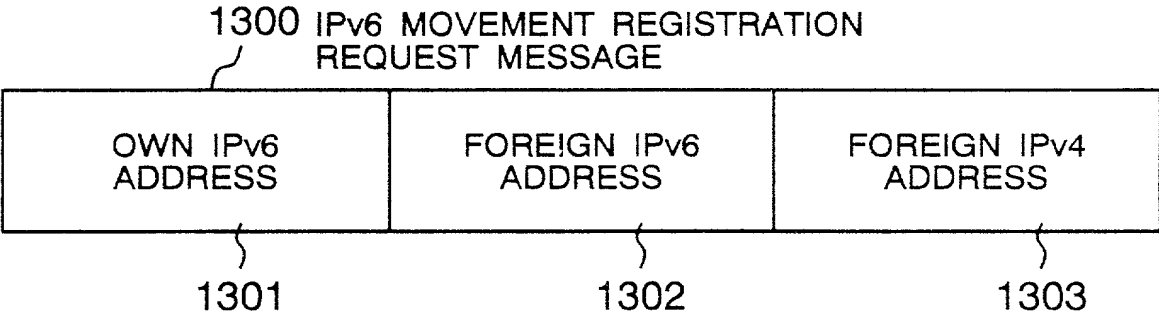


FIG. 14

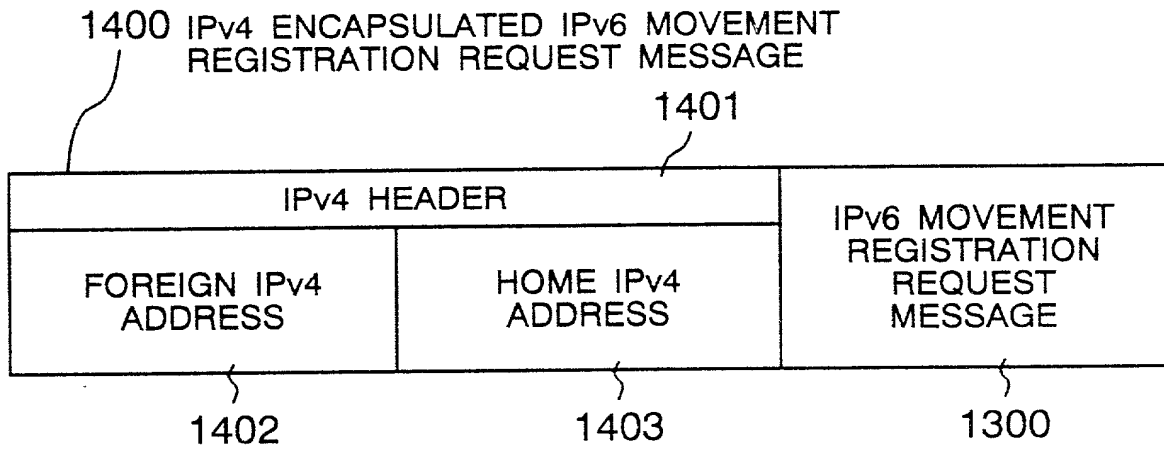


FIG. 15

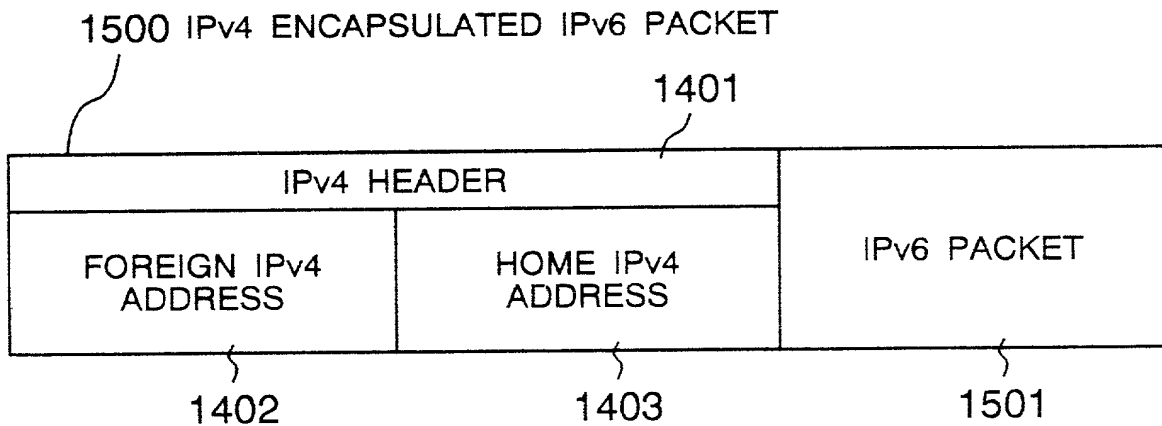


FIG. 16

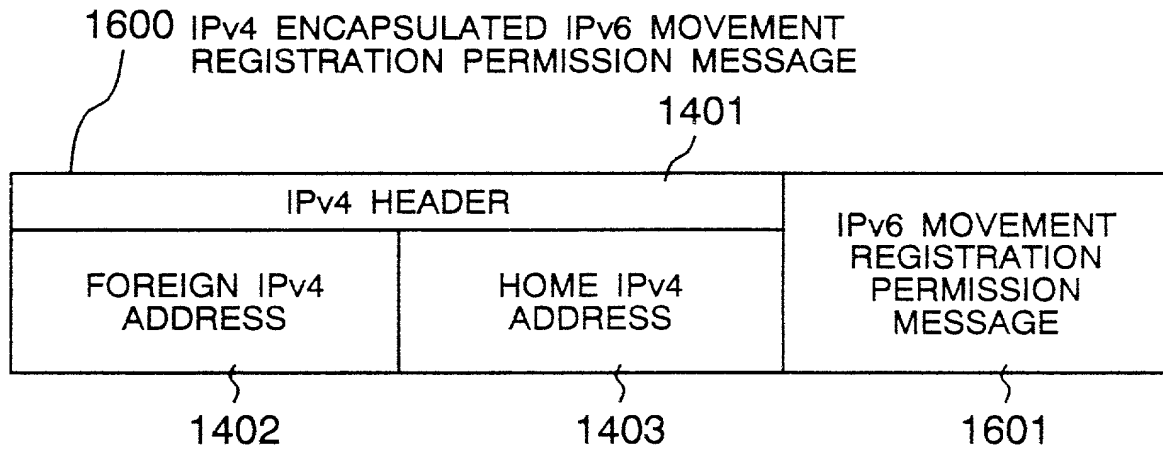


FIG. 17

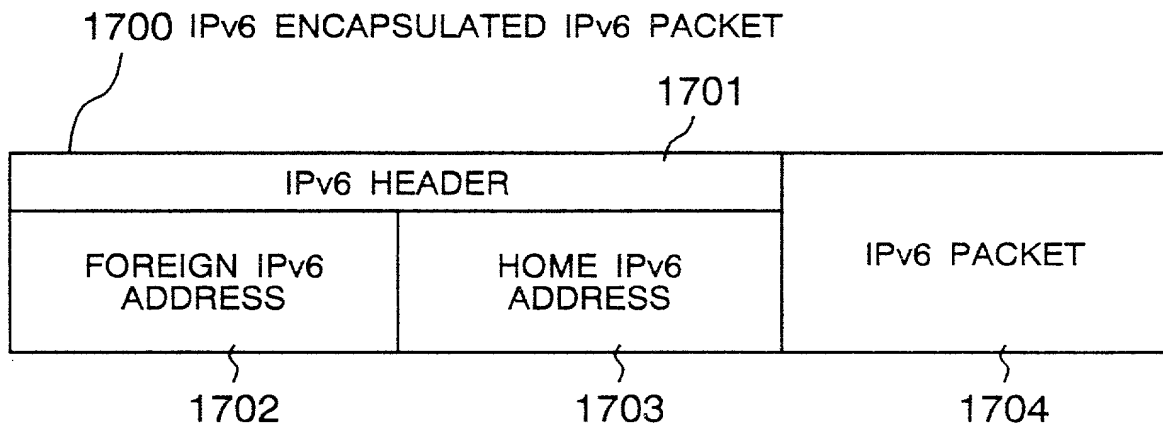



FIG. 19

1822	1920	1921	1922
MOBILE NODE IPv6 ADDRESS	FOREIGN IPv6 ADDRESS	FOREIGN IPv6 MOBILE AGENT IPv4 ADDRESS	
11::30	21::30	20.0.0.1	
11::5	31::5	NULL	
11::6	41::6	NULL	
...	

HOME IPv6 MOBILE AGENT IPv4 ADDRESS	HOME IPv6 MOBILE AGENT IPv6 ADDRESS
10.0.0.1	11::1
30.0.0.3	31::3
40.0.0.4	41::4
...	...

1828	2140	2141	2142
MOBILE NODE IPv6 ADDRESS	HOME IPv6 MOBILE AGENT IPv4 ADDRESS	REGISTRATION FLAG	
11::30	10.0.0.1	REAL REGISTRATION	
31::1	30.0.0.3	TENTATIVE REGISTRATION	
41::1	40.0.0.4	REAL REGISTRATION	
...	

FIG. 23

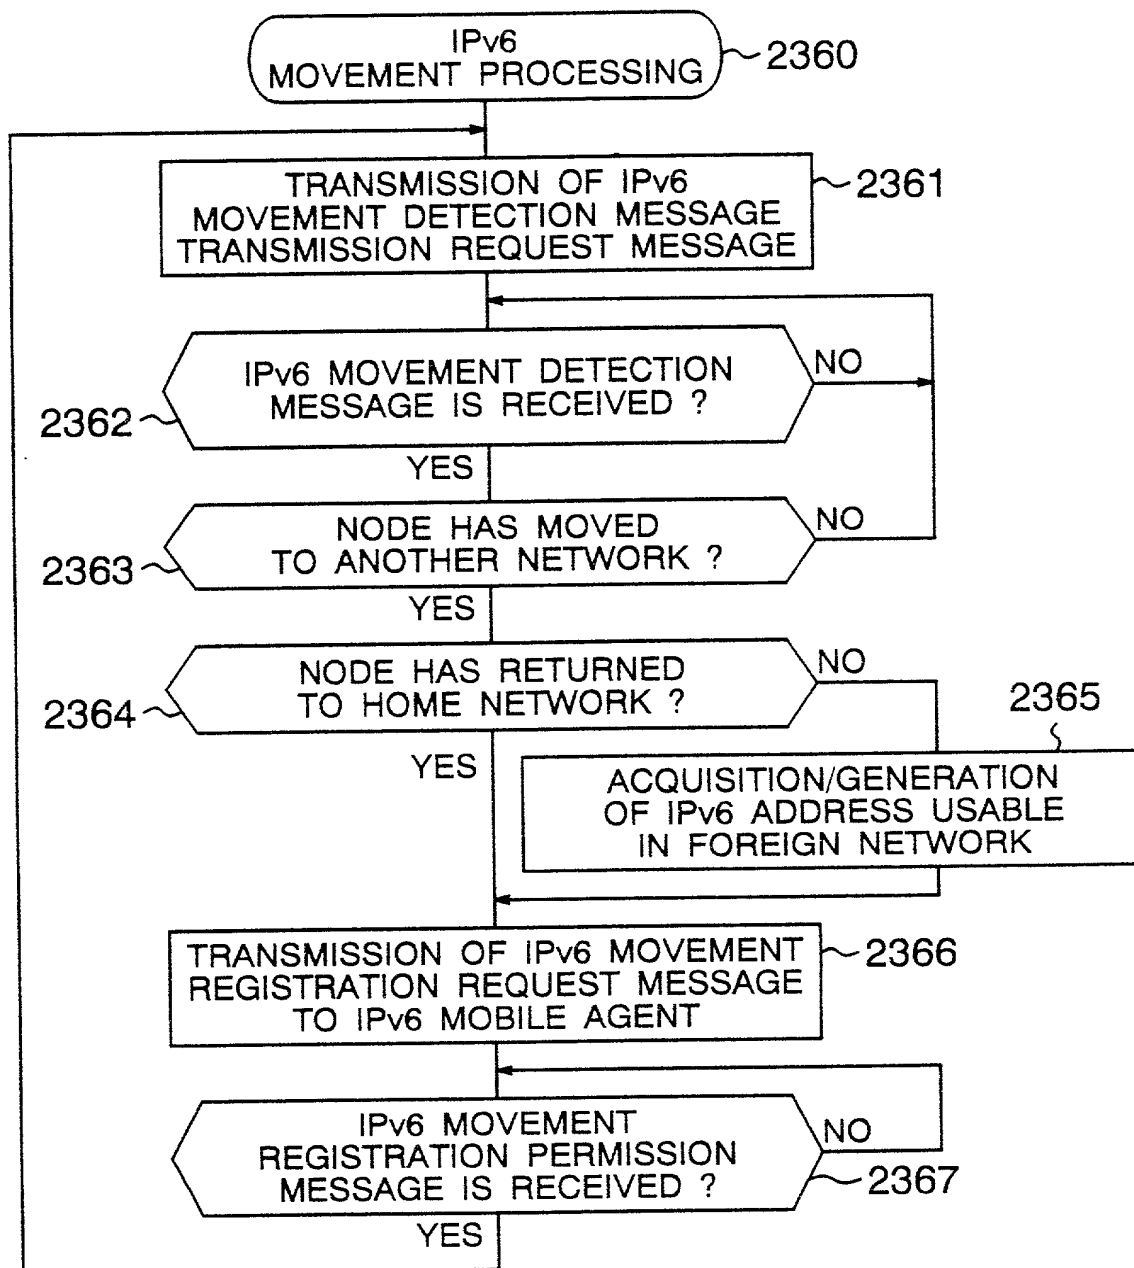

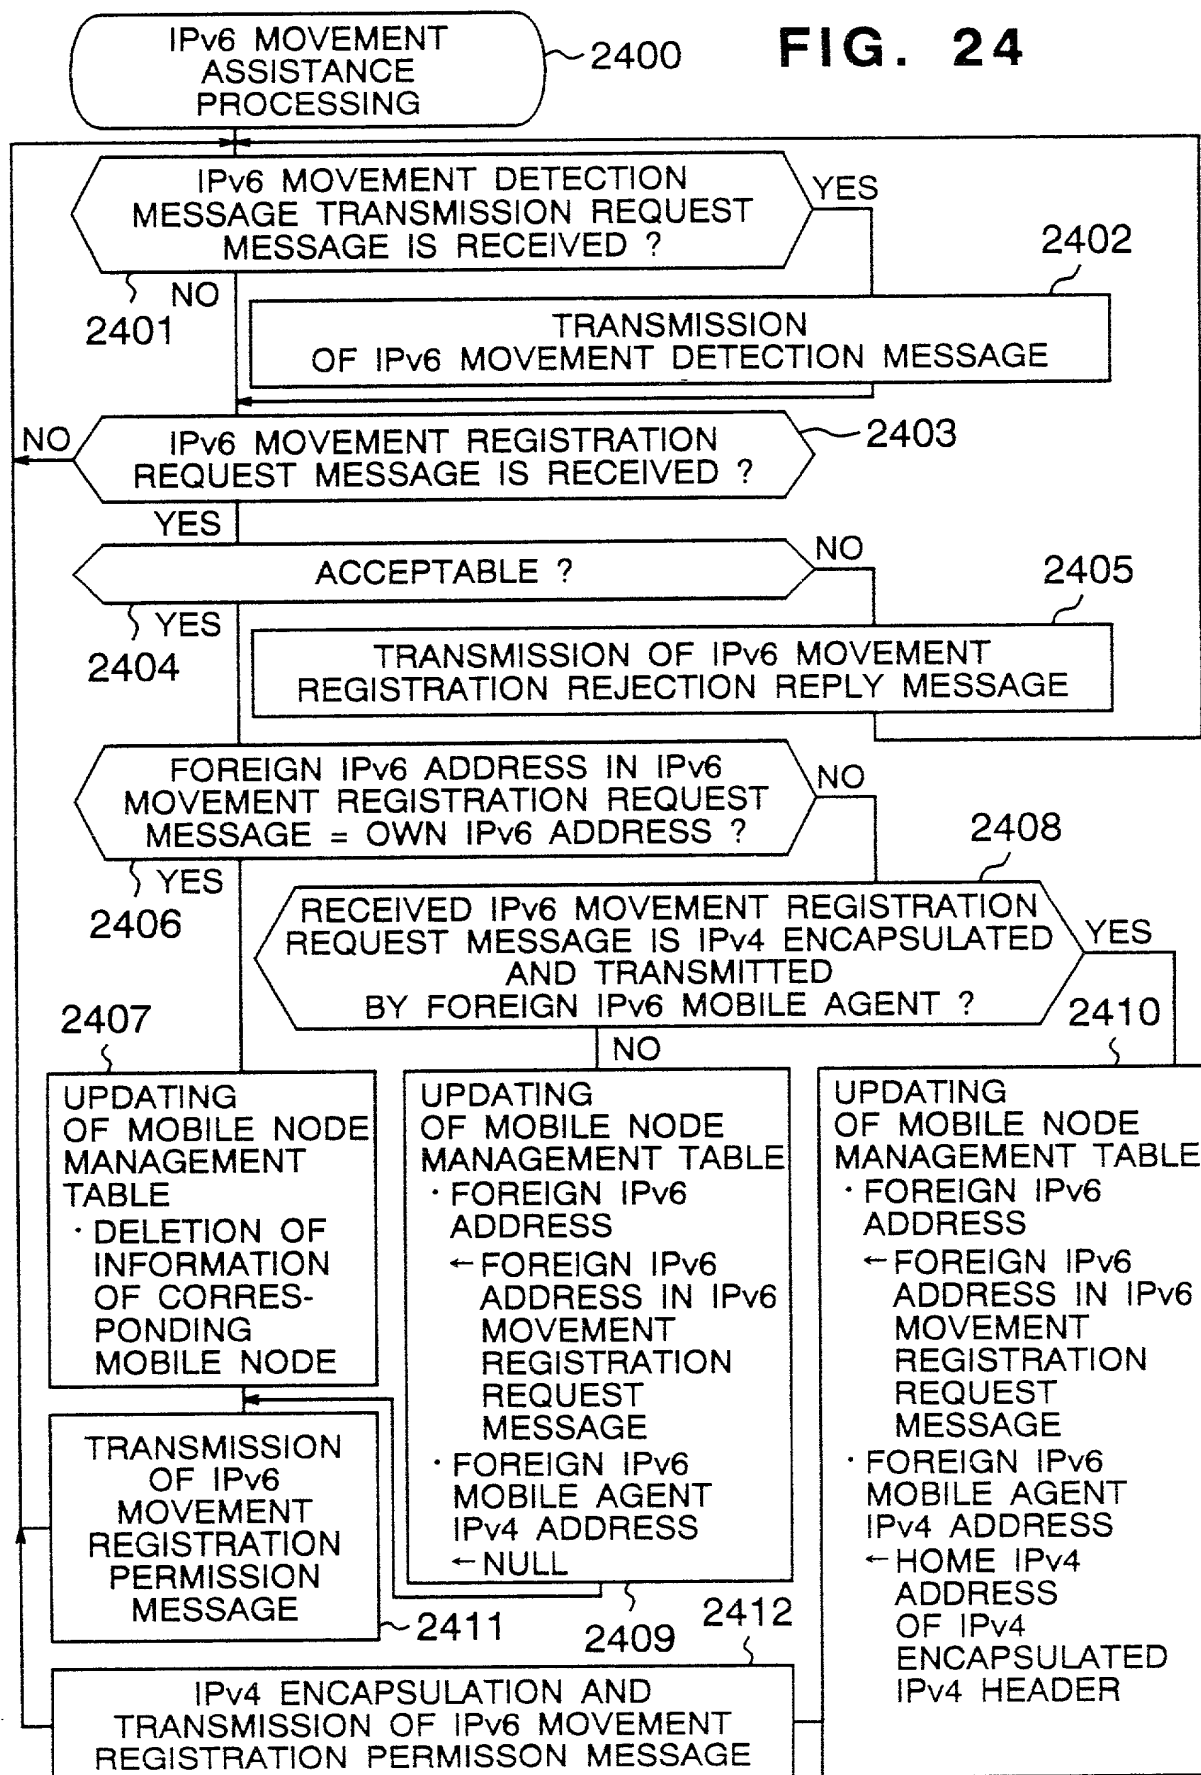


FIG. 25

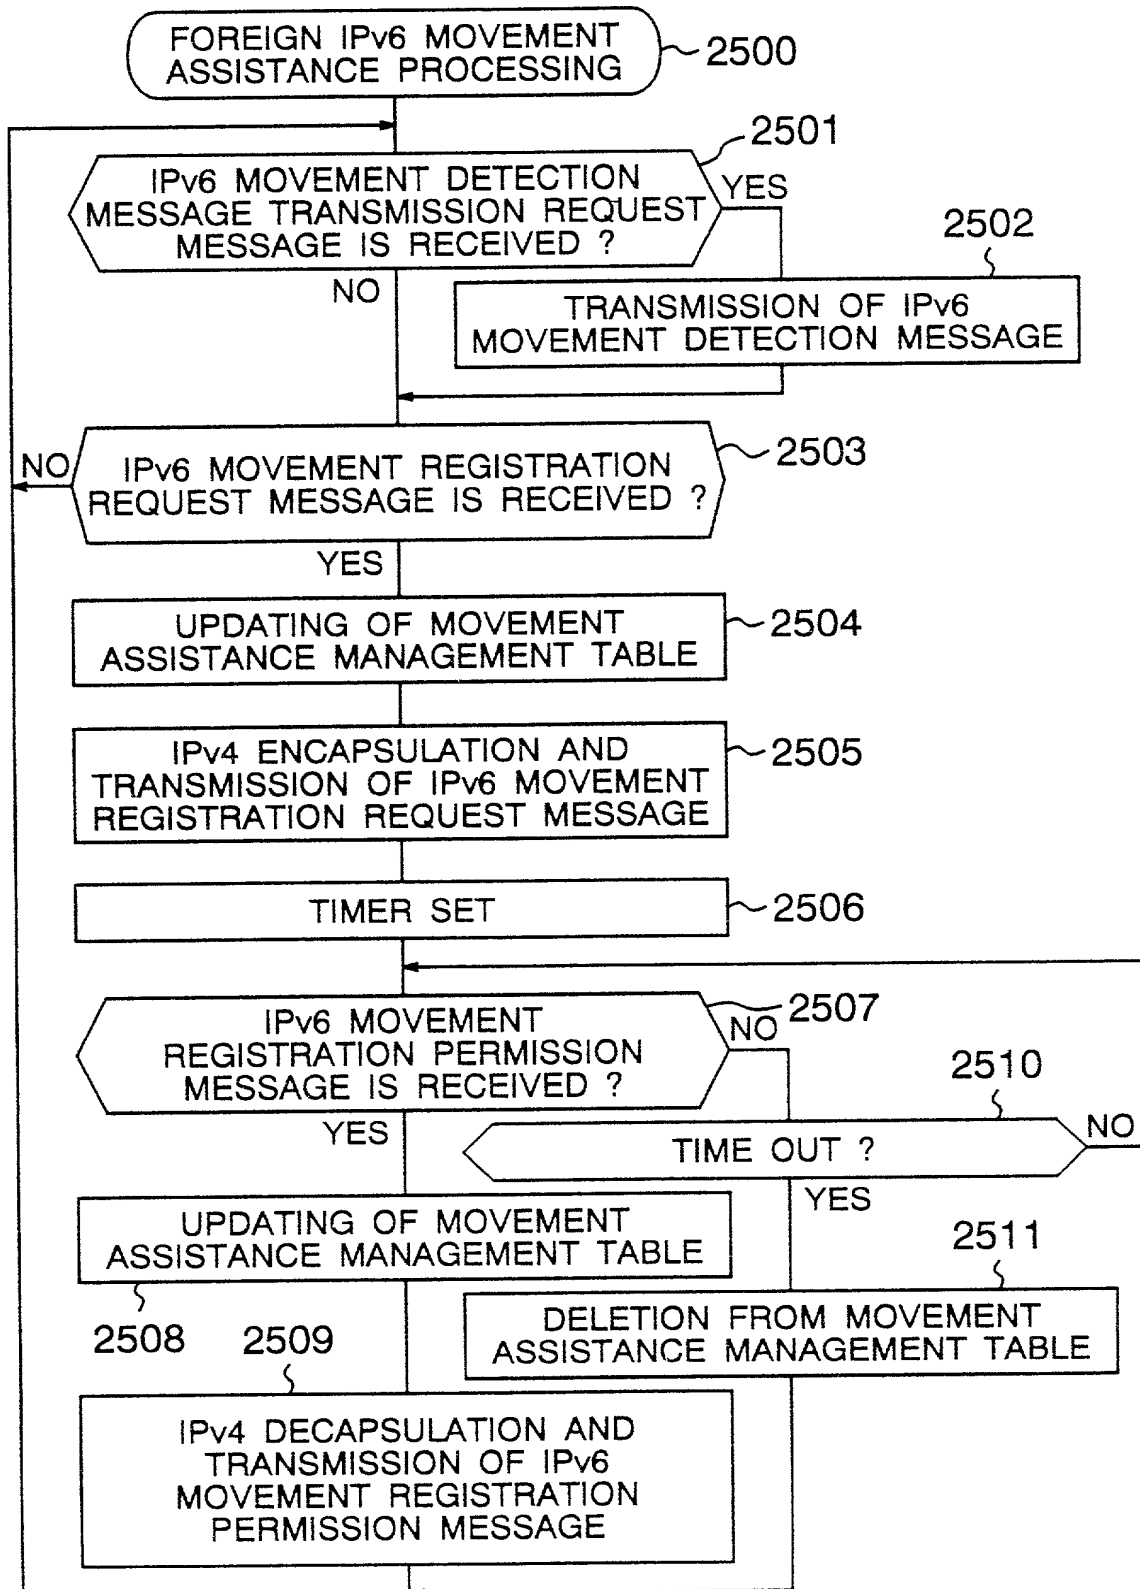


FIG. 26

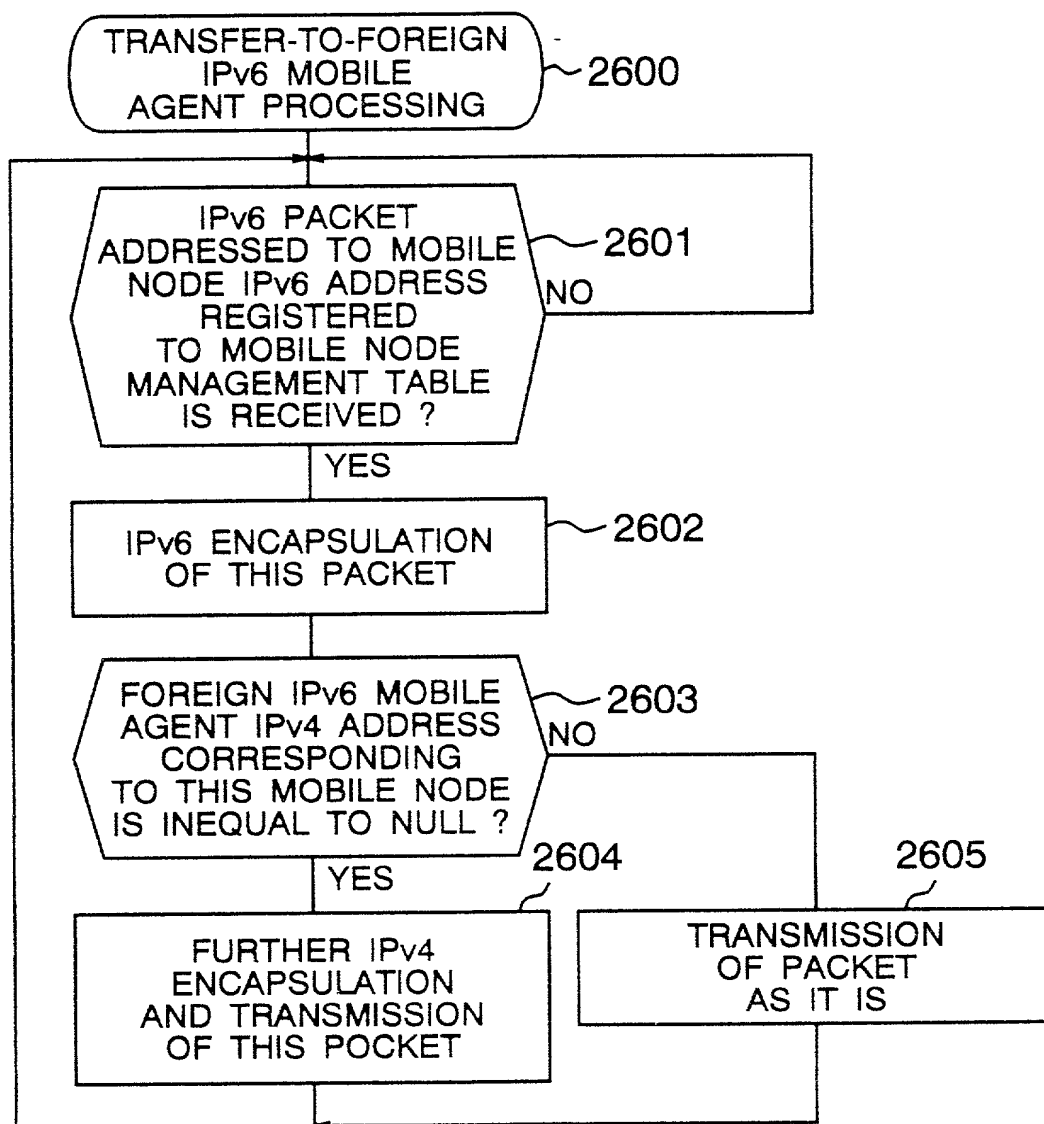


FIG. 27

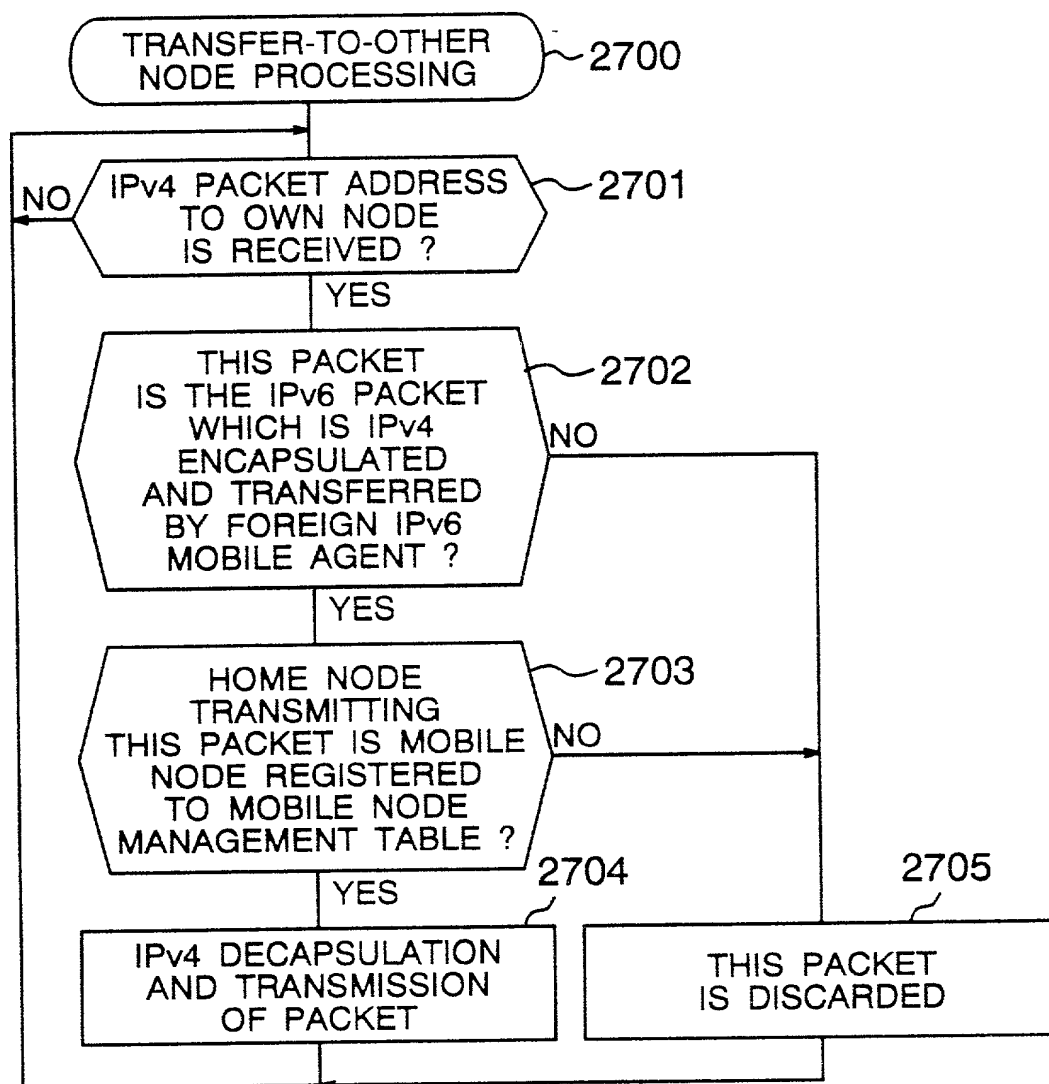


FIG. 28

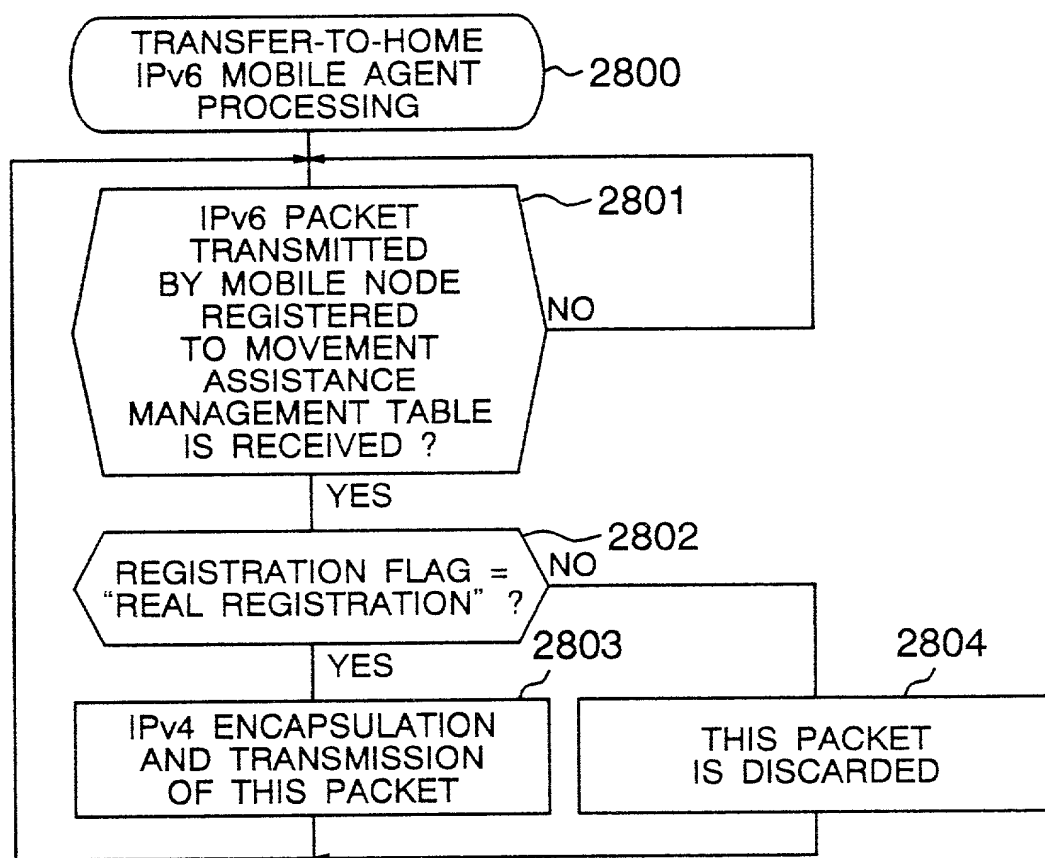


FIG. 29

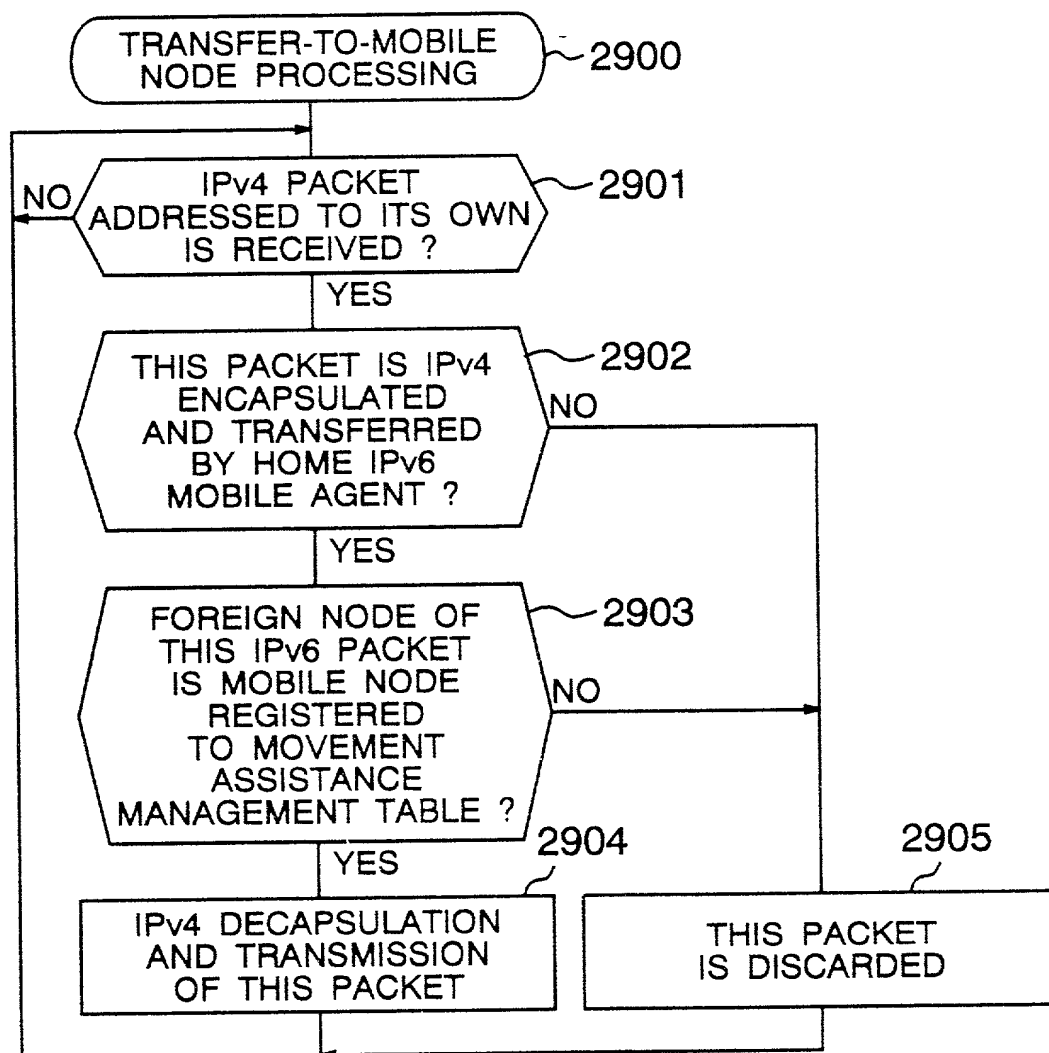


FIG. 30

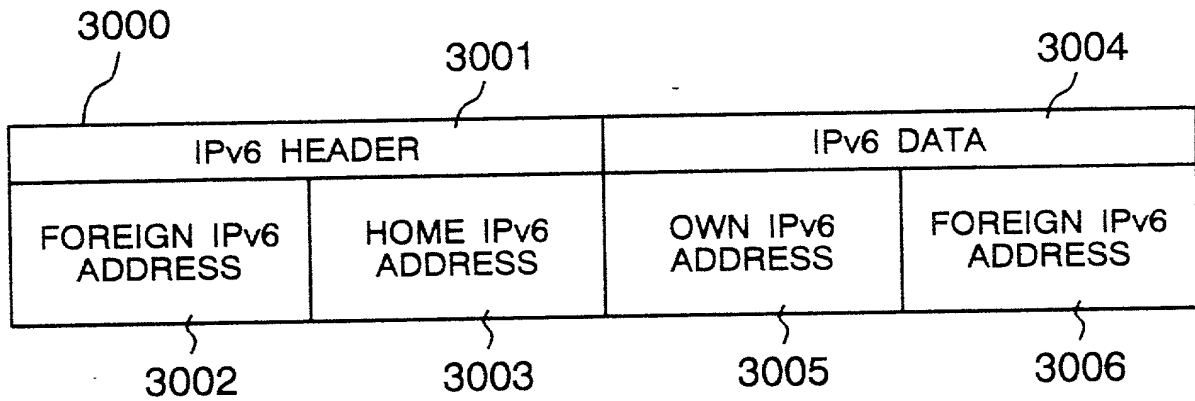


FIG. 31

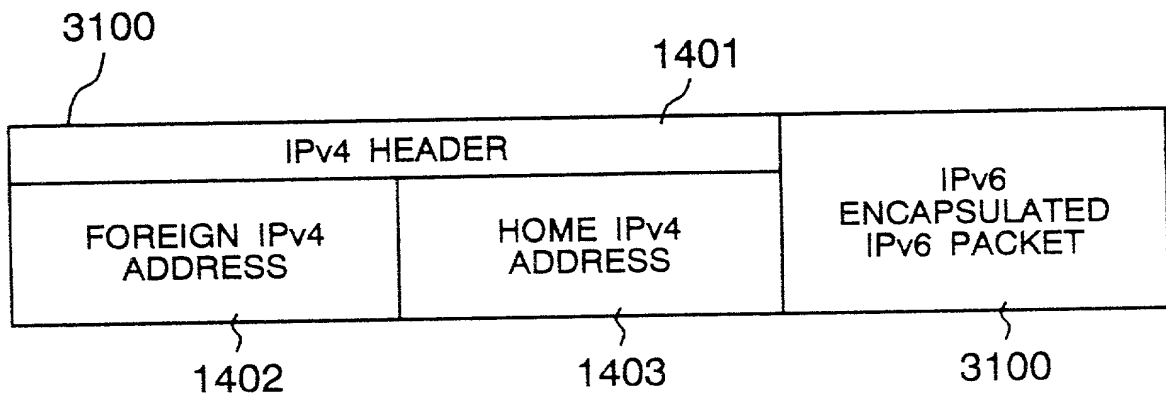


FIG. 33

3217	3300	3301	3302
MOBILE NODE IPv4 ADDRESS	FOREIGN IPv4 ADDRESS	FOREIGN IPv4 MOBILE AGENT IPv6 ADDRESS	
10.0.0.30	20.0.0.30	21::1	
10.0.0.5	30.0.0.5	NULL	
10.0.0.6	40.0.0.6	NULL	
...	

FIG. 35

3229	3500	3501	3502
MOBILE NODE IPv4 ADDRESS	HOME IPv4 MOBILE AGENT IPv6 ADDRESS	REGISTRATION FLAG	
10.0.0.30	11::1	REAL REGISTRATION	
30.0.0.1	31::3	TENTATIVE REGISTRATION	
40.0.0.1	41::4	REAL REGISTRATION	
...	

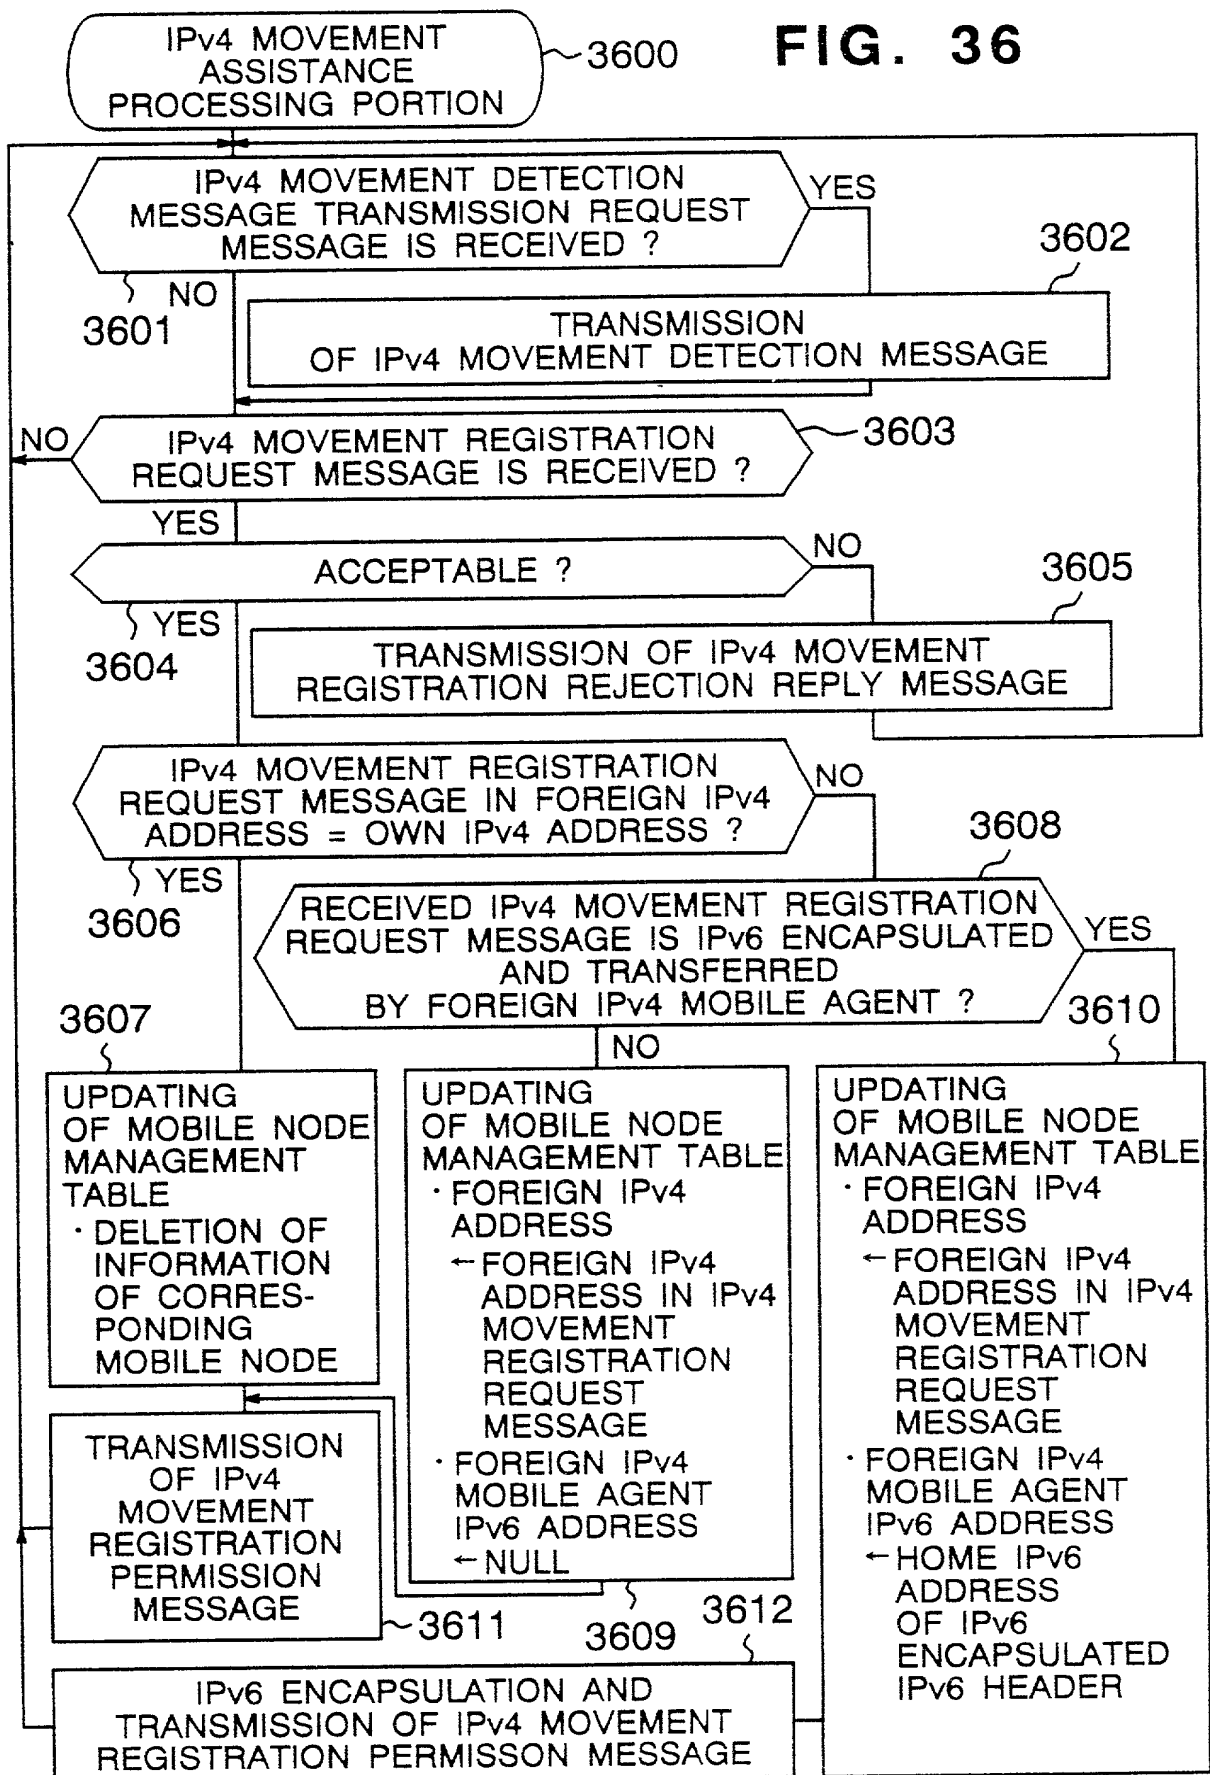


FIG. 37

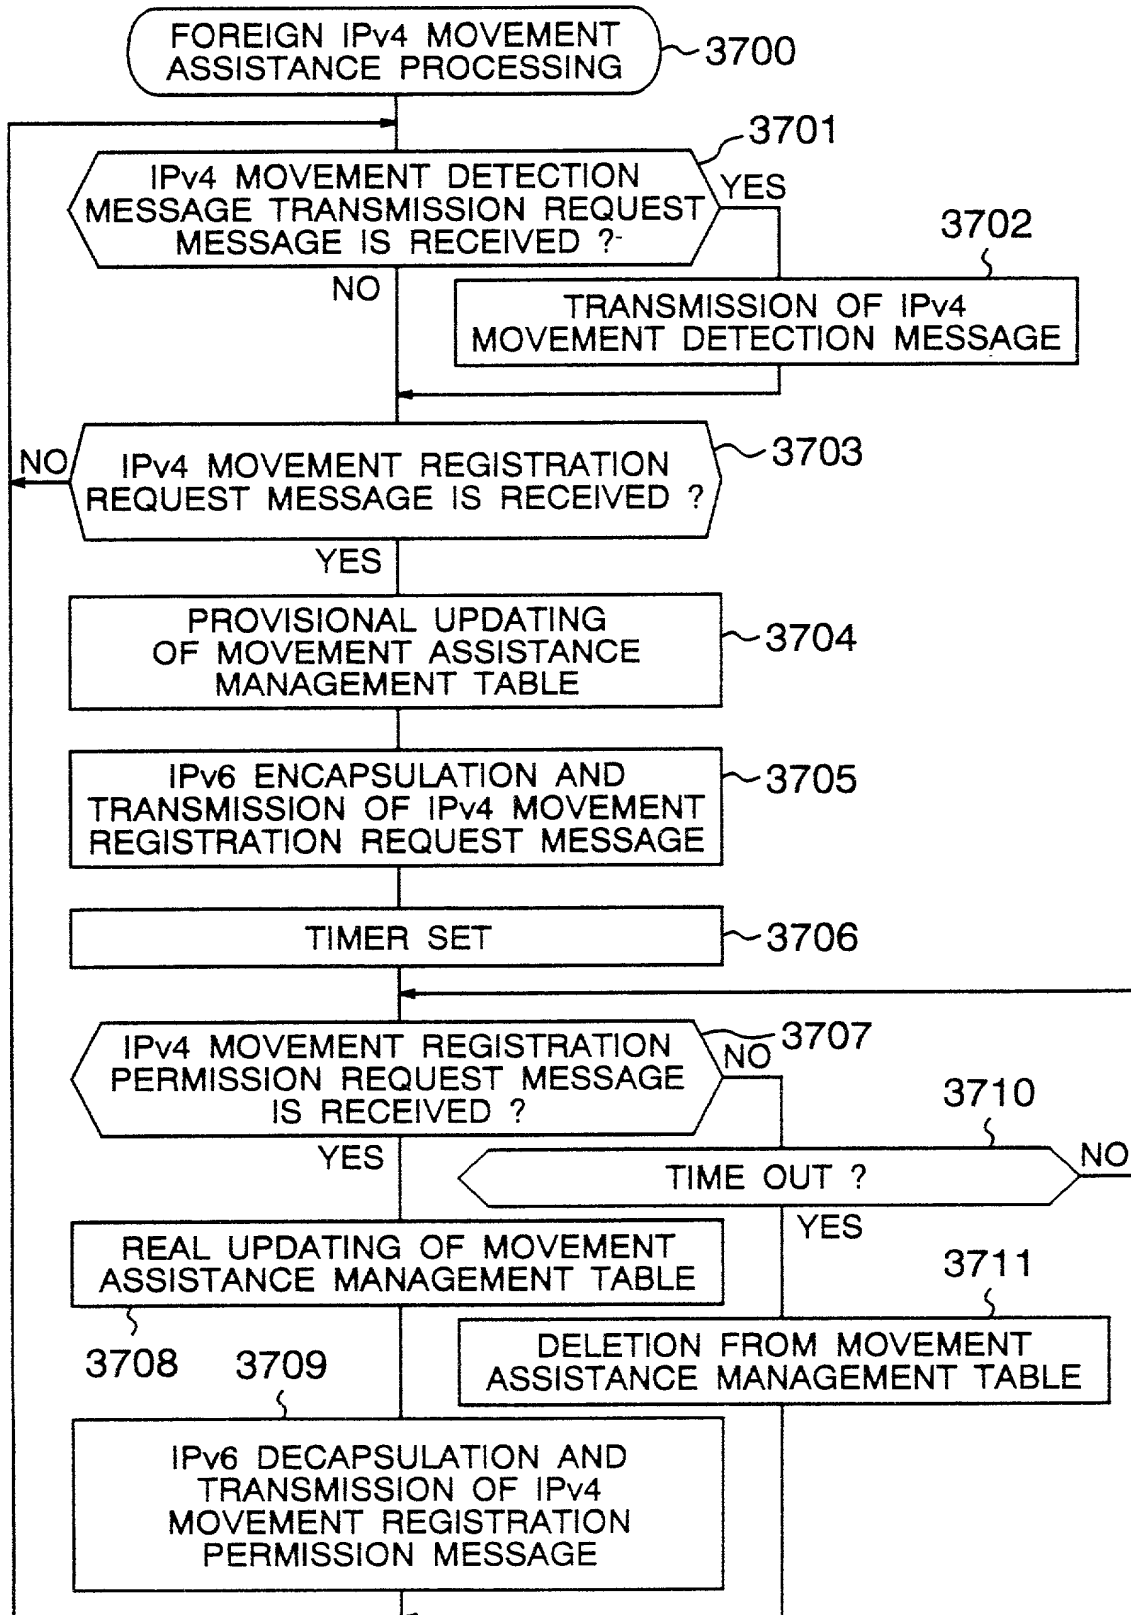


FIG. 38

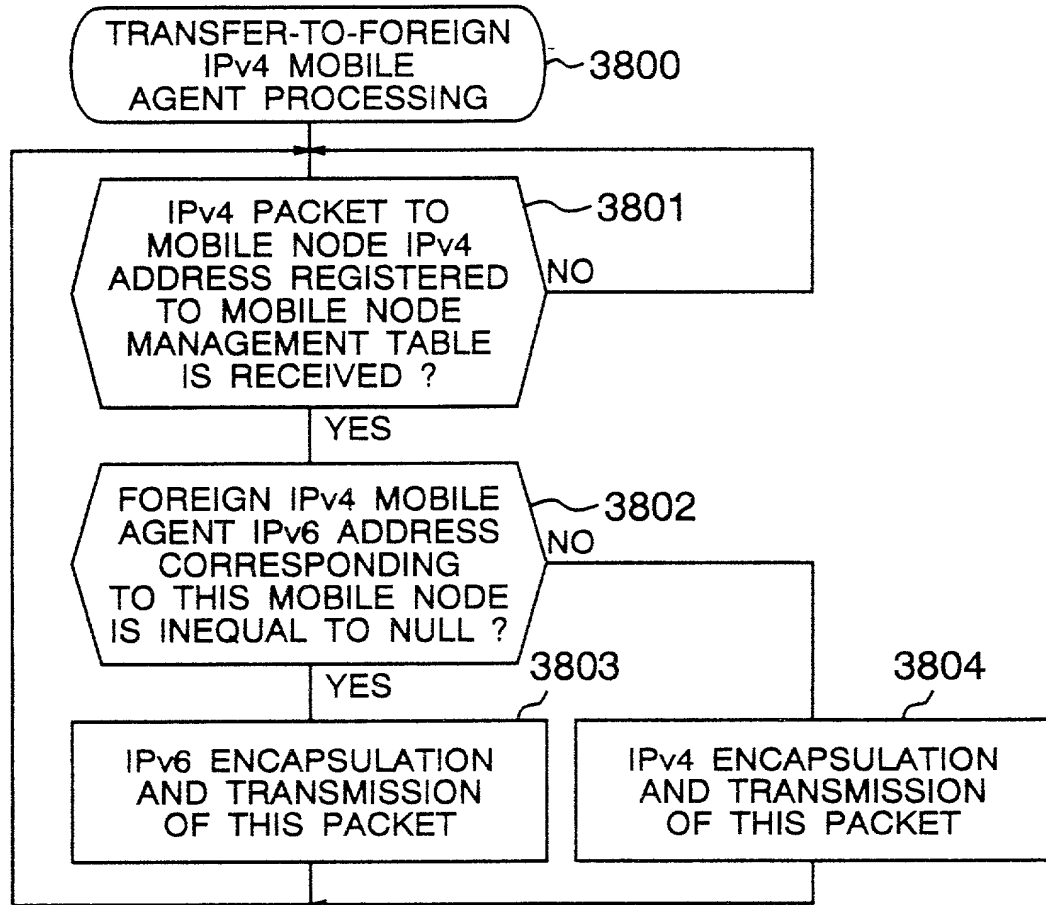


FIG. 39

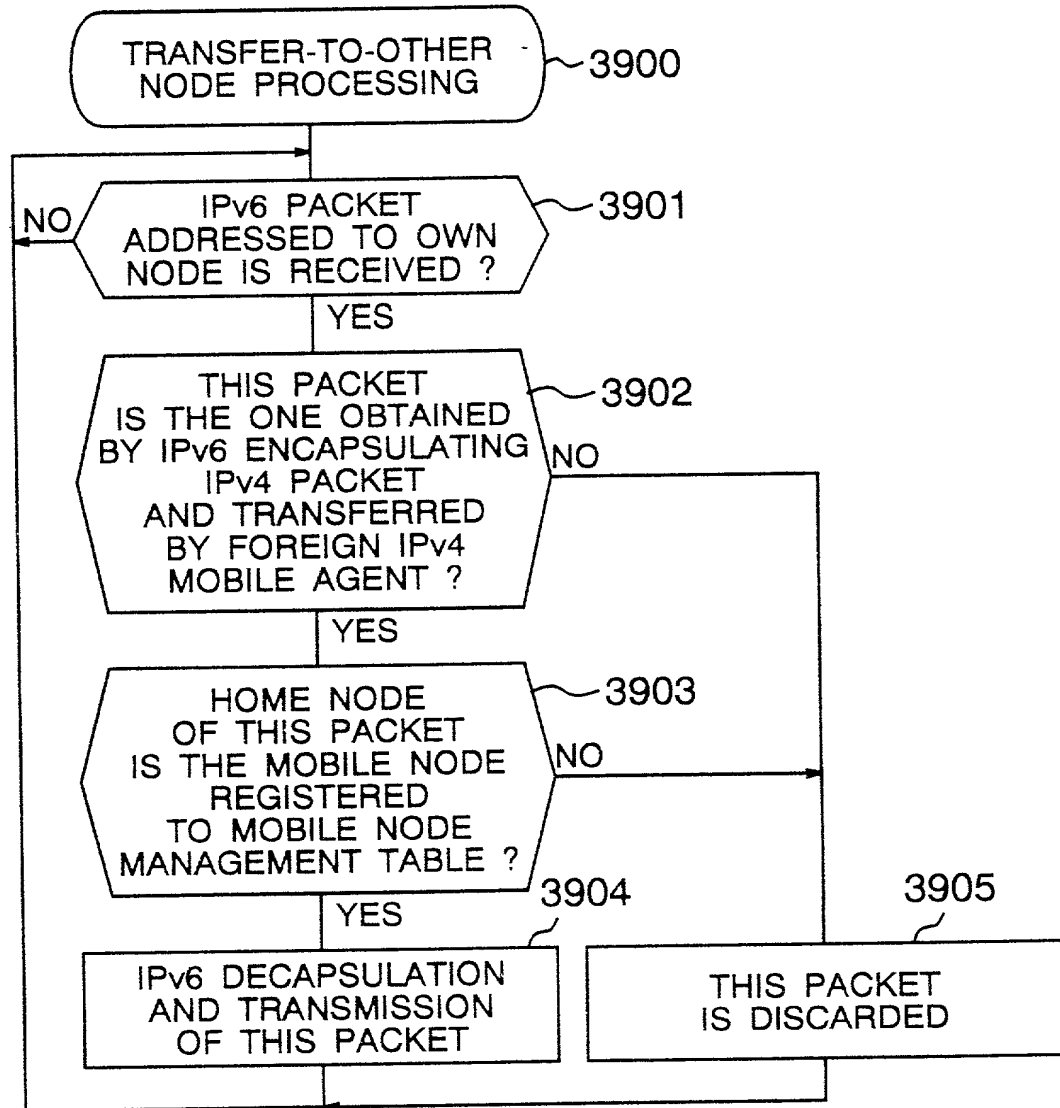


FIG. 40

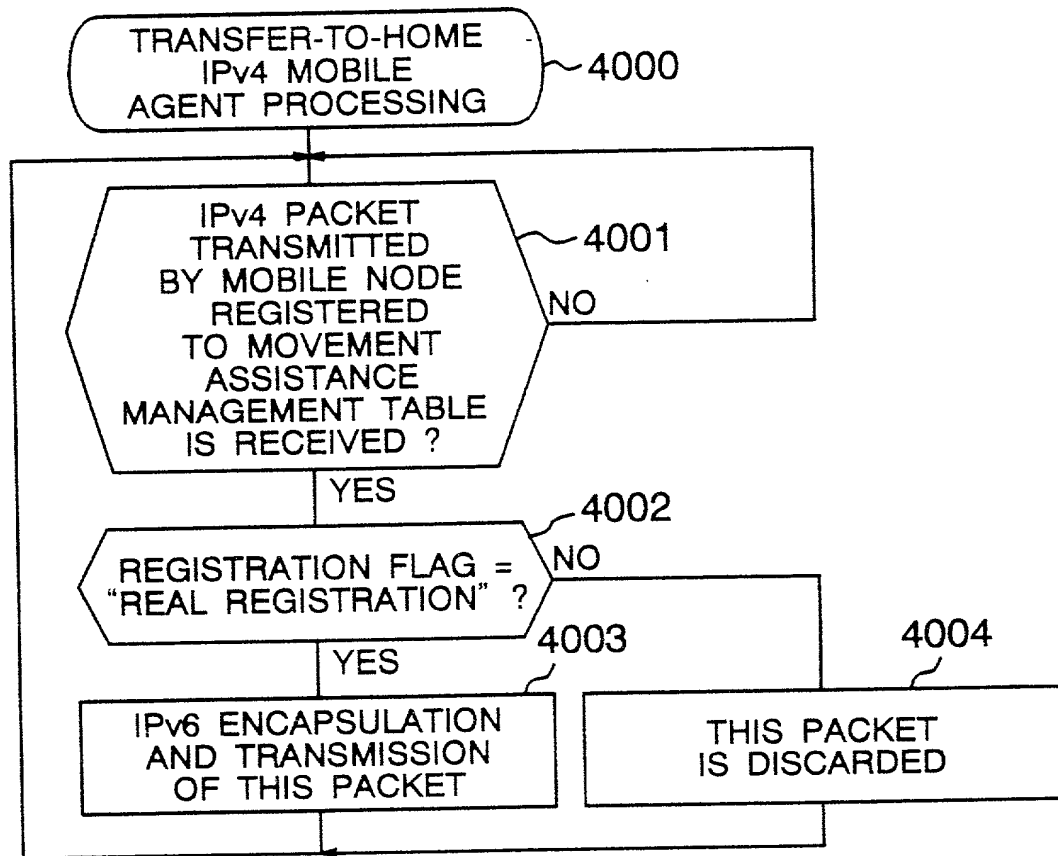


FIG. 41

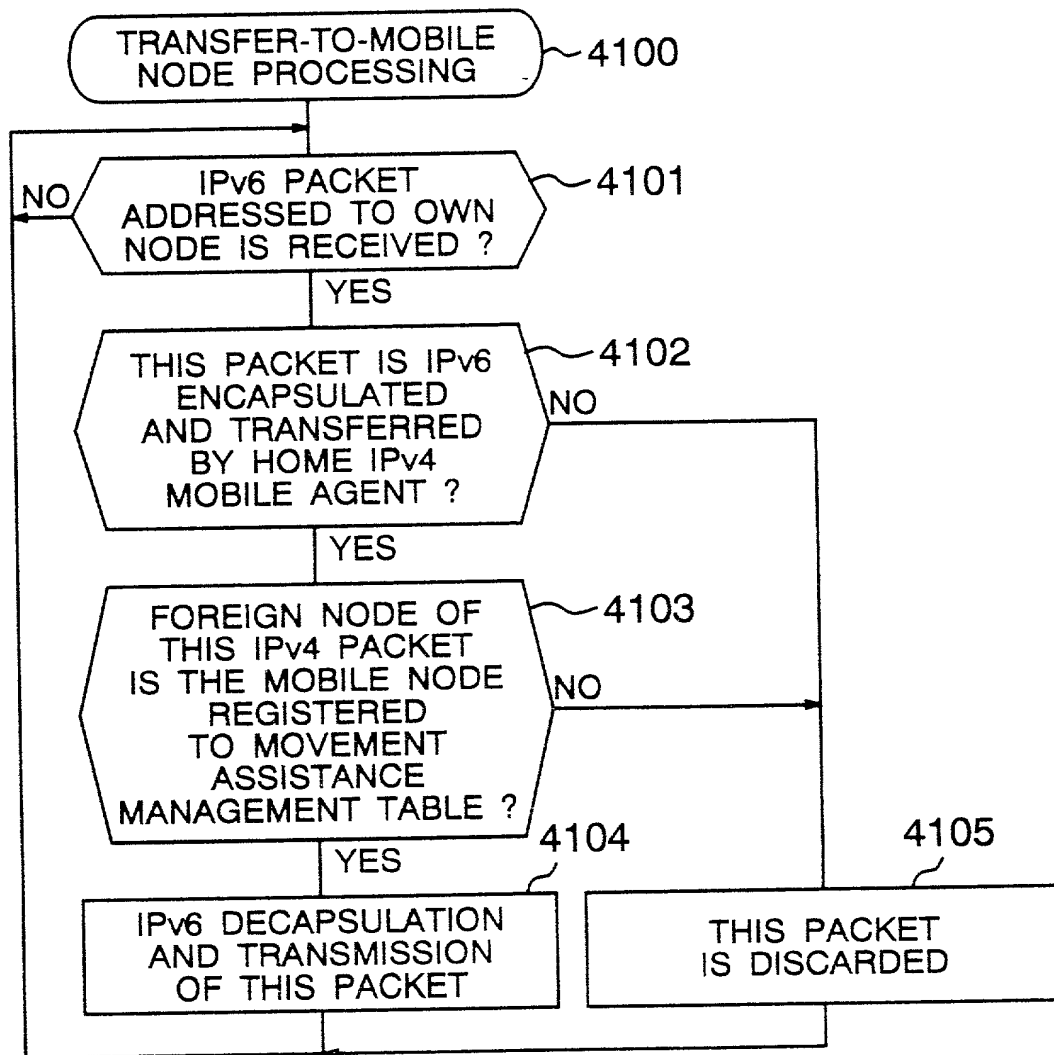


FIG. 42

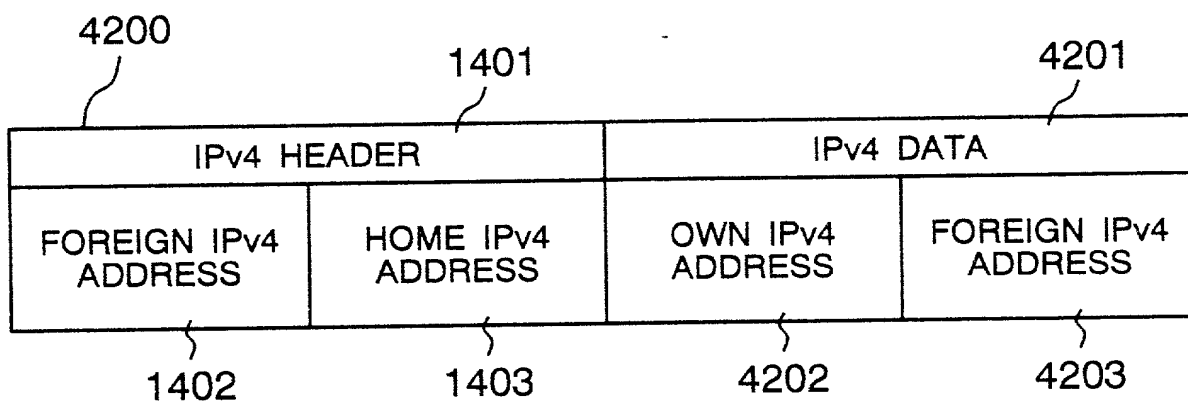


FIG. 43

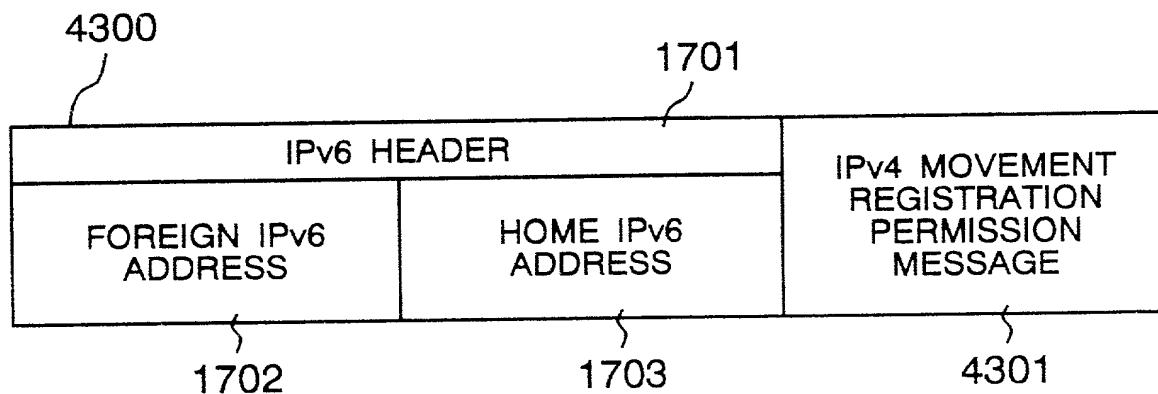


FIG. 44


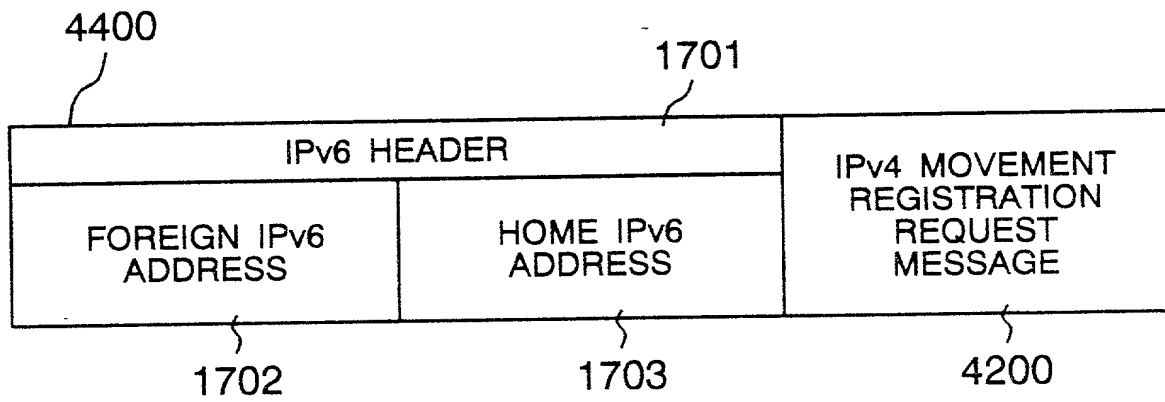


FIG. 45

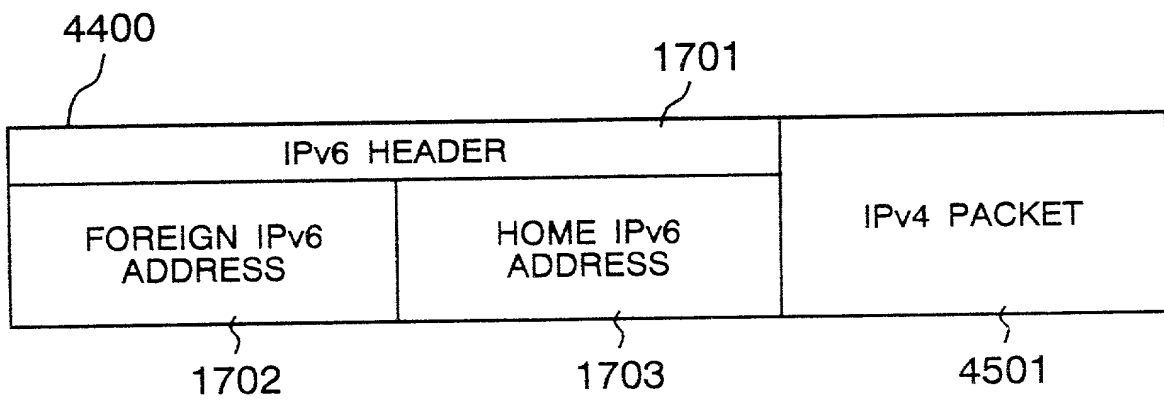

E3911-01
(*)
Copy

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which: (check one) ☒ is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>09-122323</u>	<u>Japan</u>	<u>13 May, 1997</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		
<u>09-216737</u>	<u>Japan</u>	<u>11 August, 1997</u>	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		
<u> </u>	<u> </u>	<u> </u>	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby appoint the following attorneys/agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application with full power of appointment and substitution of associate attorneys and agents, and to receive all patents which may issue thereon: Thomas E. Beall, Jr., Reg. No. 22,410; Michael J. Colitz, Reg. No. 37,010; Joseph D. Dreher, Reg. No. 37,123; Christopher B. Fagan, Reg. No. 22,987; Jude A. Fry, Reg. No. 33,340; John X. Garred, Reg. No. 31,330; Michael E. Hudzinski, Reg. No. 34,185; Jeffrey M. Ketchum, Reg. No. 31,174; Richard M. Klein, Reg. No. 33,000; Thomas E. Kocovsky, Jr., Reg. No. 23,383; Sandra M. Koenig, Reg. No. 33,722; Petar Kraguljac, Reg. No. 33,520; Scott A. McCollister, Reg. No. 33,961; James W. McKee, Reg. No. 26,482; Shrinath Malur, Reg. No. 34,663; John R. Mattingly, Reg. No. 30,293; Richard J. Minnich, Reg. No. 24,175; Jay F. Moldovanyi, Reg. No. 29,678; Philip J. Moy, Reg. No. 31,230; Timothy E. Nauman, Reg. No. 32,233; Sue Ellen Phillips, Reg. No. 32,046; Patrick R. Roche, Reg. No. 29,580; Alan J. Ross, Reg. No. 33,767; Albert P. Sharpe, III, Reg. No. 19,379; Daniel J. Stanger, Reg. No. 32,346; Eric A. Stephenson, Reg. No. 33,321; Mark S. Svat, Reg. No. 34,261; John C. Tiernan, Reg. No. 21,073; John M. Vasuta, Reg. No. 33,353. Address all correspondence to: FAY, SHARPE, BEALL, FAGAN, MINNICH & MCKEE

[X] 104 East Hume Avenue
Alexandria, Virginia 22301 (703) 634-1120

[] 1100 Superior Avenue, Suite 700
Cleveland, Ohio 44114 (216) 361-5532

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, Section 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

発明者

発明者フルネームサイン

氏名タイプ欄

Date April 28, 1998 Inventor Tatsuya Watanuki Tatsuya WATANUKI
(Typed Name and Signature)
Residence Yokohama-shi, Japan Citizenship Japan
Post Office Address 1677, Higashiyamatacho, Tsuzuki-ku, Yokohama-shi, Japan.

Date April 28, 1998 Inventor TETSUO OURA Tetsuo OURA
(Typed Name and Signature)
Residence Yokohama-shi, Japan Citizenship Japan
Post Office Address 23-18-201, Nakatanishi-2-chome, Izumi-ku, Yokohama-shi, Japan.

Date April 28, 1998 Inventor Sunao Sawada Sunao SAWADA
(Typed Name and Signature)
Residence Yokohama-shi, Japan Citizenship Japan
Post Office Address 9-3-212, Nagatadai, Minami-ku, Yokohama-shi, Japan.

Date _____ Inventor _____
(Typed Name and Signature)
Residence _____ Citizenship _____
Post Office Address _____

Date _____ Inventor _____
(Typed Name and Signature)
Residence _____ Citizenship _____
Post Office Address _____

Date _____ Inventor _____
(Typed Name and Signature)
Residence _____ Citizenship _____
Post Office Address _____